JIANSHENG DOOR&WINDOW HARDWARE

坚圣门窗五金 / 配件专家




JIANSHENG

JIANSHENG



JIANSHENG DOOR & WINDOW HARDWARE

坚圣门窗五金

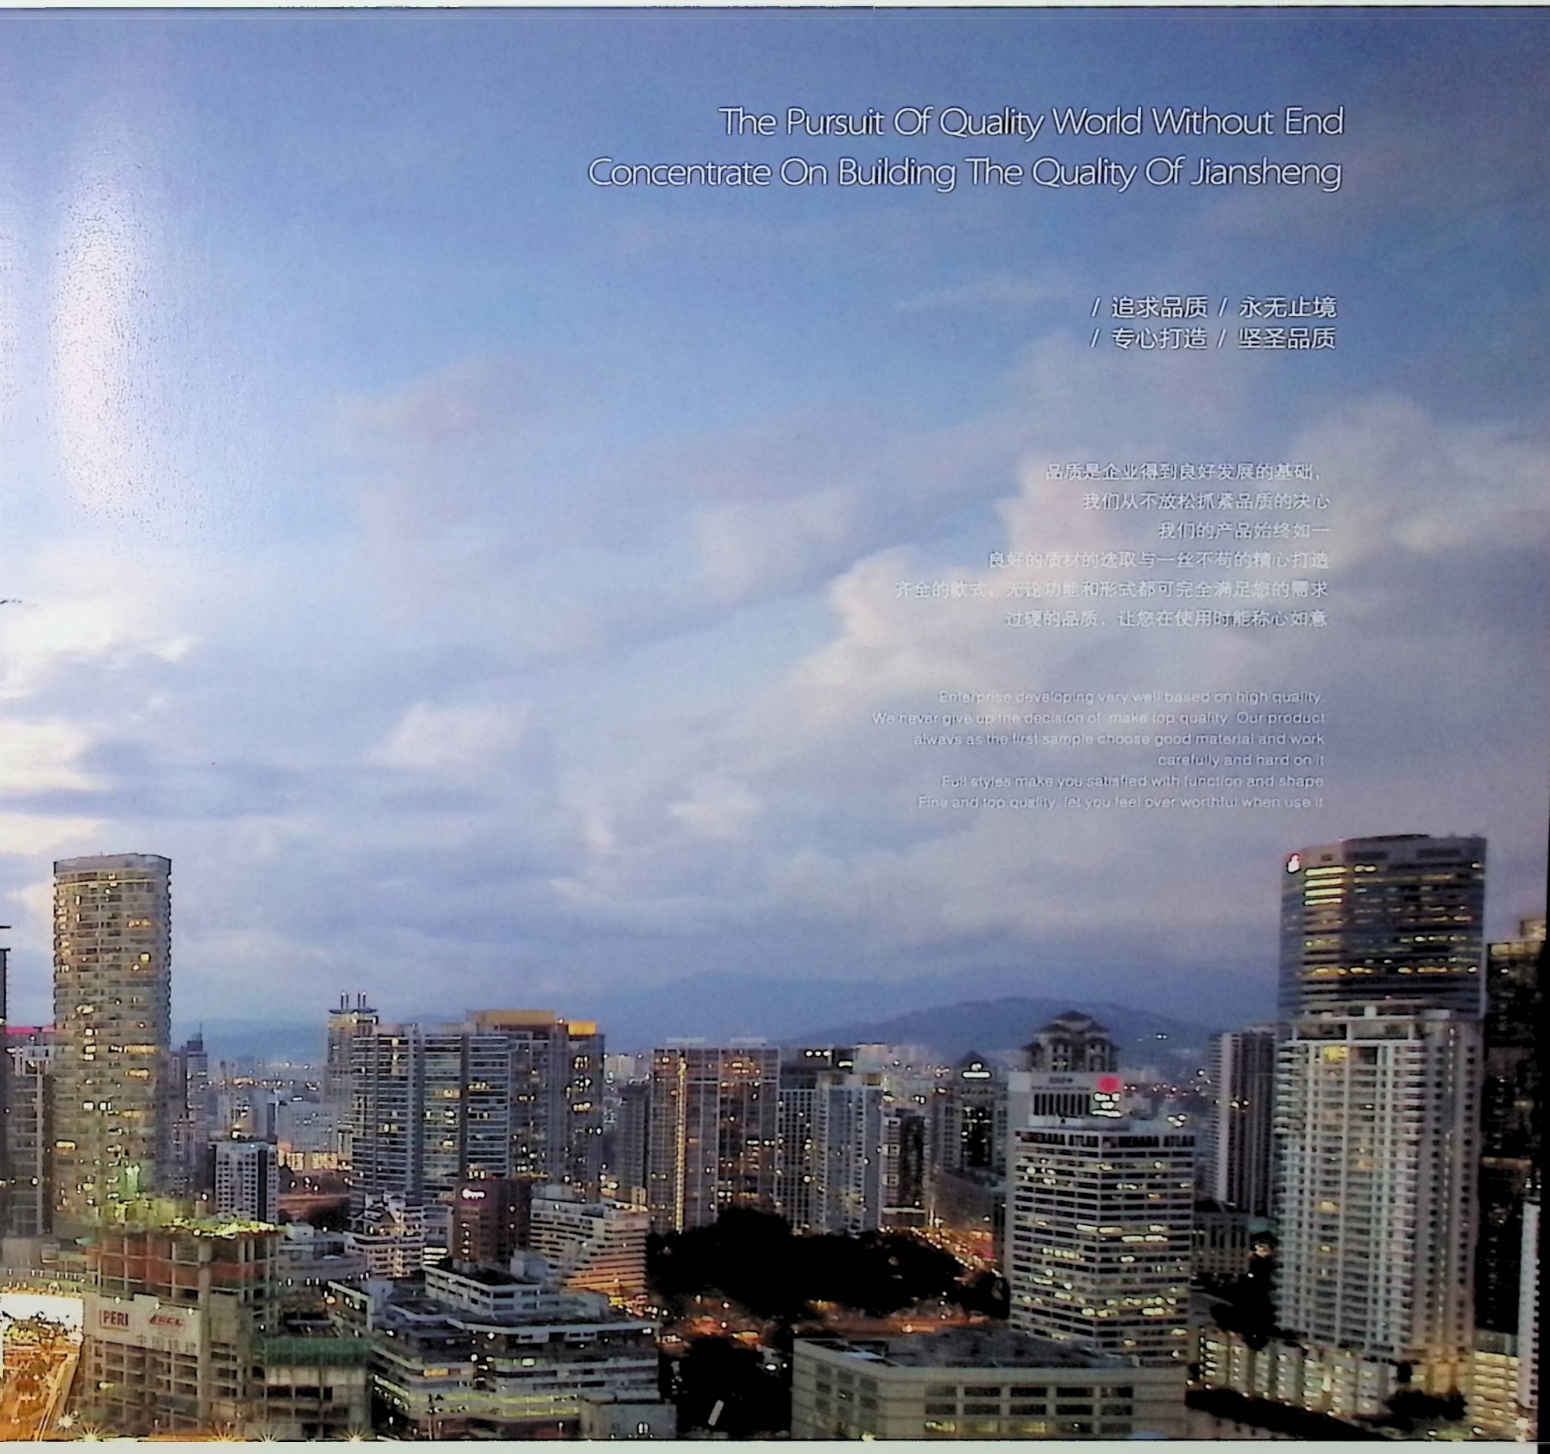

The Pursuit Of Quality World Without End
Concentrate On Building The Quality Of Jiansheng

/ 追求品质 / 永无止境
/ 专心打造 / 坚圣品质

品质是企业得到良好发展的基础，
我们从不放松抓紧品质的决心
我们的产品始终如一
良好的质材的选取与一丝不苟的精心打造
齐全的款式，无论功能和形式都可完全满足您的需求
过硬的品质，让您在使用时能称心如意

Enterprise developing very well based on high quality.
We never give up the decision of make top quality. Our product
always as the first sample choose good material and work
carefully and hard on it.
Full styles make you satisfied with function and shape.
Fine and top quality, let you feel over worthful when use it.

APPROACHING JIANSHENG TECHNOLOGICAL INNOVATION

走进坚圣 科技创新



香港坚圣五金国际集团·瑞安市坚圣门窗五金有限公司坐落于温州瑞安市门窗五金基地。坚圣五金是一家专业研发、生产铝合金、铝木、塑钢、幕墙、内开内倒、配件专家，设计、生产和销售在业内具有优势地位，拥有现代化大型标准厂房及先进自动化设备。

坚圣公司自创建以来，依托雄厚的资本实力、尖端的技术优势、优异的品质与专业的市场服务获得广大客户与同行业的一致好评，同时以配套齐全、货源充足、交货及时享誉业内。

本着市场需求为首位，以产品打造经典品牌，以全球作为市场定位，合理的价格，优质的服务。坚圣公司在发展中不断自我摸索更新和完善新理念新技术，使公司在激烈的市场竞争中保持高速的发展，形成了立足国内拓展国外的营销网络，产品销售逐步与东南亚及欧美地区等国际市场接轨。

坚圣公司热忱欢迎各界朋友和同仁莅临指导，愿与广大客户携手共进，共创美好未来。

旗下专业品牌 PROFESSIONAL BRAND

质量成就品牌，品牌代表质量


Quality accomplishes brand. Brand represents quality.

Hong Kong Jiansheng Hardware International Group · Rui' an Jiansheng Door and Window Hardware Co., Ltd. is located at Rui' an Door and Window Hardware Base in Wenzhou. As an expert specialized in researching, developing and producing aluminum alloy, aluminum wood and plastic steel curtains and horizontal pivoting window and fittings, Jiansheng Hardware is leading in the industry in the aspects of design, production and sale, owning modern large-sized standard factory buildings and advanced manufacturing equipment.

Since its establishment, Jiansheng Company has won deep favor from customers and its peers in the industry with powerful capital strength, top technological advantages, excellent quality and prominent market service and enjoyed a high reputation in the industry with complete auxiliary facilities, sufficient supply of goods and timely delivery.

By giving priority to market demand, creating classical brands through products, taking the world as the market orientation, and providing reasonable price and excellent service, Jiansheng Company is making continuous explorations and upgrading and improving new concepts and new technologies during its development, so as to maintain high-speed development of the company in the fierce market competition and form marketing networks throughout the world, bringing the sale of products in line with international markets such as Southeast Asia, Europe and America.

Jiansheng Company warmly expects friends from all circles to visit and instruct us and join hands with us for creating a brilliant future together.

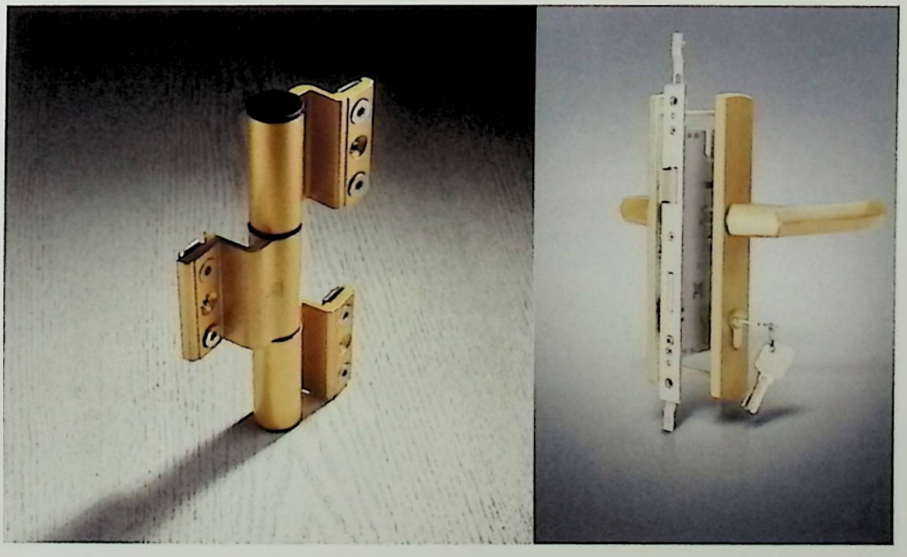







www.xgjswj.com
NAVIGATOR


坚圣门窗五金
JIANSHENG HARDWARE
JIANSHENG








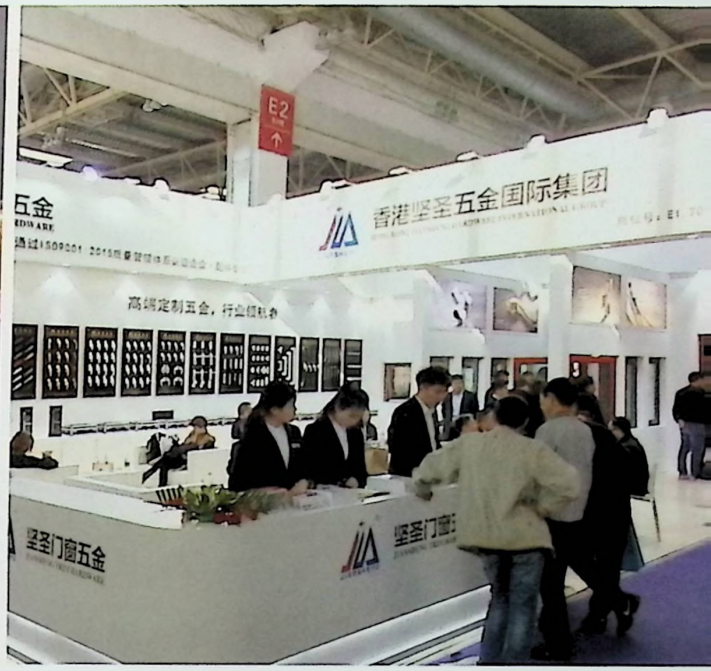







EXHIBITION HISTORY

展会历程

以人为本

以人文关照、追寻本源、创立品质，彰显一个企业无限拓展的活力坚圣，以人为本的关怀搭建起企业、客户、消费者共同发展的桥梁。

HUMAN-ORIENTATION

User-friendliness,origin seeking,quality excellence,All demonstrate the infinite vitality of an enterprise Hanlong builds the bridge for mutual development of enterprise,customers and consumers based on human-orientation

跨越未来

创造、创新是企业发展永恒主题，新时代的我们，用智慧和心血，使企业不断超越，创造美好的明天！

CROSSING THE FUTURE

Creation, innovation is the eternal theme of enterprise development, new times we, with wisdom and painstaking effort, make the enterprise constantly go beyond, to create a better tomorrow!



QUALITY BASED, STRICT AND TRUTH-SEEKING
品质为本，严谨务实

市场的发展速度
The Development Speed Of Maarket

速度的发展，在于人的力量。是前进的燃油产生灵感。是强劲的引擎创新策略，是把握的方向严谨模式，是发展的基础。综合动力理善于在崎岖的道路上比赛。


The speedy development lies in the power of people. It is the inspiration of the advancing oil, the innovative strategy of powerful engine, the strict mode in grasping direction, and the foundation for development. The comprehensive motive force enables us to compete on the cragged road more easily.

CATALOGUE/目录

01 C槽内开内倒
12 C槽铝木内开内倒
13 C槽隐形内开内倒
17 C槽防盗快装内开内倒
18 C槽炫开内倒侧滑
19 C槽外开外倒
21 C槽外开下悬
25 幕墙系列
26 塑钢内平开内倒系列
27 铝木内平开内倒13系列
29 执手系列
38 组合连接件系列
43 铝合金内外开节能微通风系统
44 铝合金内开两点锁系列
46 铝合金防盗锁两点锁系列
47 铝合金双向内开两点锁系列
48 铝合金内开天地锁系列
49 铝合金内开多点锁系列
50 铝合金内开两点锁系列
51 铝合金内开天地锁系列
52 铝条式两点锁内开系列
53 铝合金外开两点锁系列
55 铝条式两点锁外开系列
57 铝条式幕墙两点锁系列
58 铝条式两点锁外开系列
59 铝合金两点锁系列
60 欧标槽双外开金钢网系列
61 方钢式两点锁系列
63 铝杆系列
65 平开门锁系列
74 门锁扣板系列
75 锁芯系列
77 锁体系列
80 锁盒系列
83 外平开窗执手系列
85 方钢执手
90 金钢网纱窗配件系列
91 月牙锁系列
93 各种锁勾
94 合页系列
103 插销系列
104 风撑系列
105 滑撑系列
107 铰链系列
110 防坠落器系列
111 推拉钩锁系列
115 滑轮系列
116 角码系列
117 传动器系列
119 塑钢合页系列
120 角部铰链系列
121 智能开窗器系列
123 部分工程展示

SCHEMATIC DIAGRAM OF
20 EU HORIZONTAL PIVOTING WINDOW

JS-ND01 20槽欧标内开内倒示意图 /125 . 第一代 First Generation .

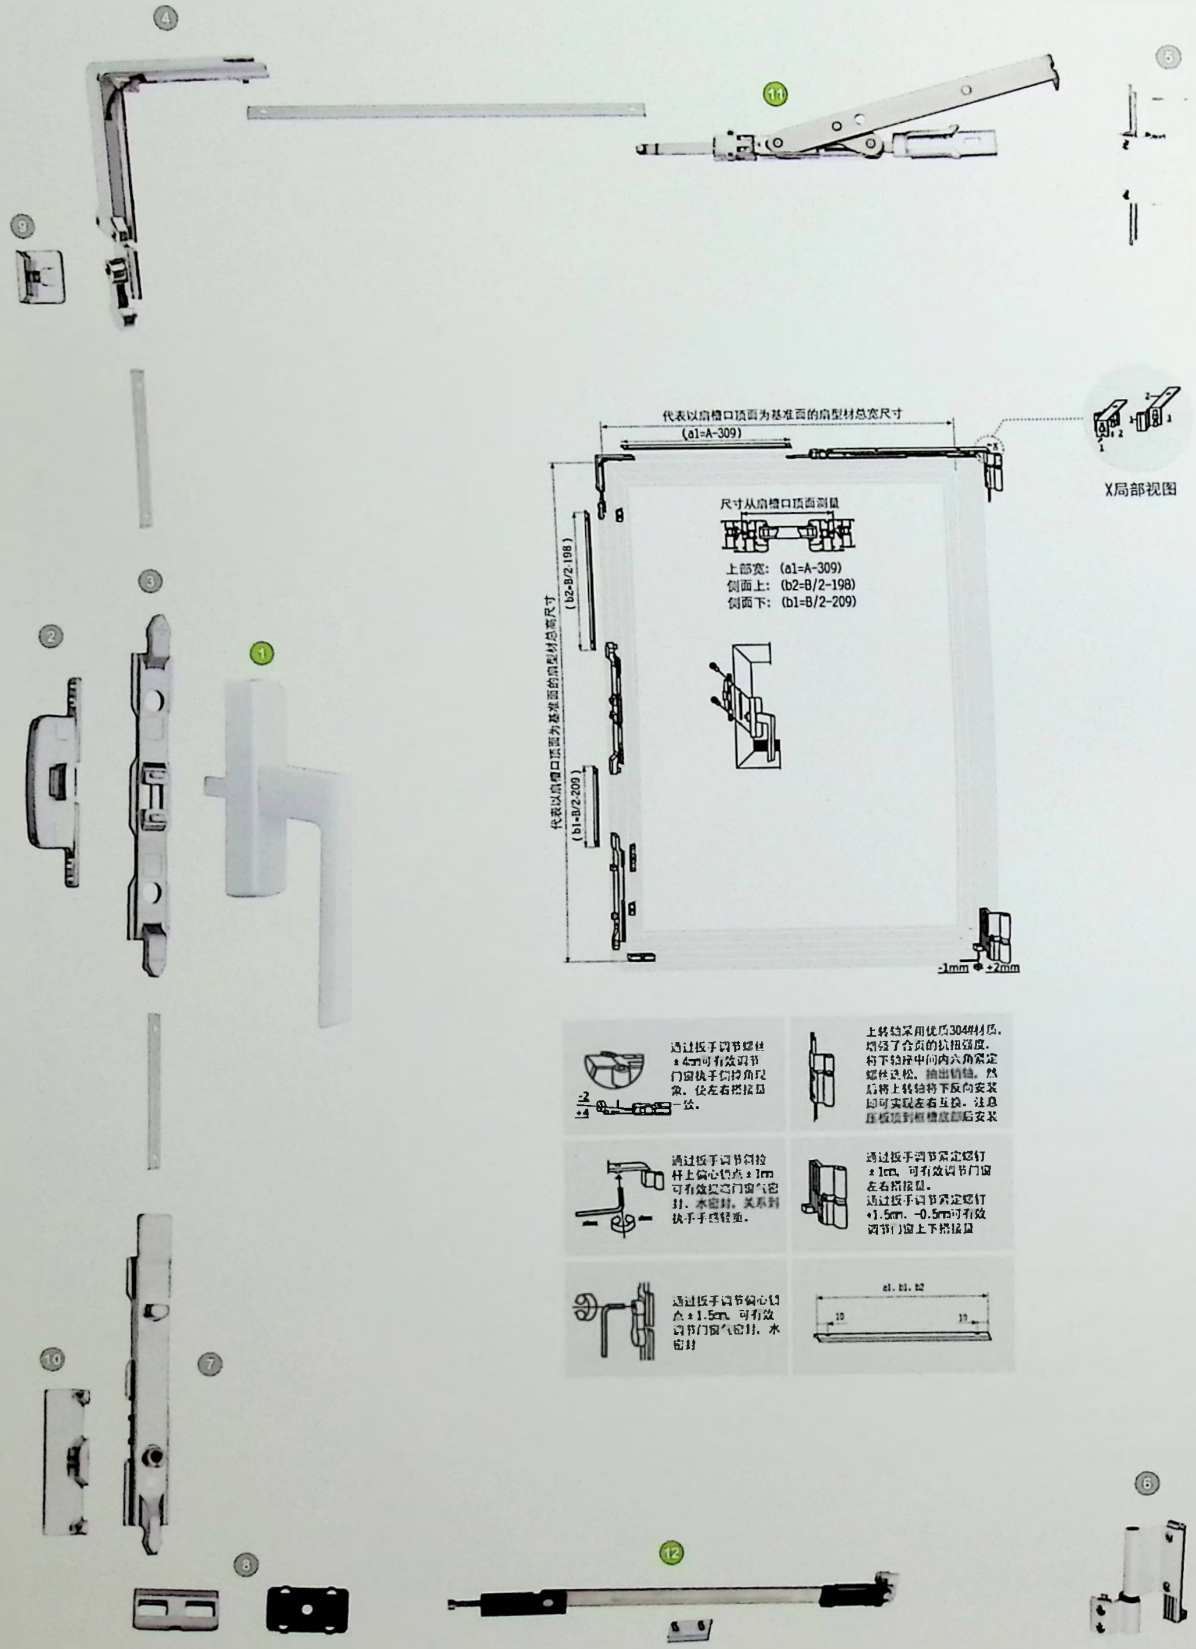

内开内倒五金件配置 / Horizontal pivoting window hardware fitting /


01
JS-802
内开执手
Swing-in handle


02

JS-A210
防误器
Error proofing machine

03


JS-B210
中连接件
Middle connector


04

JS-204
转向器
Redirector

05

JS-207
上合页
Upper hinge

06

JS-218
下合页
Lower hinge

07

JS-214
悬转支撑
Suspension support


08

JS-209
调节锁座，助升块
Regulated lock bracket and rise-helping block


09

JS-5007
锁扣
Lock fasteners

10

JS-211
防脱器
Anti-desquamation machine

11

JS-212
斜拉杆（扇宽小于600mm）
Diagonal Member
(sash width shall below 600mm)

03

JS-216
长斜拉杆（扇宽大于600mm）
Long diagonal member
(sash width shall over 600mm)

执手可选配 / Selected Mating /



- JS-802 - JS-803 - JS-823 - JS-825 - JS-820

配置说明 / Allocation explanation /

1、以上执手有多款可供选择(30页-37页)；
2、内平开下悬组件必要时可配欧标限位撑（JS-FC3036）以达到理想效果；
3、五金件不分左、右扇。

1. There are several kinds of handles for your choice (P30-P37).
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3036) for the best effect.
3. Hardware is not divided into left sash and right sash.

绿色标记为可供选择。
Green marking is available for choice

SCHEMATIC DIAGRAM FOR 20-GROOVED EU INWARD OPENING BOTTOM SUSPENSION WINDOW

JS-ND03 20槽欧标内平开下悬示意图 /125 . 第三代 Third Generation .



A.假设窗户20槽口从上测量到底下20槽口总高为920mm
- 上面铝条尺寸长度是b2=920÷2-134=326
- 下面铝条尺寸长度是b1=920÷2-271=189

B.假设窗户20槽口从左测量到右边20槽口总宽为620mm
- 铝条尺寸长度是a1=620-309

A. Suppose the window adopts 20 rebate, the total height is 920mm after measuring from the top to the bottom.
- The upper aluminum bar length is b2=920÷2-134=326
- The lower aluminum bar length is b1=920÷2-271=189

B. Suppose the window adopts 20 rebate, the total width is 620mm after measuring from the left to the right.
- The aluminum bar length is a1=620-309

Http://www.jgcsw.com
E-mail:jgcsw@163.com

内平开下悬五金件配置 / Tilting and turning sash opening inward hardware fitting /

01




JS-803
内开执手
Swing-in handle

02




JS-202
防误器
Error proofing machine

03



JS-204
转向器
Rectrector

04



JS-207
上合页
Upper hinge

05



JS-208
下合页
Lower hinge

06




JS-201
悬转支撑
Suspension support

07




JS-231
调节锁座，助升块
Regulated lock bracket and rise-helping block

08




JS-5007
锁扣
Lock fasteners

09




JS-201202
防脱器
Anti-desquamation machine

10



JS-212
斜拉杆（扇宽小于600mm）
Diagonal Member
(sash width shall below 600mm)

10



JS-216
长斜拉杆（扇宽大于600mm）
Long diagonal member
(sash width shall over 600mm)

执手可选配 / Selected Mating /



-JS-803　-JS-804　-JS-813　-JS-823　-JS-816

配置说明 / Allocation explanation /


1、以上执手有多款可供选择(30页-37页)；
2、内平开下悬组件必要时可配欧槽限位撑（JS-FC3036）以达到理想效果；
3、五金件不分左、右扇。

1. There are several kinds of handles for your choice(P30-P37);
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3036) for the best effect;
3. Hardware is not divided into left sash and right sash.

绿色标记为可供选择。
Green marking is available for choice

SCHEMATIC DIAGRAM OF 20 EU HORIZONTAL PIVOTING WINDOW

JS-ND06 20槽欧标内开内倒示意图 喷塑135/古铜160 . 第二代 Second Generation . (仿古铜色 Antique brass)

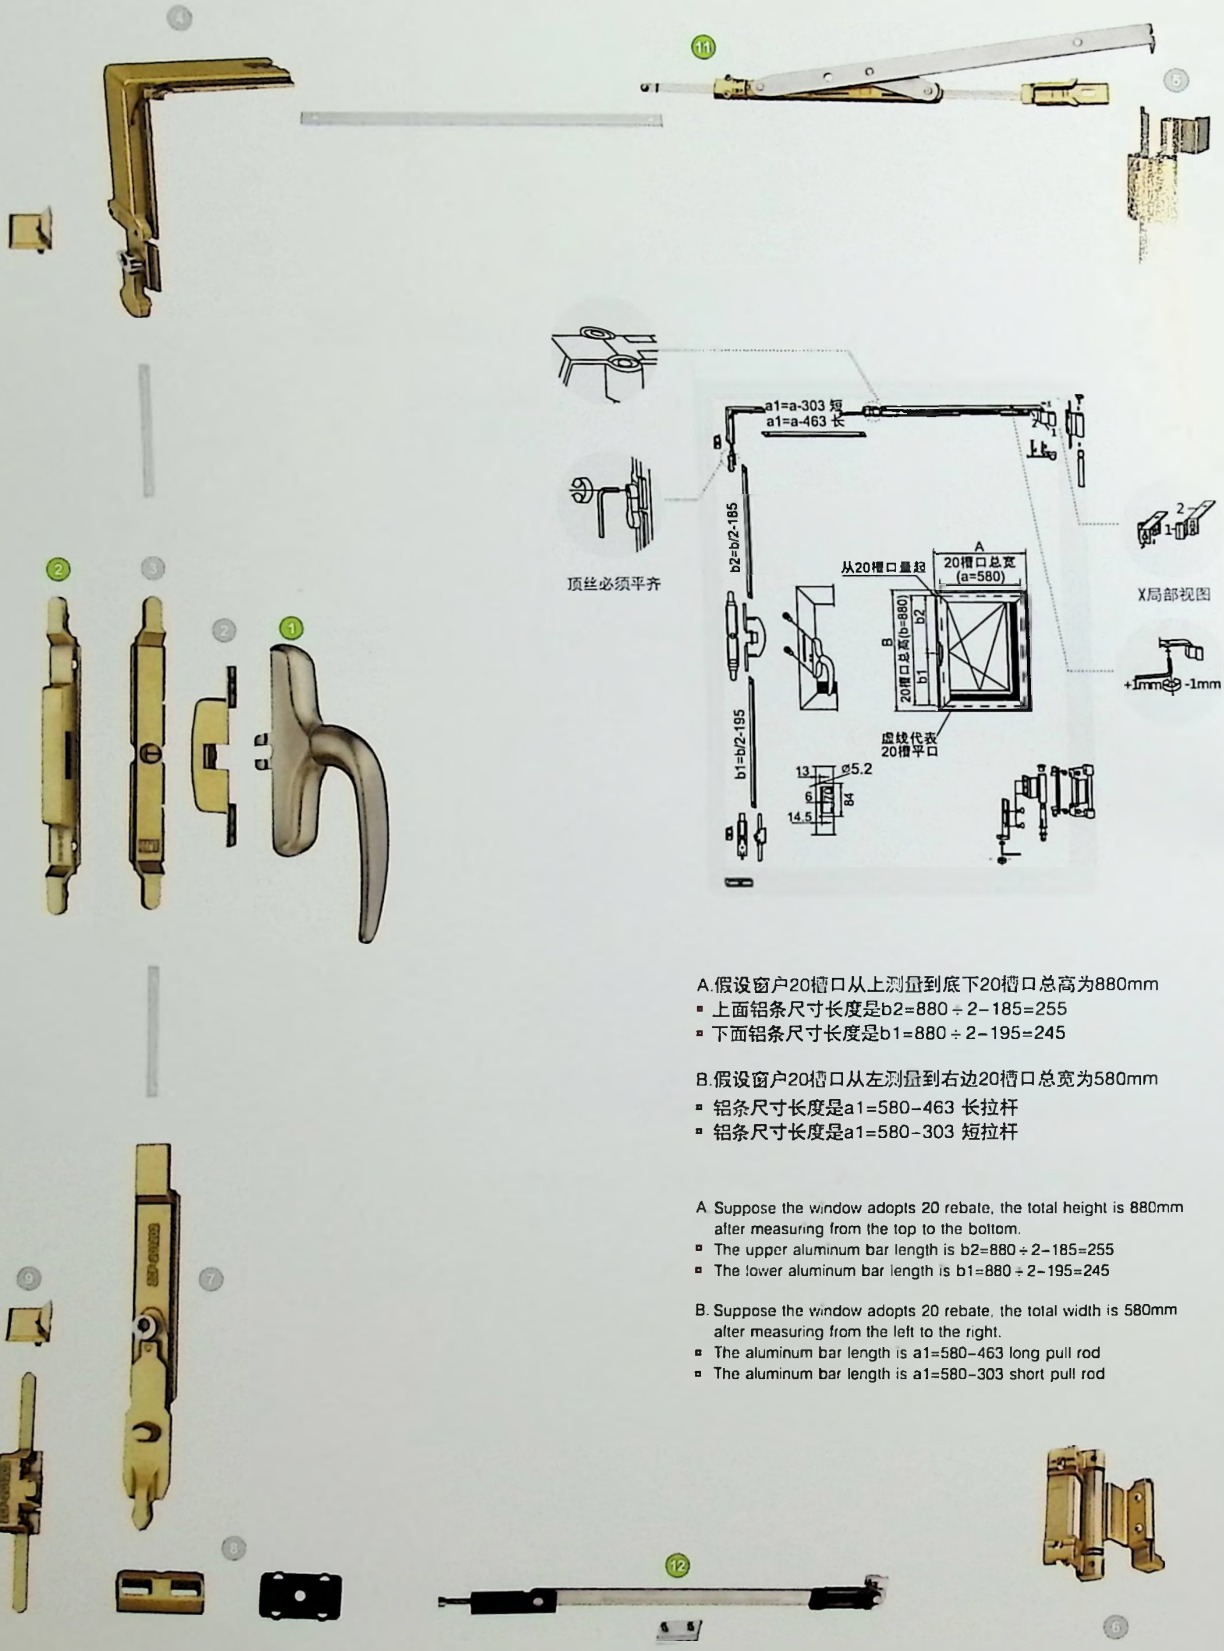

A.假设窗户20槽口从上测量到底下20槽口总高为880mm
- 上面铝条尺寸长度是b2=880÷2-185=255
- 下面铝条尺寸长度是b1=880÷2-195=245

B.假设窗户20槽口从左测量到右边20槽口总宽为580mm
- 铝条尺寸长度是a1=580-463 长拉杆
- 铝条尺寸长度是a1=580-303 短拉杆

A. Suppose the window adopts 20 rebate, the total height is 880mm after measuring from the top to the bottom.
- The upper aluminum bar length is b2=880÷2-185=255
- The lower aluminum bar length is b1=880÷2-195=245

B. Suppose the window adopts 20 rebate, the total width is 580mm after measuring from the left to the right.
- The aluminum bar length is a1=580-463 long pull rod
- The aluminum bar length is a1=580-303 short pull rod

Http://www.xgsaj.com
E-mail:xgsaj@163.com

内开内倒五金件配置 / Horizontal pivoting window hardware fitting /

01


JS-804
内开执手
Swing-in handle


02


JS-210
防误器
Error proofing machine

03

JS-213
中连接件
Middle connector


04

JS-204
转向器
Redirector

05

JS-207
上合页
Upper hinge

06

JS-218
下合页
Lower hinge

07

JS-201
悬转支撑
Suspension support


08

JS-209
调节锁座，助升块
Regulated lock bracket and rise-helping block

09

JS-5001
锁扣
Lock fasteners

10

JS-2012
防脱器
Anti-desquamation machine

11

JS-212
斜拉杆（扇宽小于600mm）
Diagonal Member
(sash width shall below 600mm)

01

JS-216
长斜拉杆（扇宽大于600mm）
Long diagonal member
(sash width shall over 600mm)

执手可选配 / Selected Mating /


- JS-804


- JS-840


- JS-841


- JS-841


- JS-841

配置说明 / Allocation explanation /


1、以上执手有多款可供选择(30页-37页)；
2、内平开下悬组件必要时可配欧槽限位撑（JS-FC3036）以达到理想效果；
3、五金件不分左、右扇。

1. There are several kinds of handles for your choice (P30-P37).
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3036) for the best effect.
3. Hardware is not divided into left sash and right sash.

绿色标记为可供选择。
Green marking is available for choice

SCHEMATIC DIAGRAM FOR 20-GROOVED EU INWARD OPENING BOTTOM SUSPENSION WINDOW

JS-ND04 20槽欧标内平开下悬示意图 /165 . 大型门窗实用 .

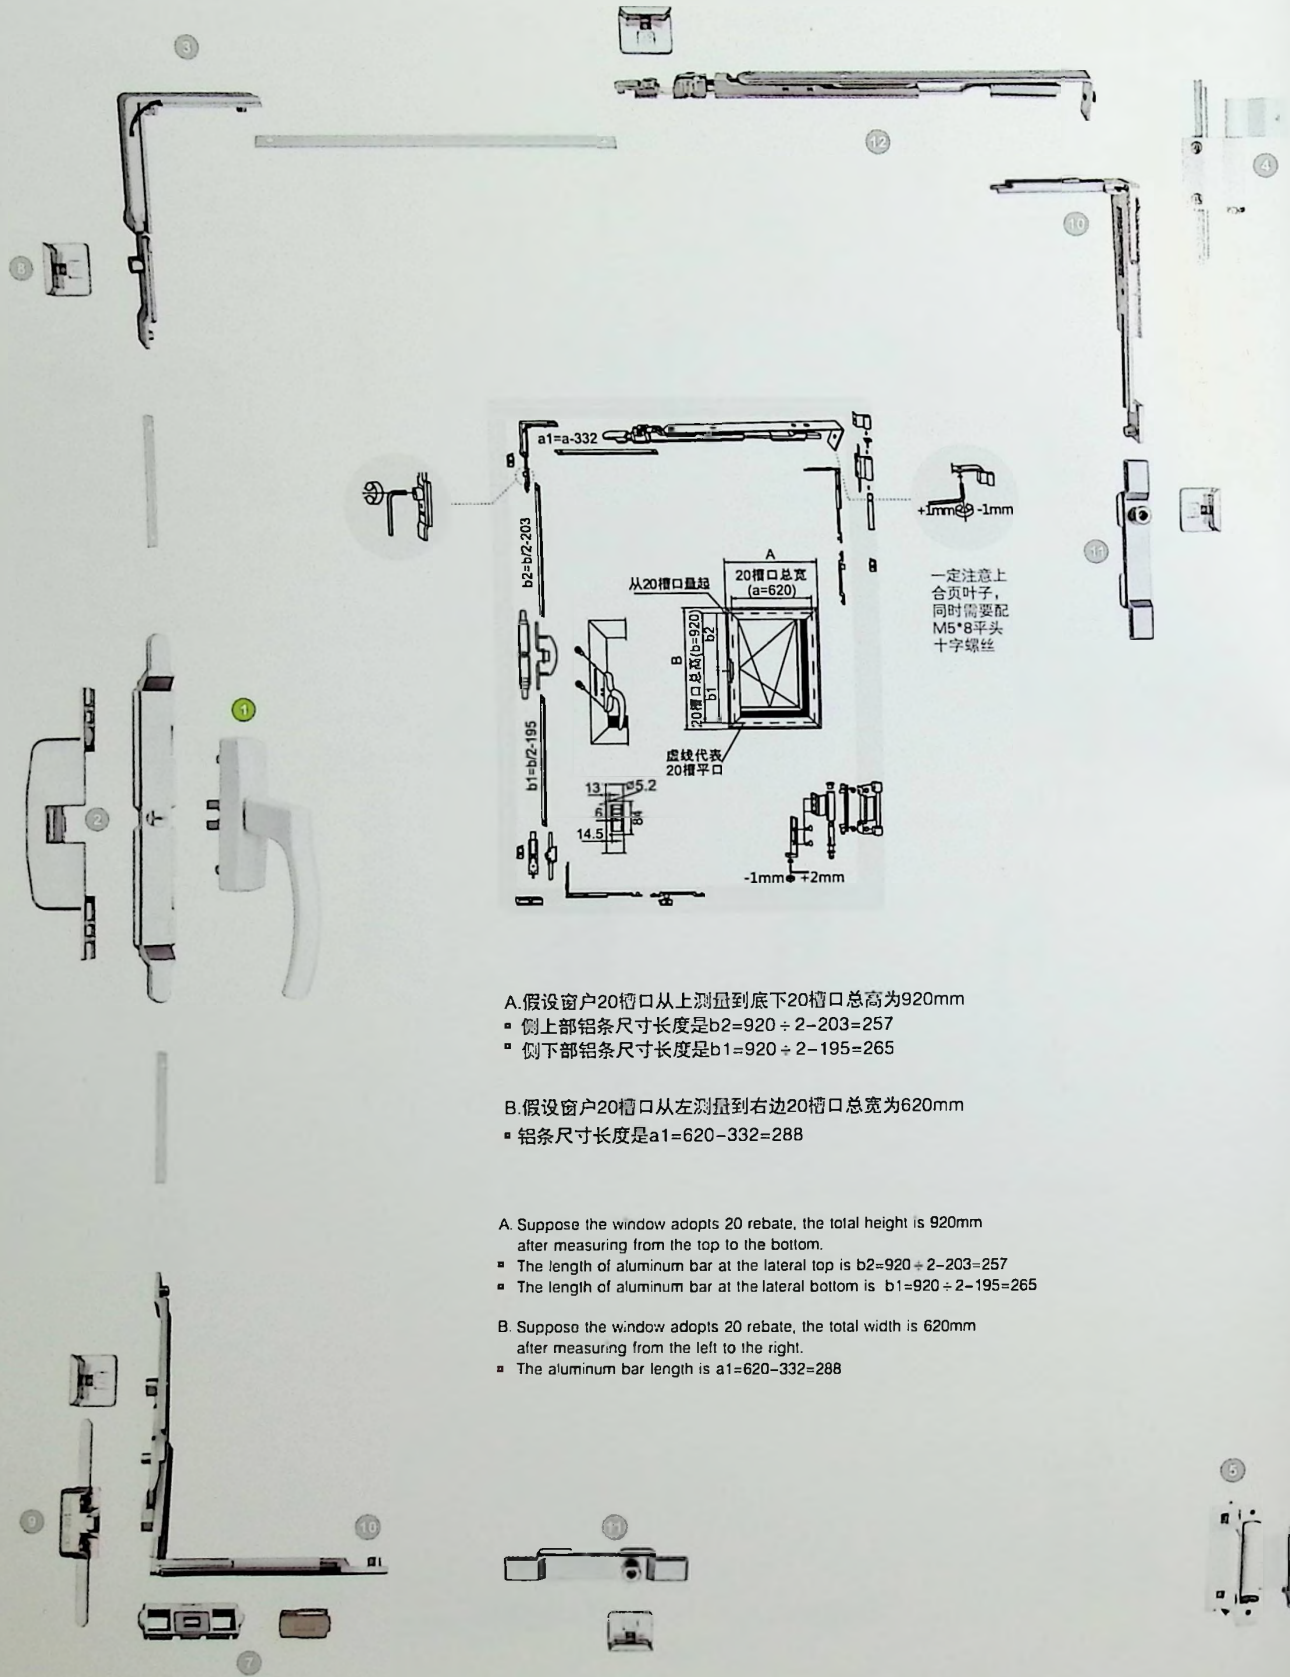

A.假设窗户20槽口从上测量到底下20槽口总高为920mm
- 侧上部铝条尺寸长度是b2=920÷2-203=257
- 侧下部铝条尺寸长度是b1=920÷2-195=265

B.假设窗户20槽口从左测量到右边20槽口总宽为620mm
- 铝条尺寸长度是a1=620-332=288


A. Suppose the window adopts 20 rebate, the total height is 920mm after measuring from the top to the bottom.
- The length of aluminum bar at the lateral top is b2=920÷2-203=257
- The length of aluminum bar at the lateral bottom is b1=920÷2-195=265

B. Suppose the window adopts 20 rebate, the total width is 620mm after measuring from the left to the right.
- The aluminum bar length is a1=620-332=288

内平开下悬五金件配置 / Tilting and turning sash opening inward hardware fitting /


01

JS-816
内开执手
Swing-in handle

02

JS-210
防误器
Error proofing machine


03


JS-204A
转向器
Redirector

04

JS-HY5748
上合页
Upper hinge

05


JS-229
下合页
Lower hinge

06

JS-230
悬转支撑
Suspension support

07

JS-LJ223
调节锁座H
Regulated lock bracket H

08

JS-5007
锁扣
Lock fasteners

09

JS-201202
防脱器
Anti-desquamation machine

10

JS-221
后备转角
Backup diverter


11


JS-LJ2005
多点连接件
Multi-point connection part

12

JS-LJ224
斜拉杆H
Diagonal member H


执手可选配 / Selected Mating /


- JS-816


- JS-802


- JS-801


- JS-821


- JS-806

配置说明 / Allocation explanation /

1、以上执手有多款可供选择(30页-37页)；
2、内平开下悬组件必要时可配欧标限位撑（JS-FC3036）以达到理想效果；
3、五金件不分左、右扇。


1. There are several kinds of handles for your choice(P30-P37).
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3036) for the best effect.
3. Hardware is not divided into left sash and right sash.

绿色标记为可供选择。
Green marking is available for choice


E STYLE DOUBLE LEATHER LACE HORIZONTAL PIVOTING WINDOW

E款双皮条内开内倒 /125

(合页搭接量12cm)

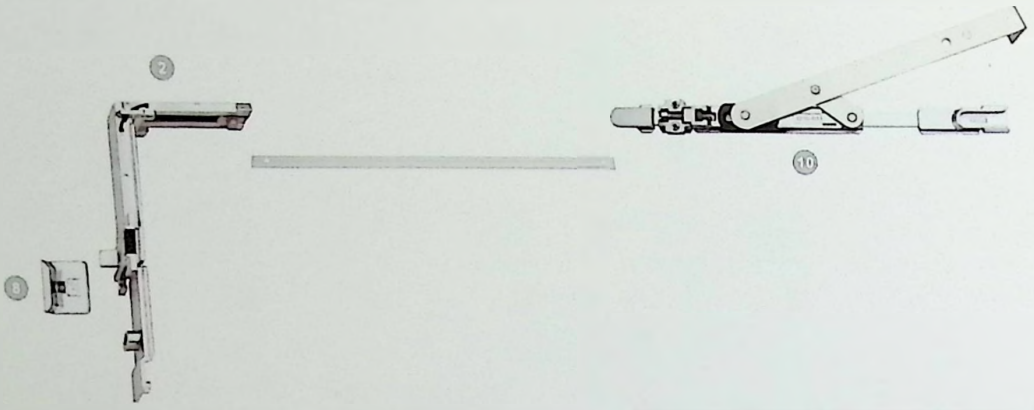



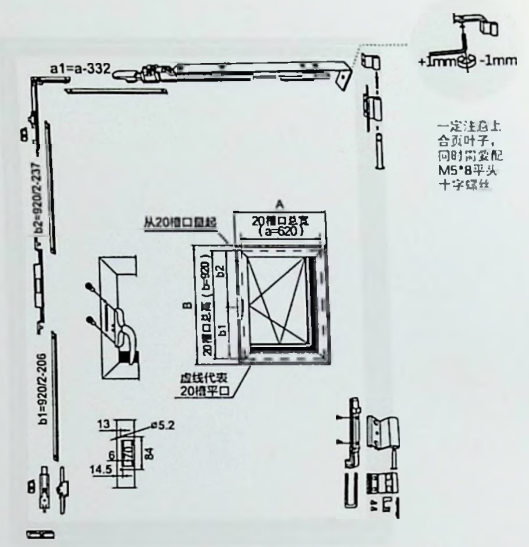

一定注意上合页叶子，同时需配M5*8平头十字螺丝



A.假设窗户20槽口从上测量到底下20槽口总高为920mm
- 侧上部铝条尺寸长度是b2=920÷2-237=223
- 侧下部铝条尺寸长度是b1=920÷2-206=254


B.假设窗户20槽口从左测量到右边20槽口总宽为620mm
- 铝条尺寸长度是a1=620-332=288


C.合页搭接量12cm.

A. Suppose the window adopts 20 rebate, the total height is 920mm after measuring from the top to the bottom.
- The length of aluminum bar at the lateral top is b2=920÷2-237=223
- The length of aluminum bar at the lateral bottom is b1=920÷2-206=254

B. Suppose the window adopts 20 rebate, the total width is 620mm after measuring from the left to the right.
- The aluminum bar length is a1=620-332=288

C. The hinge lap amount is 12cm.

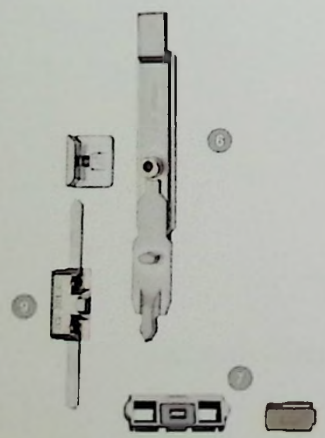





Http://www.xxxxx.com
E-mail:xxxxx@163.com

内开内倒五金件配置 / Horizontal pivoting window hardware fitting /

01



JS-823
内开执手
Swing-in handle

02




JS-218
转向器
Redirector

03



JS-201203
长中连接
Long·medium connection piece

04 搭接量12cm




JS-HY5748
上合页
Upper hinge

05 搭接量12cm



JS-HY5749
下合页
Lower hinge

06




JS-201
悬转支撑
Suspension support

07



JS-LJ223
调节锁座H
Regulated lock bracket H

08



JS-5007
锁扣
Lock fasteners

09




JS-201202
防脱器
Anti-desquamation machine

10



JS-219
斜拉杆（扇宽小于600mm）
Diagonal member (sash width shall below 600mm)


执手可选配 / Selected Mating /



- JS-804



- JS-820



- JS-823



- JS-839



- JS-837

配置说明 / Allocation explanation /

1、以上执手有多款可供选择(30页-37页)；
2、内平开下悬组件必要时可配欧标限位撑（JS-FC3036）以达到理想效果；
3、五金件不分左、右扇。

1. There are several kinds of handles for your choice (P30-P37);
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3036) for the best effect;
3. Hardware is not divided into left sash and right sash.

绿色标记为可供选择。
Green marking is available for choice

SCHEMATIC DIAGRAM OF 20 REBATE EUROPEAN STANDARD TILTING AND TURNING SASH OPENING INWARD

JS-ND08 20槽欧标内平开下悬示意图 喷塑130/氧化160

(重型合页) Heavy hinge



内平开下悬五金件配置 / Tilting and turning sash opening inward hardware fitting

01 JS-829 内开执手 Swing-in handle	02 JS-LJ219 防误转角器H Error proofing diverter H	03 JS-LJ220 中连接件H Medium connection piece H	04 JS-5748 上合页H Upper hinge H
05 JS-5749 调节下合页 Lower hinge	06 JS-LJ221 防脱器H Anti-desquamation machine H	07 JS-5007 锁扣 Lock fasteners	08 JS-LJ222 悬转支撑H Suspension support H
09 JS-LJ223 调节锁座H Regulated lock bracket H	10 JS-3039 伸缩风撑 Telescopic wind bracing	11 JS-LJ224 斜拉杆H Diagonal member H	

配置说明 / Allocation explanation /


1、以上执手有多款可供选择(30页-37页)；
2、内平开下悬组件必要时可配欧槽限位撑（JS-FC3039）以达到理想效果；
3、五金件不分左、右扇。

1. There are several kinds of handles for your choice(P30-P37);
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3039) for the best effect;
3. Hardware is not divided into left sash and right sash.

绿色标记为可供选择。
Green marking is available for choice


20-GROOVE EUROPEAN STANDARD ALUMINUM-WOOD TILTING AND TURNING SASH OPENING INWARD SCHEMATIC DIAGRAM

JS-ND09 20槽欧标铝木内平开下悬示意图 喷塑130/氟化160

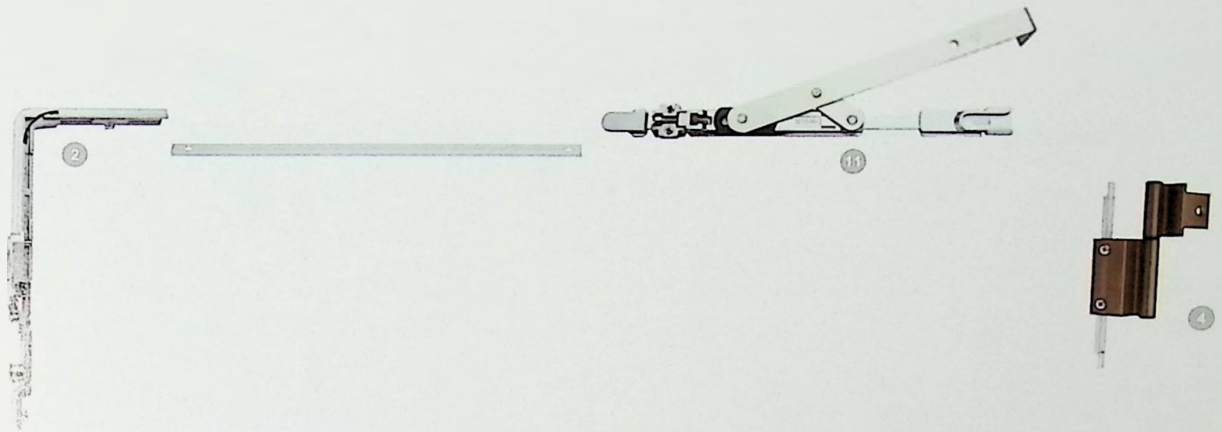

内平开下悬五金件配置 / Tilting and turning sash opening inward hardware fitting /

01 JS-ZS835 弓形指纹执手(内开) Bow shaped fingerprint handle (internal open) 锁量17/锁长36	02 JS-LJ219 防误转角器H Error proofing diverter H	03 JS-LJ220 中连接件H Medium connection piece H	04 JS-5750 铝木上合页 Aluminum-wood upper hinge
05 JS-5751 铝木下合页 Aluminum-wood lower hinge	06 JS-LJ224 铝木防脱器 Anti-desquamation machine	07 JS-5020 锁扣 Lock fasteners	08 JS-LJ222 悬转支撑H Suspension support H
09 JS-LJ223 四节锁座H Regulated lock bracket H	10 JS-3039 伸缩风撑 Telescopic wind bracing	11 JS-219 斜拉杆(扇宽小于600mm) Diagonal member (sash width shall below 600mm)	

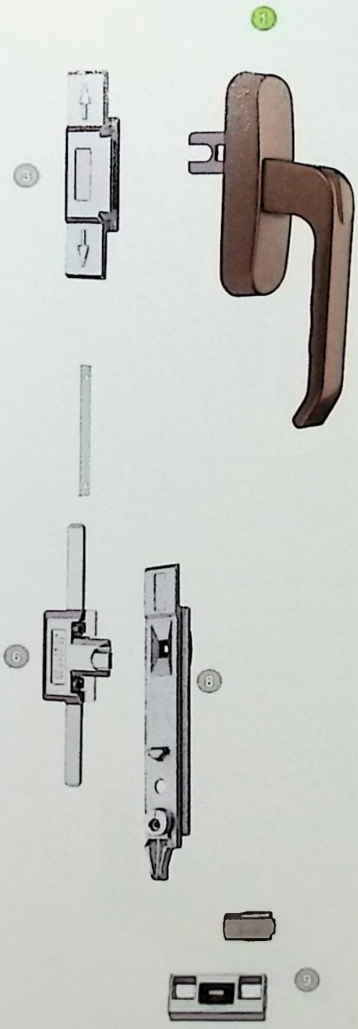


配置说明 / Allocation explanation /

1、以上执手有多款可供选择(30页-37页)；
2、内平开下悬组件必要时可配欧标限位撑（JS-FC3039）以达到理想效果；
3、五金件不分左、右扇。

1. There are several kinds of handles for your choice (P30-P37);
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3039) for the best effect;
3. Hardware is not divided into left sash and right sash.


绿色标记为可供选择。
Green marking is available for choice







SCHEMATIC DIAGRAM FOR 20-GROOVED HIDDEN TILT-TURN WINDOW

JS-ND05 20槽隐形式内开内倒示意图 不配执手165/锁盒180

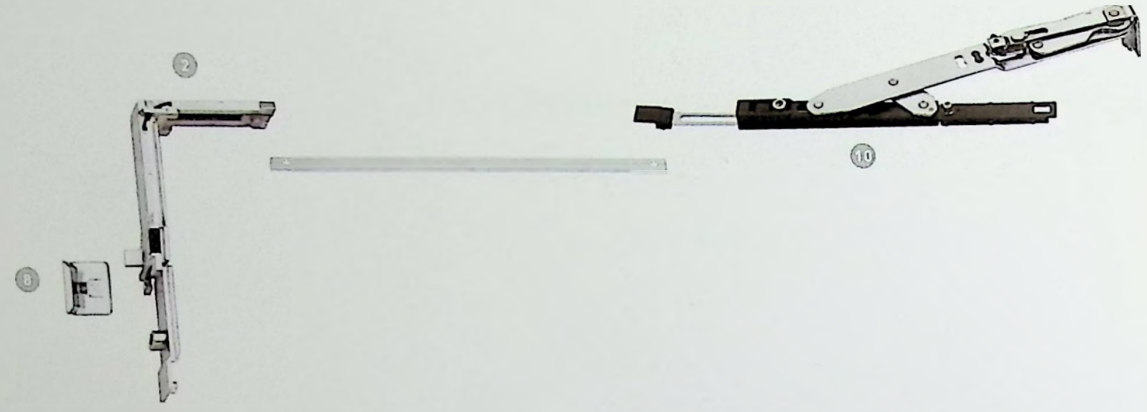


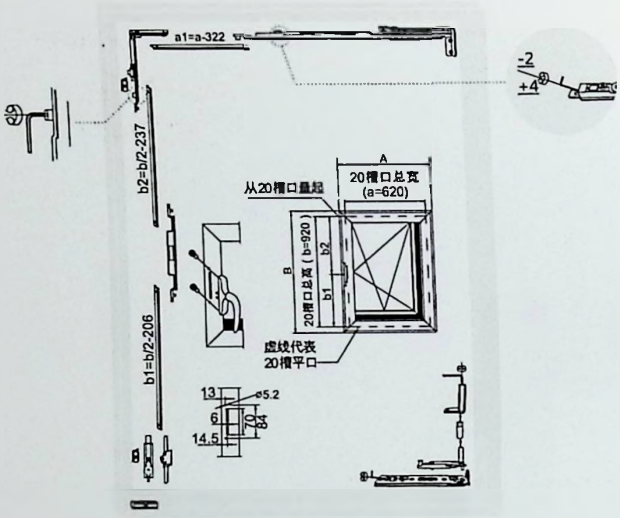

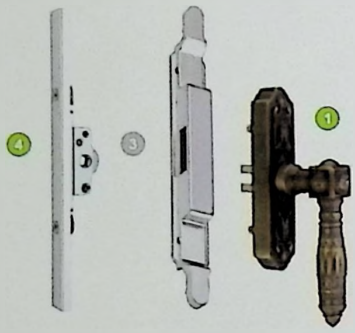


A.假设窗户20槽口从上测量到底下20槽口总高为920mm
- 上面铝条尺寸长度是b2=920÷2-237=223
- 下面铝条尺寸长度是b1=920÷2-206=254

B.假设窗户20槽口从左测量到右边20槽口总宽为620mm
- 铝条尺寸长度是a1=620-322=298

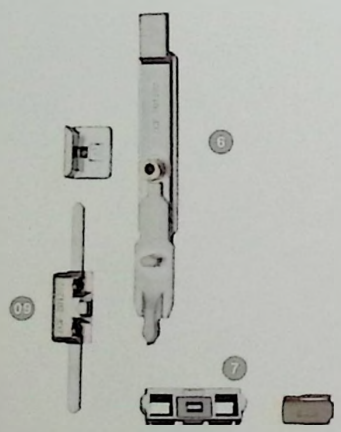

A. Suppose the window adopts 20 rebate, the total height is 920mm after measuring from the top to the bottom.
- The upper aluminum bar length is b2=920÷2-237=223
- The lower aluminum bar length is b1=920÷2-206=254

B. Suppose the window adopts 20 rebate, the total width is 620mm after measuring from the left to the right.
- The aluminum bar length is a1=620-322=298




隐形式内开内倒五金件配置 / Hidden tilt-turn window hardware fitting /


01


JS-841
内开执手
Swing-in handle


02

JS-218
转向器
Redirector

03

JS-201203
长中连接
Long-medium connection piece


04

JS-SH1009
内倒15锁盒
Horizontal pivoting 15 lock box


05

JS-5741
隐形下合页
Concealed lower hinge

06

JS-201
悬转支撑
Suspension support

07

JS-LJ223
调节锁座H
Regulated lock bracket H

08

JS-5007
锁扣
Lock fasteners

09

JS-201202
防脱器
Anti-desquamation machine

10

JS-226
隐形斜拉杆（扇宽小于600mm）
(sash width shall below 600mm)


执手可选配 / Selected Mating /


- JS-841


- JS-840


- JS-835


- JS-834


- JS-829

配置说明 / Allocation explanation /

1、以上执手有多款可供选择(30页-37页)；
2、内平开下悬组件必要时可配欧槽限位撑（JS-FC3039）以达到理想效果；
3、五金件分左、右扇。

1. There are several kinds of handles for your choice(P30-P37).
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3039) for the best effect.
3. Hardware is divided into left sash and right sash.

绿色标记为可供选择。
Green marking is available for choice.

20-GROOVE NVISIBLE LOCK BOX
HORIZONTAL PIVOTING WINDOW SCHEMATIC DIAGRAM

JS-ND11 20槽隐形锁盒内开内倒示意图 不配执手180



内平开下悬五金件配置 / Tilting and turning sash opening inward hardware fitting /

01 JS-SG8040 米兰执手 Milan handle	02 JS-LJ219 防误转角器H Error proofing diverter H	03 JS-SH1009 内倒15锁盒 Horizontal pivoting 15 lock box	04 JS-LJ221 防脱器H Anti-desquomation machine H
05 JS-5007 锁扣 Lock fasteners	06 JS-LJ222 悬转支撑H Suspension support H	07 JS-LJ223 调节锁座H Regulated lock bracket H	08 JS-5741 隐形下合页 Concealed lower hinge
09 JS-226 隐形斜拉杆(扇宽小于600mm) (sash width shall below 600mm)			

配置说明 / Allocation explanation /


1、以上执手有多款可供选择(85页-89页)；
2、内平开下悬组件必要时可配欧槽限位撑（JS-FC3039）以达到理想效果；
3、五金件分左、右扇,开启90度。


1. There are several kinds of handles for your choice (P83-P86);
2. If necessary, swing in lower suspension parts can be matched with European groove limit support (JS-FC3039) for the best effect;
3. Hardware is divided into left sash and right sash,Opening 90 degrees.


绿色标记为可供选择。
Green marking is available for choice


20-GROOVE LOCK BOX HORIZONTAL PIVOTING WINDOW SCHEMATIC DIAGRAM


JS-ND07 20槽锁盒内开内倒示意图 [illegible]160/[illegible]300

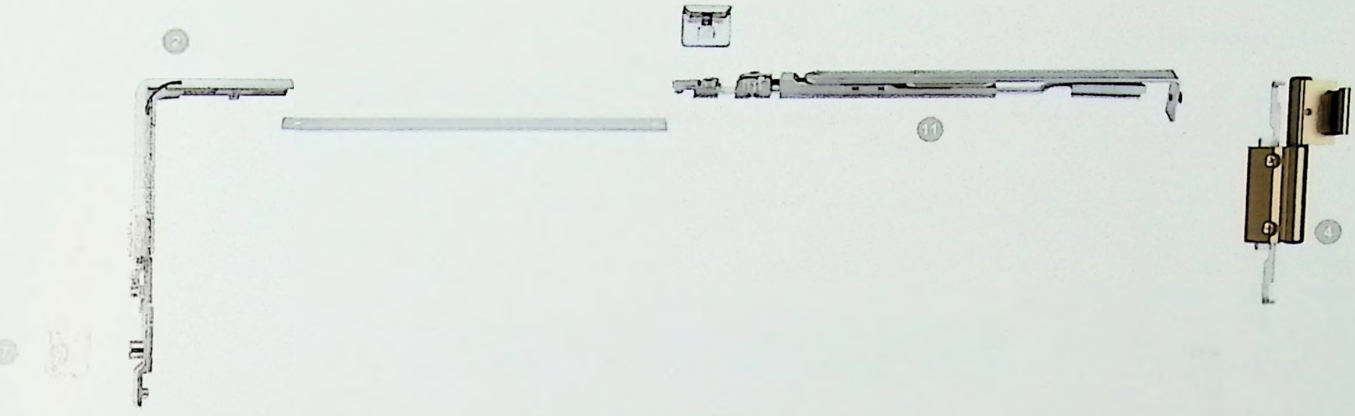


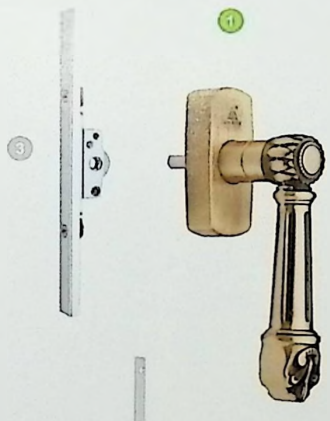
















内平开下悬五金件配置 / Tilting and turning sash opening inward hardware fitting /

01  JS-8036 内开执手 Swing-in handle	02  JS-LJ219 防误转角器H Error proofing diverter H	03  JS-SH1009 内倒15锁盒 Horizontal pivoting 15 lock box	04  JS-5748 上合页H Upper hinge H
05  JS-5749 调节下合页 Lower hinge	06  JS-LJ221 防脱器H Anti-desquamation machine H	07  JS-5007 锁扣 Lock fasteners	08  JS-LJ222 悬转支撑H Suspension support H
09  JS-LJ223 调节锁座H Regulated lock bracket H	10  JS-3039 伸缩风撑 Telescopic wind bracing	11  JS-LJ224 斜拉杆H Diagonal member H	

配置说明 / Allocation explanation /

1、以上执手有多款可供选择(85页-89页)；
2、内平开下悬组件必要时可配欧槽限位撑（JS-FC3039）以达到理想效果；
3、五金件不分左、右扇。

1. There are several kinds of handles for your choice (P85-P89);
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3039) for the best effect.
3. Hardware is not divided into left sash and right sash.

绿色标记为可供选择。
Green marking is available for choice

ANTI-THEFT QUICK INSTALLED HORIZONTAL PIVOTING WINDOW SERIES

防盗快装内开内倒系列 喷塑200/氧化220

中国专利号：201420180995.X / 201407691848



示意图 / Scheme of installation /

序号 NO.	配件名称 NAME		数量 QUANTITY
1	合页组件	Hinge assembly	2
2	合页组件	Hinge assembly	
2.1	转角器	Corner device	1
2.2	可调转换杆	Adjustable conversion rod	1
2.3	底部插销	Bottom latch	1
2.4	插销锁座	Latch lock seat	1
2.5	扇提升块	Sector lifting block	1
3	竖直连接杆	Vertical connection rod	2
4	锁座	Lock Bracket	1
5	安全锁座	Safety lock seat	3
6	倾转锁座	Tilting lock seat	1
7	执手	Bevel pull rod	1
8	斜拉杆	Handle	1
9	齿库	Gear bank	1
10	水平连接杆	Horizontal connection rod	1
11	伸缩风撑	Telescopic wind bracing	1

配置说明 / Allocation explanation /

1、以上执手有多款可供选择(30页-37页)；
2、内平开下悬组件必要时可配欧标限位撑（JS-FC3039）以达到理想效果；
3、五金件不分左、右扇。

1. There are several kinds of handles for your choice(P30-P37).
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3039) for the best effect.
3. Hardware is not divided into left sash and right sash.


扇重大于80kg时，需增配附加件13；
表格中所述的竖直连接杆3适用扇高的范围仅限于执手位于扇高的中心位置，执手位置不居中时，上下两端的竖直连接杆需单独配置。

注 绿色标记为可供选择。
Green marking is available for choice

HORIZONTAL PIVOTING WINDOW LATERAL SLIDING/HARDWARE SYSTEM

炫开内倒侧滑/五金系统 喷涂920/氧化950

中国专利号：201710207757.1

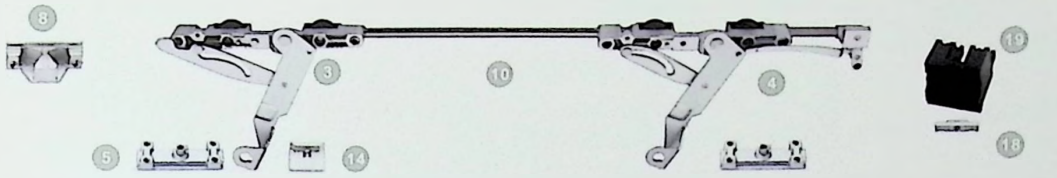


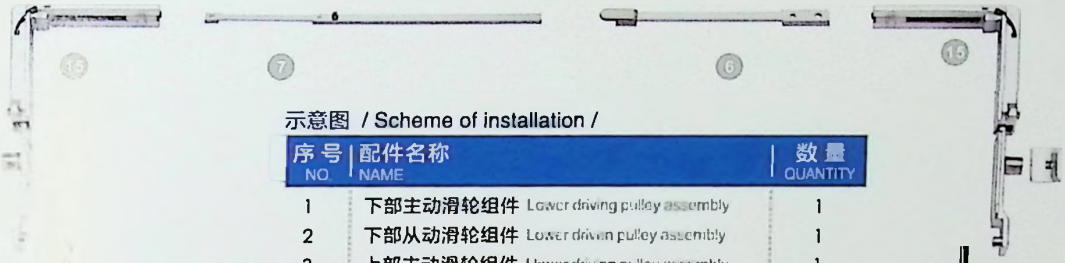


示意图 / Scheme of installation /

序号 NO.	配件名称 NAME		数量 QUANTITY
1	下部主动滑轮组件	Lower driving pulley assembly	1
2	下部从动滑轮组件	Lower driven pulley assembly	1
3	上部主动滑轮组件	Upper driving pulley assembly	1
4	上部从动滑轮组件	Upper driven pulley assembly	1
5	扇安装座	Sector installation seat	2
6	上部固定连杆	Upper fixed connection rod	1
7	上部可调连杆	Upper adjustable connection rod	1
8	上部定位座	Upper positioning seat	1
9	下部定位座	Lower positioning seat	1
10	滑轮架连接轴	Pulley rack connection shaft	2
11	扇角码组件	Sector corner assembly	2
12	轴固定片	Shaft fixing piece	1
13	半锁杆	Semi lock rod	2
14	锁座	Lock Bracket	6
15	转角器	Corner device	3
16	双向连接中件	Double-way middle connection part	1
17	底部传动条	Bottom driving bar	1
18	遮帘限位板	Blind limit board	2
19	遮帘垫块	Blind cushion block	2
20	执手	Handle	1
21	传动条1	Driving bar 1	2
22	传动条2	Driving bar 2	1



舒适多样的通风模式 Comfortable and diversified ventilation modes



上悬状态

Top hung ventilation status

通风换气柔和舒适
防雨、防尘、防盗

Soft and comfortable ventilation, rain proofing, dust proofing, anti-theft

平移状态

Translation status

通风量加大不占用室内空间不干涉窗帘

Increased ventilation rate without taking much floor space and without interfering with the curtain


推拉开启状态

Push-pull opening status

随意控制通风量避免碰
碰孩子头部危险


Free control of ventilation rate avoids the danger of collision with children's heads

水密性与气密性可达到7级以上
Water tightness and air tightness can reach class 7.

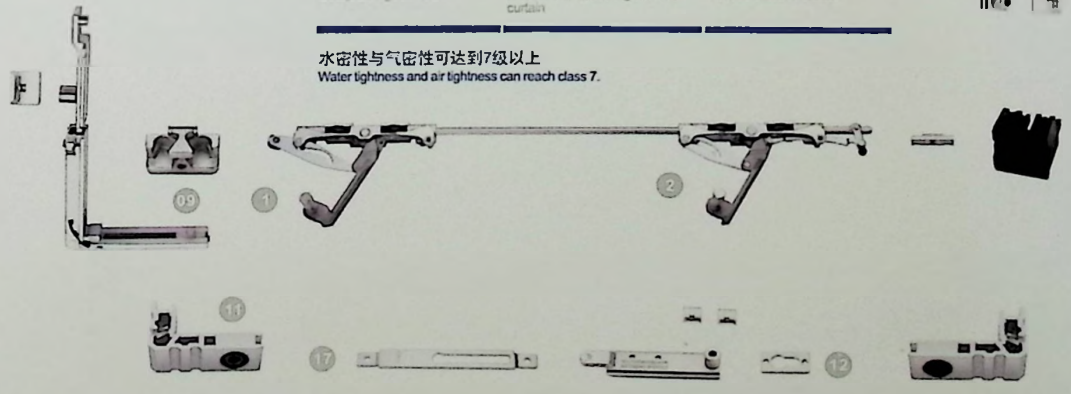

SCHEMATIC DIAGRAM FOR 20-GROOVED EXTERNAL AWAY DOWN WINDOW (PATENT PRODUCT)

JS-YD101 20槽外开外倒示意图(专利产品) 喷塑140/氧化160 . 第一代 First Generation .

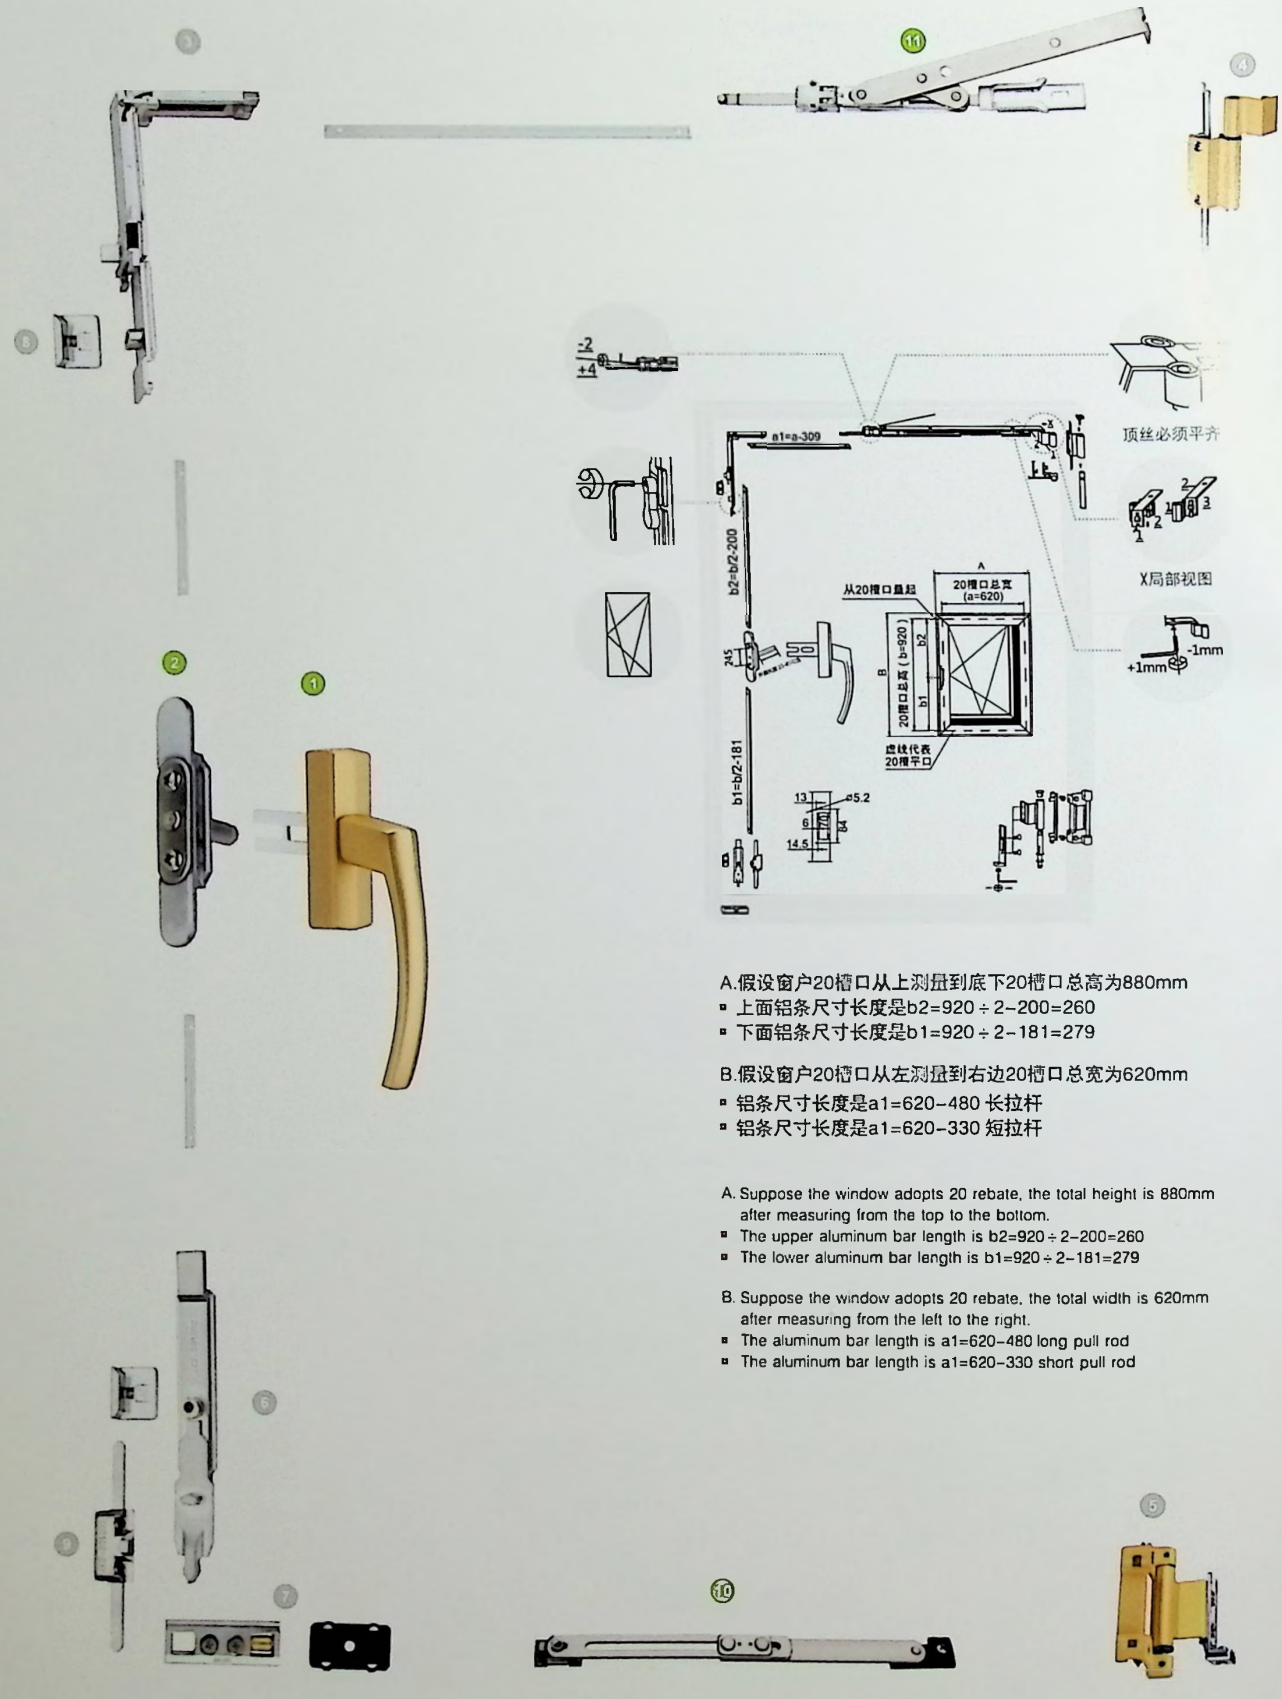

A.假设窗户20槽口从上测量到底下20槽口总高为880mm
- 上面铝条尺寸长度是b2=920÷2-200=260
- 下面铝条尺寸长度是b1=920÷2-181=279

B.假设窗户20槽口从左测量到右边20槽口总宽为620mm
- 铝条尺寸长度是a1=620-480 长拉杆
- 铝条尺寸长度是a1=620-330 短拉杆

A. Suppose the window adopts 20 rebate, the total height is 880mm after measuring from the top to the bottom.
- The upper aluminum bar length is b2=920÷2-200=260
- The lower aluminum bar length is b1=920÷2-181=279

B. Suppose the window adopts 20 rebate, the total width is 620mm after measuring from the left to the right.
- The aluminum bar length is a1=620-480 long pull rod
- The aluminum bar length is a1=620-330 short pull rod


外开外倒五金件配置 / Tilting and turning sash opening outward hardware fitting /

01



JS-817
外开执手
Handle

01




JS-25
外开执手
Handle

02




JS-2012
外开T钉中件
Outward opening T nail middle part

03




JS-218
转向器
Redirector

04




JS-5739
上合页
Upper hinge

05



JS-5740
下合页
Lower hinge

06




JS-201
悬转支撑
Suspension support

07



JS-231
调节锁座，助升块
Regulated lock bracket and rise-helping block

08




JS-5007
锁扣
Lock fasteners

09



JS-201202
防脱器
Anti-desquamation machine

10



JS-FC3039
伸缩风撑
Telescopic wind bracing

11




JS-212
斜拉杆（扇宽小于600mm）
Diagonal Member (sash width shall below 600mm)


执手可选配 / Selected Mating /




- JS-817



- JS-833



- JS-836



- JS-ZS831



- JS-ZS843

配置说明 / Allocation explanation /

1、以上执手有多款可供选择；
2、内平开下悬组件必要时可配欧槽限位撑（JS-FC3039）以达到理想效果；
3、五金件不分左、右扇。

1. There are several kinds of handles for your choice;
2. If necessary, swing-in lower suspension parts can be matched with European groove limit support (JS-FC3039) for the best effect;
3. Hardware is not divided into left sash and right sash.

绿色标记为可供选择。
Green marking is available for choice

BOTTOM-HUNG CASEMENT OPENING OUTWARDS HARDWARE (SHIFTING FORK TYPE)

JS-YD103 外开下悬五金件（拨叉式） 喷塑230/氧化250 . 第三代 Third Generation . (分左右 Left and right)



A.假设窗户20槽口从上测量到底下20槽口总高为920mm
- 侧上部铝条尺寸长度是b2=920÷2-200=260
- 侧下部铝条尺寸长度是b1=920÷2-195=265

B.假设窗户20槽口从左测量到右边20槽口总宽为620mm
- 铝条尺寸长度是a1=620-316=304

A. Suppose the window adopts 20 rebate, the total height is 920mm after measuring from the top to the bottom.
- The length of aluminum bar at the lateral top is b2=920÷2-200=260
- The length of aluminum bar at the lateral bottom is b1=920÷2-195=265

B. Suppose the window adopts 20 rebate, the total width is 620mm after measuring from the left to the right.
- The aluminum bar length is a1=620-316=304

执手分左、右/按又长短可选
适用欧标20槽


上面的偏芯销点可调节密封强调
安全多功能
可用于平开角度的大小
可调节扇左右搭接量

可用于防止窗户坠落
有长、短选择

注：当窗户往出去外悬时，必须用力拉到拉
杆弹簧的节点处，才不会反弹回来


外开下悬五金件配置 / Tilting and turning sash opening inward hardware fitting /

专利号：ZL201430478758.7

01

JS-836
执手
Handle


02

JS-2012
外开T钉中件
Outward opening T nail middle part

03

JS-204A
转角器
Corner device


04

JS-2108
防误器
Error preventer

05

JS-2110
支撑
support


06

JS-2109
定位座
Positioning seat

07

JS-223
垫块
Cushion block

08

JS-3039
伸缩风撑
Telescopic wind bracing

09

JS-5007
锁扣
Lock fasteners

10

JS-104
外开下悬上合页
Upper hinge of bottom-hung casement opening outwards

11

JS-103
外开下悬下合页
Lower hinge of bottom-hung casement opening outwards

12

JS-901
防坠落器
Safety anti-falling devices


13


JS-771
小拉手
Small handle


14


JS-217
下悬斜拉杆
Bottom-hung diagonal Member

执手可选配 / Selected Mating /


- JS-836


- JS-829


- JS-833


- JS-ZS831


- JS-ZS842

特点说明 / Allocation explanation /

断桥铝合金外开下悬窗，使用同一个执手可实现外平开和外下悬两种开启方式

1.执手向上时，窗扇处于上悬挂状态，防止骤然而至的雨水进入室内，同时又可以让室外的新鲜空气可以适量流入室内

2.执手水平时，窗扇可平开90°，此时用于大面积通风，迅速解决室内换气问题，外平开开启角度也是消防逃生的需要

3.执手向下时，窗扇四周均可被锁定锁闭，更好的保持隔音、防尘、防水的密封效果

注:

1.如果扇宽或扇高超过1200mm，推荐加装中间锁

2.在本系统中误操作保险为必配产品

3.所有传动零部件均需要涂润滑脂

For the bridge aluminum alloy bottom hung casement opening outwards, the two opening modes such as outward opening and outward lower suspension can be realized by using the same handle.

1. When the handle is upward, the casement is always under an upper suspension status to prevent rainwater from entering the room and let outdoor fresh air flow into the room at a proper amount.
2. When the handle is horizontal, the casement can be opened horizontally for 90°. At the time, it is used for large area ventilation to rapidly solve the problem of indoor ventilation. The outward opening angle is also a necessity for fire evacuation.
3. When the handle is downward, the cranes around the casement can be locked and closed to achieve a better sound insulation, dustproof and waterproof sealing effect.


Note:

1. If the casement width or height is more than 1200mm, it is recommended to additionally install the middle lock.
2. The misoperation security device in the system is a mandatory product.
3. All moving parts should be spread with lubricating grease.

绿色标记为可供选择。
Green marking is available for choice

BOTTOM-HUNG CASEMENT OPENING OUTWARDS HARDWARE (SQUARE SHAFT TYPE)

JS-YD104 外开下悬五金件（方轴式） 喷粉250/氧化270 . 第二代 Second Generation . (分左右 Left and right)

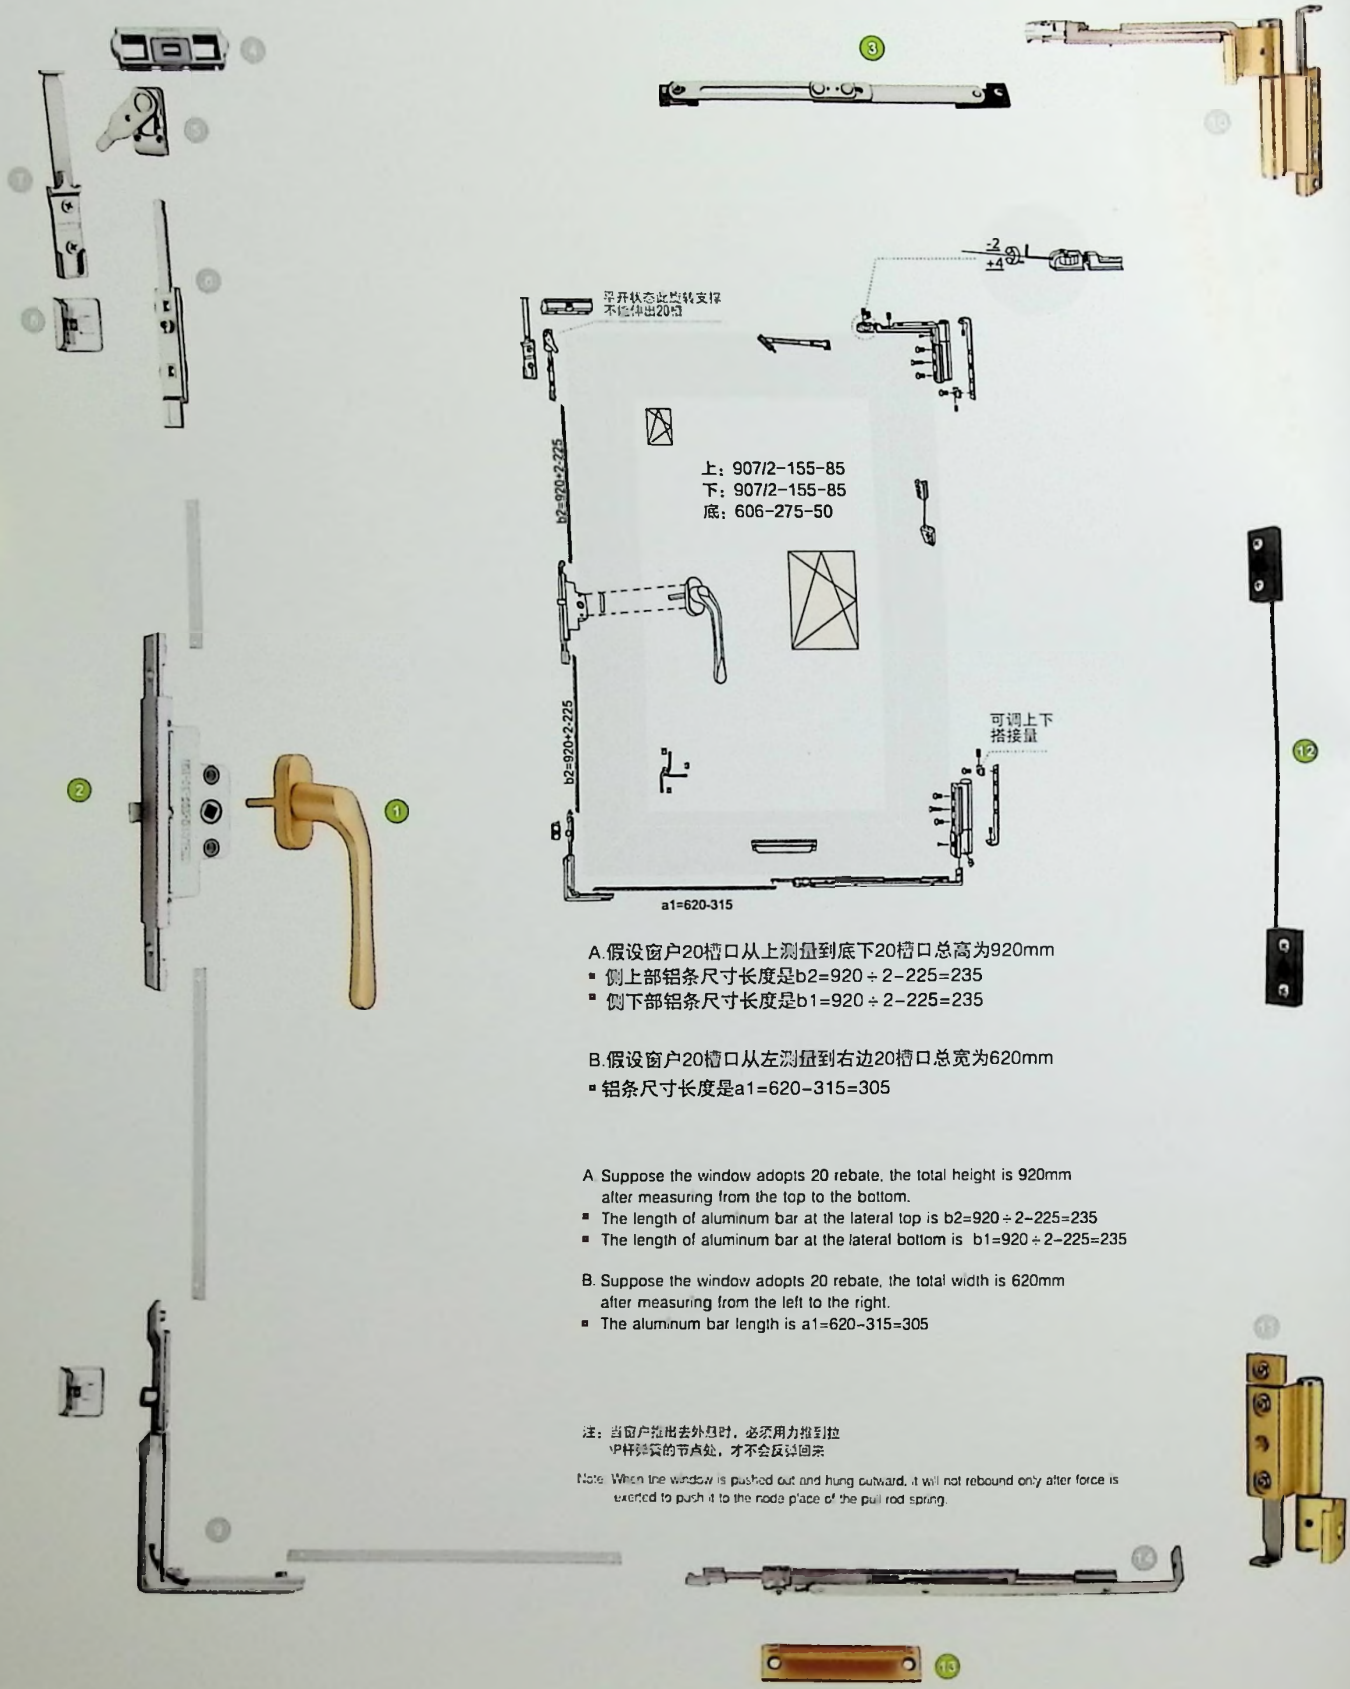

A.假设窗户20槽口从上测量到底下20槽口总高为920mm
- 侧上部铝条尺寸长度是b2=920÷2-225=235
- 侧下部铝条尺寸长度是b1=920÷2-225=235

B.假设窗户20槽口从左测量到右边20槽口总宽为620mm
- 铝条尺寸长度是a1=620-315=305


A. Suppose the window adopts 20 rebate, the total height is 920mm after measuring from the top to the bottom.
- The length of aluminum bar at the lateral top is b2=920÷2-225=235
- The length of aluminum bar at the lateral bottom is b1=920÷2-225=235

B. Suppose the window adopts 20 rebate, the total width is 620mm after measuring from the left to the right.
- The aluminum bar length is a1=620-315=305

注：当窗户推出去外悬时，必须用力推到拉杆弹簧的节点处，才不会反弹回来

Note: When the window is pushed out and hung outward, it will not rebound only after force is exerted to push it to the node place of the pull rod spring.

外开下悬五金件配置 / Tilting and turning sash opening inward hardware fitting /


01

JS-8030
执手
Handle


02

JS-25
锁盒(可选)
Lock body(optional)

02

JS-30
锁盒防误器
Error proofing machine

03

JS-3039
伸缩风撑(可选)
Telescopic wind bracing (optional)


04

JS-223
垫块
Cushion block

05

JS-2108
防误器
Error preventer


06

JS-2011D
旋转支撑
Rotary support

07

JS-2109
定位座
Positioning seat

08

JS-5007
锁扣
Buckle

09

JS-204A
转角
Diverter

10

JS-104
外开下悬上合页
Upper hinge of bottom-hung casement opening outwards

11

JS-103
外开下悬下合页
Lower hinge of bottom-hung casement opening outwards

12

JS-901
防坠落器
Safety anti-falling devices

13

JS-771
小拉手
Small handle

14

JS-217
下悬斜拉杆
Bottom-hung diagonal Member

执手可选配 / Selected Mating /


- JS-SG8017


- JS-SG8029


- JS-SG8030


- JS-SG8035


- JS-SG8038

特点说明 / Allocation explanation /

断桥铝合金外开下悬窗，使用同一个执手可实现外平开和外下悬两种开启方式

1.执手向上时，窗扇处于上悬挂状态，防止骤然而至的雨水进入室内，同时又可以让室外的新鲜空气可以适量流入室内
2.执手水平时，窗扇可平开90°，此时用于大面积通风，迅速解决室内换气问题，外平开开启角度也是消防逃生的需要
3.执手向下时，窗扇四周均可被锁定锁闭，更好的保持隔音、防尘、防水的密封效果

注:
1.如果扇宽或扇高超过1200mm，推荐加装中间锁
2.在本系统中误操作保险为必配产品
3.所有传动零部件均需要涂润滑脂

For the bridge aluminum alloy bottom hung casement opening outwards, the two opening modes such as outward opening and outward lower suspension can be realized by using the same handle.
1. When the handle is upward, the casement is always under an upper suspension status to prevent rainwater from entering the room and let outdoor fresh air flow into the room at a proper amount.
2. When the handle is horizontal, the casement can be opened horizontally for 90°. At the time, it is used for large area ventilation to rapidly solve the problem of indoor ventilation. The outward opening angle is also a necessity for fire evacuation.
3. When the handle is downward, the areas around the casement can be sealed and closed to achieve a better sound insulation, dustproof and waterproof sealing effect.

Note:
1. If the casement width or height is more than 1200mm, it is recommended to additionally install the middle lock.
2. The misoperation security device in this system is a mandatory product.
3. All driving parts should be spread with lubricating grease.


注 绿色标记为可供选择。
Green marking is available for choice

20mm Grooved Aluminum Alloy Flat Open Curtain Wall Series

JS-CK560 20mm槽铝合金平开幕墙系列/80

JS-CK560（上悬门窗带转角多点锁）
(Top suspension window with corner point lock)

序号 NO.	配件名称 NAME		配件编号 PART NO.	数量 QUANTITY
1	内平开执手	Swing-in handle	可选 Optional	1
2	连接中件	Middle connector	JS-LJ2007	1
3	连接件	Connector	JS-LJ2005	7
4	锁扣	Buckle	JS-SK5004	6
5	转向器	Redirector	JS-[illegible]4	2

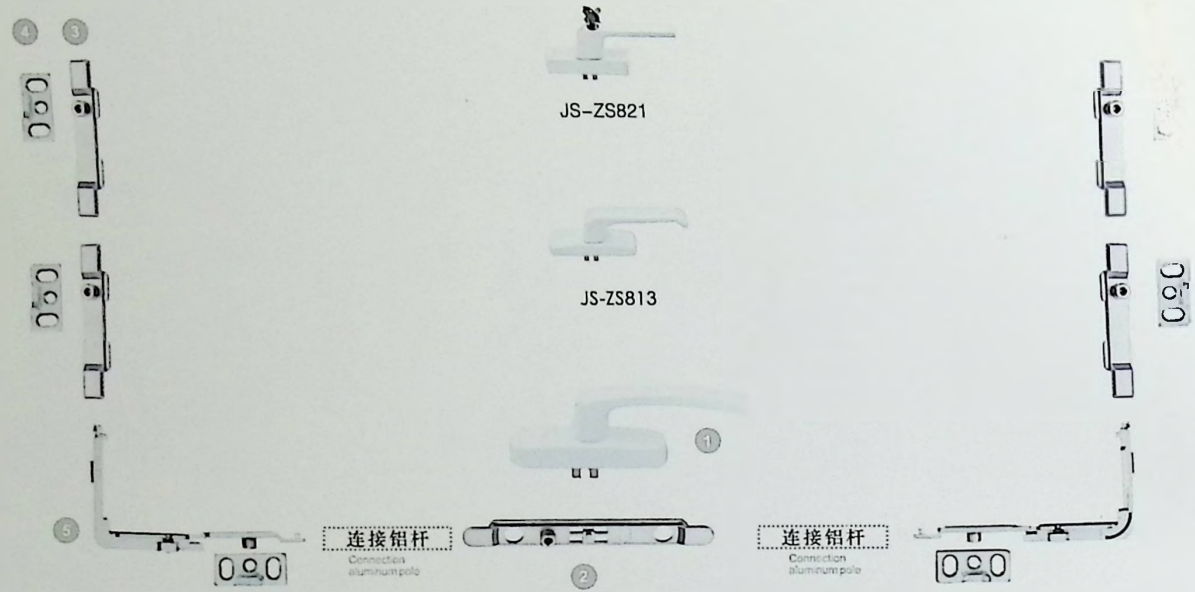


20mm Notch Curtain Wall Three-point Lock

JS-CK561 20mm槽口幕墙三点锁组件/70

JS-CK561（幕墙三点锁）
(Curtain three point lock)

序号 NO.	配件名称 NAME		配件编号 PART NO.	数量 QUANTITY
1	内平开执手	Swing-in handle	可选 Optional	1
2	连接中件	Middle connector	JS-LJ2007	1
3	连接件	Connector	JS-LJ2005	2
4	锁扣	Buckle	JS-SK5004	3
5	上悬四连杆	Top hung four connection rods	JS-HC3034	2

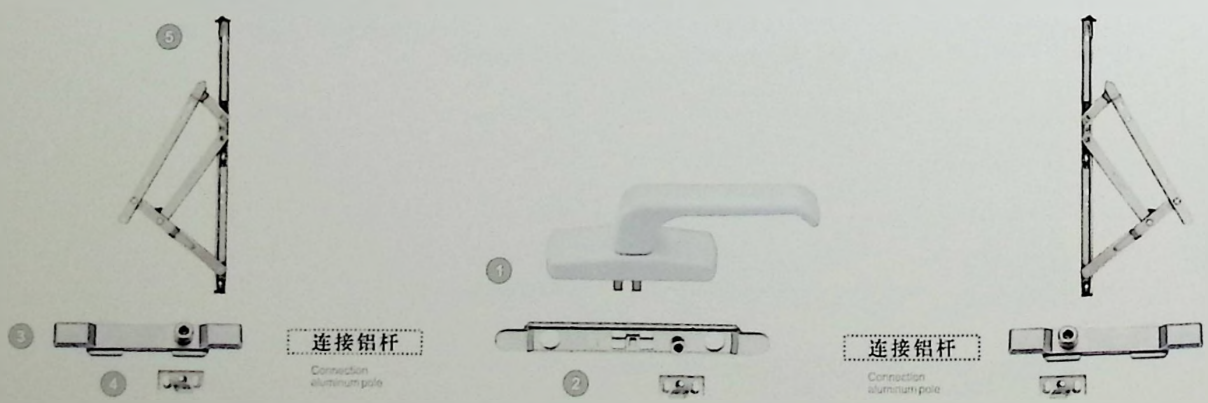



平开上悬安装示意图
Scheme of installation of side-hung upper suspension

序号 NO.	配件名称 NAME		数量 QUANTITY
1	上部转向器	Top steering angle	1
2	下部转向器	Bottom steering angle	1
3	传动器7.5mm	Driving rod 7.5mm	1
3A	传动器14.5mm	Driving rod 14.5mm	1
4	中间锁转向角(可选件) Middle lock steering angle (optional)		11
4B	中间锁延长杆(可选件) Middle lock lengthened rod (optional)		1
5	导向杆	Guide rod	1
6	斜拉杆(分左右) Diagonal member (left and right)		1
7	上轴承座	Upper bearing block	1
8	下轴承座	Lower bearing block	1
9	下转轴	Lower shaft	1
9A	下铰链(分左右) Upper shaft axis pin (left and right)		1
10	上转轴销轴	Upper shaft axis pin	1
11	防误操作器	Error proofing machine	1
12	提起器	Lifting machine	2-5
13	锁扣	Buckle	1
14	倾转锁座	Tilt lock seat	1
15	执手(可选各式执手) Handle (various types are available)		1

注：为了保证安装质量快捷请按照零件序号的先后安装，安装3、4时应根据窗扇的高和宽截断齿端至合适的尺寸，可选件可根据需要选择使用，需另购。

Note : In order to ensure the installation quality, please install in sequence. You shall cut the gear end to the suitable size according to the height and width of window sash while install during step 3 and 4. If you need to use ,you shall pay for it.

注 绿色标记为可供选择。
Green marking is available for choice

ALUMINUM WOOD TILTING AND TURNING SASH OPENING INWARD 13 SERIES

铝木内平开内倒13系列 [illegible]140/[illegible]230



示意图 / Scheme of installation /

序号 NO.	配件名称 NAME		数量 QUANTITY
1	上部转向器	Top steering angle	1
2	下部转向器	Bottom steering angle	1
3A	传动器14.5mm	Driving rod 14.5mm	1
5	导向杆	Guide rod	1
6	斜拉杆(分左右) Diagonal member (left and right)		1
7	上轴承座	Upper bearing block	1
8	下轴承座	Lower bearing block	1
9	下转轴	Lower shaft	1
9A	下铰链(分左右) Upper shaft axis pin (left and right)		1
10	上转轴销轴	Upper shaft axis pin	1
11	防误操作器	Error proofing machine	1
12	提起器	Lifting machine	2-5
13	锁扣	Buckle	2
14	翻转锁扣	Overturn buckle	1
15	执手(可选各式执手) Handle (various types are available)		1

注 绿色标记为可供选择。
Green marking is available for choice

组合五金件 / hardware fitting /

01




JS-1
上部转向角
Top steering angle

02



JS-2
下部转向角
Bottom steering angle


06



JS-6
斜拉杆(250)
Diagonal member


JS-6A
斜拉杆(350)
Diagonal member

07



JS-7
上轴承座
Upper bearing block

08



JS-8
下轴承座
Lower bearing block

09



JS-9A
下铰链
Lower clamp

10



JS-10
上转轴销轴
Upper shaft axis pin

11



JS-11
防误操作器
Error proofing machine

12



JS-12
提起器
Lifting machine

13




JS-13
锁扣
Buckle

14



JS-14
翻转锁扣
Overturn buckle

15



JS-SG8037
波兰执手
Handle

03A



JS-3B
传动杆14.5
Driving rod 14.5

05



JS-5-2
导向杆
Guide rod

注：为了保证安装质量快捷请按照零件序号的先后安装，安装3、4时应根据窗扇的高和宽裁断齿端至合适的尺寸，可选件可根据需要选择使用，需另购。

Note : In order to ensure the installation quality, please install in sequence. You shall cut the gear end to the suitable size according to the height and width of window sash while install during step 3 and 4. If you need to use, you shall pay for it.


执手可选配 / Selected Mating /




- JS-SG8037



- JS-SG8036



- JS-SG8040



- JS-SG8016




- JS-SG8039


HARDWARE
HANDLE SERIES
执手系列




JS-ZS801
方座执手(内开)
Square seat handle (internal open) /15

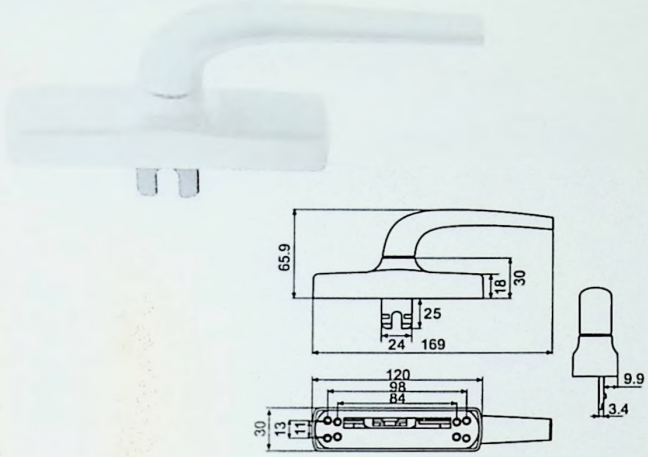


JS-ZS8011
方座执手(双向)
Square seat handle (two -way) /17

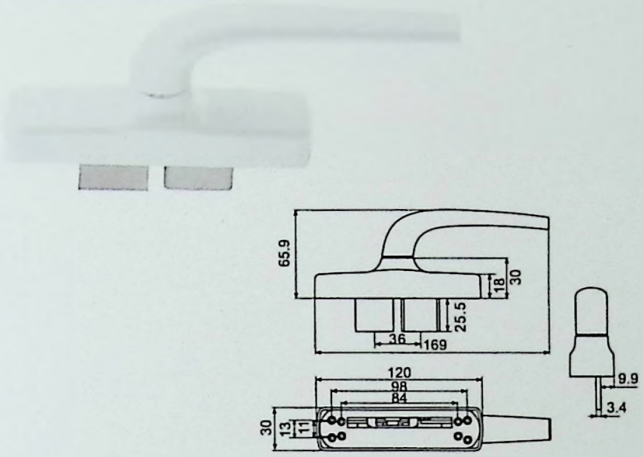


JS-ZS8022
直柄执手(双向)
Straight handle (two -way) /17.5

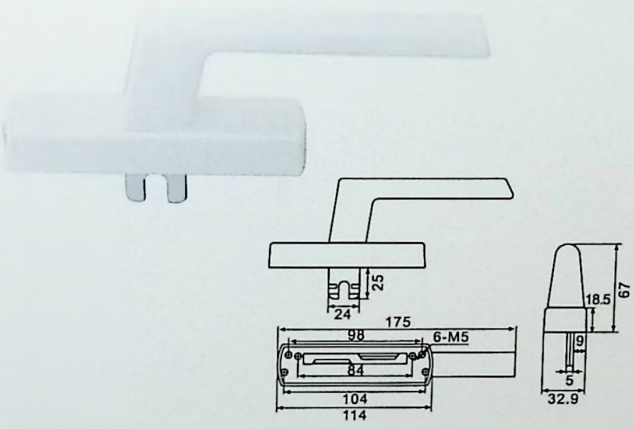


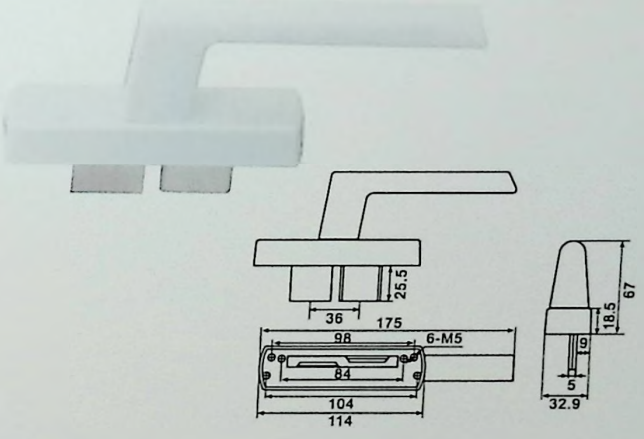


JS-ZS803
弧形执手(内开)
Arc handle (internal open) /16

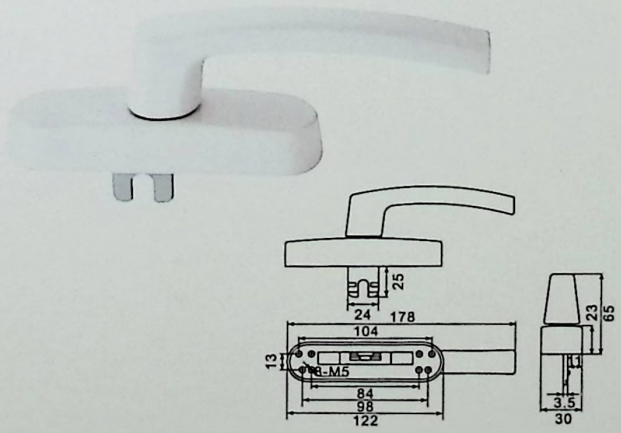


JS-ZS8033
弧形执手(双向)
Arc handle(two -way) /17.5

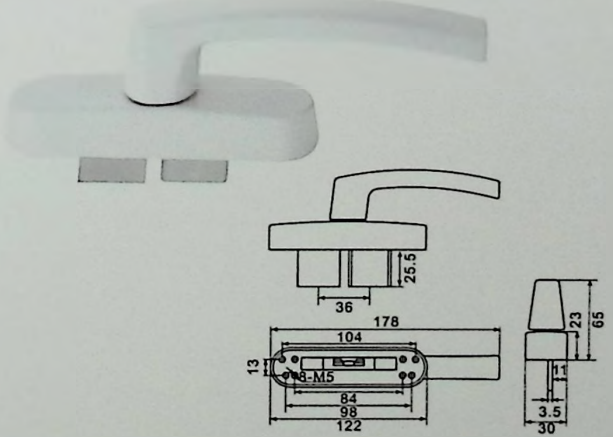


JS-ZS804
加重执手(内开)
Weighted handle (internal open) /16

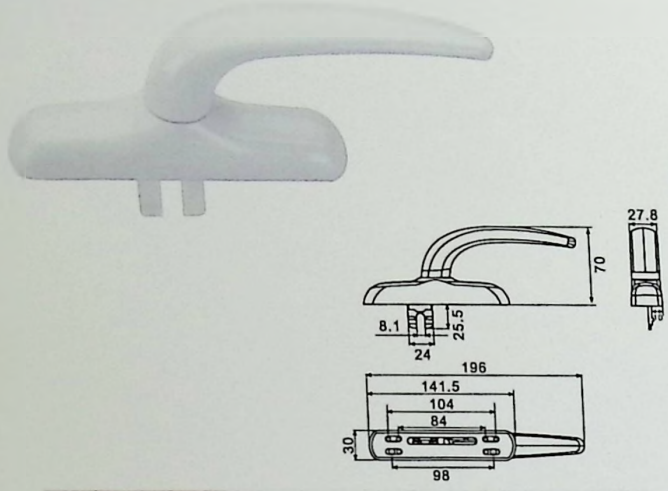


JS-ZS805
圆柄执手(内开)
Circle handle (internal open) /15

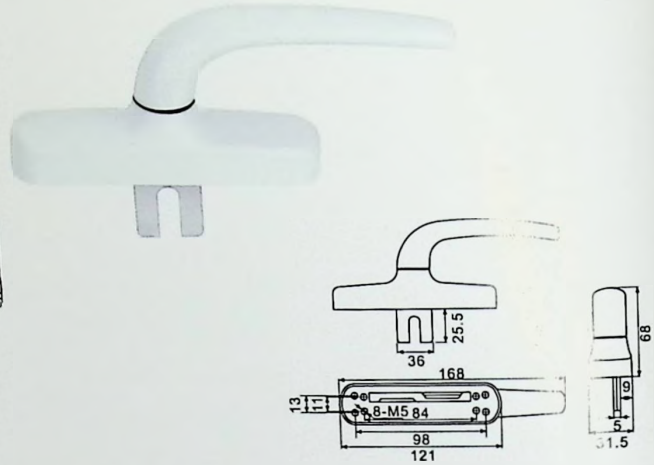

JS-ZS806
欧式执手(内开)
European style handle (internal open) /16

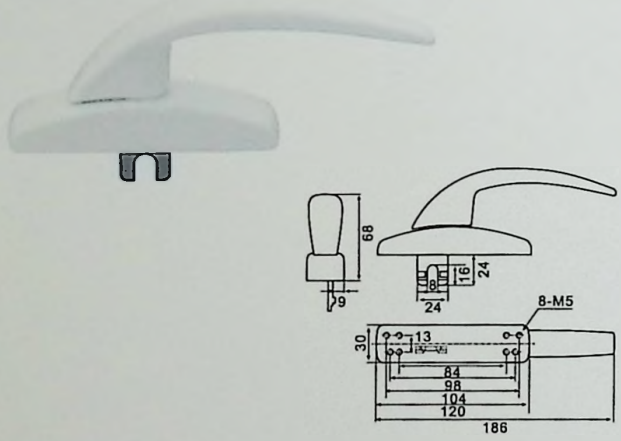


JS-ZS807
圆柄执手(外开)
Circle handle (external open) /16

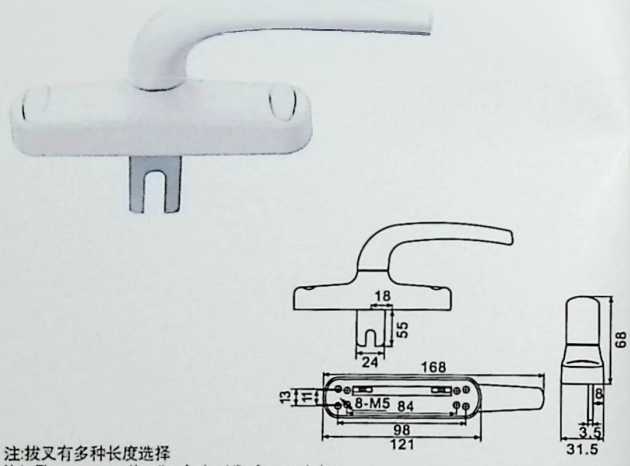


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS808
小二点小座执手
Second point small seat handle /11

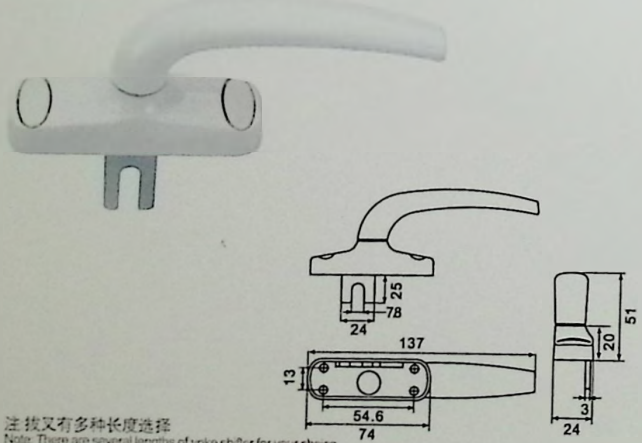


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS809
方座执手(外开)
Square seat handle (external open) /16

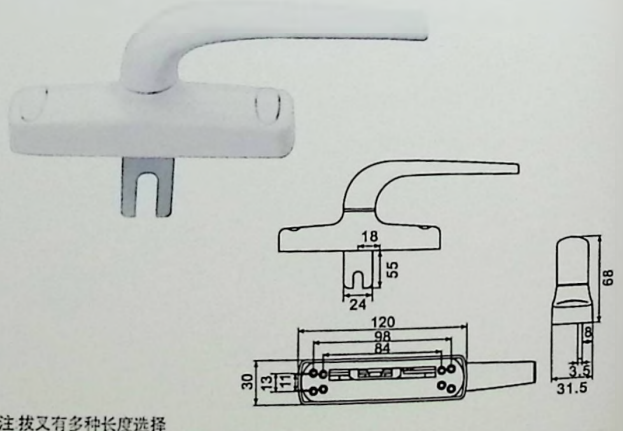


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS810
内外开执手(外开)
Internal & external opening handle (external open) /15

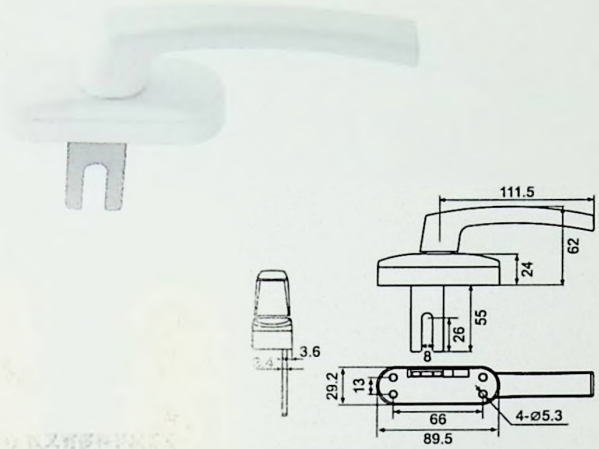

注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS812
中二点执手(外开)
Middle two-point handle (external open) /13.5

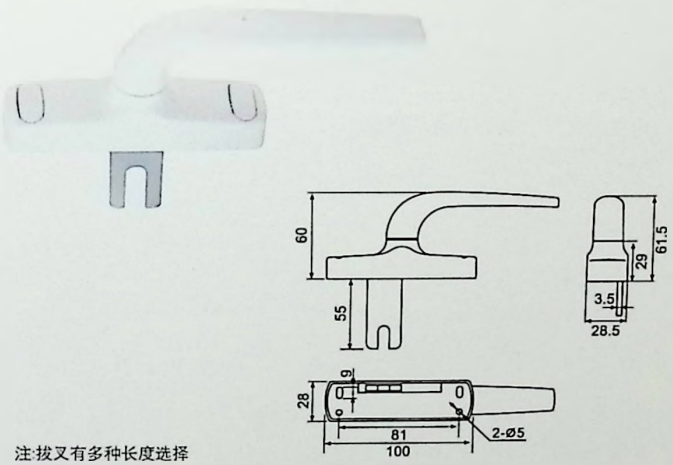


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS814
57外开执手(不分左右)
57 swing-out handle (no left and right) /12




注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS811
小二点大座执手
Second point big seat handle /12

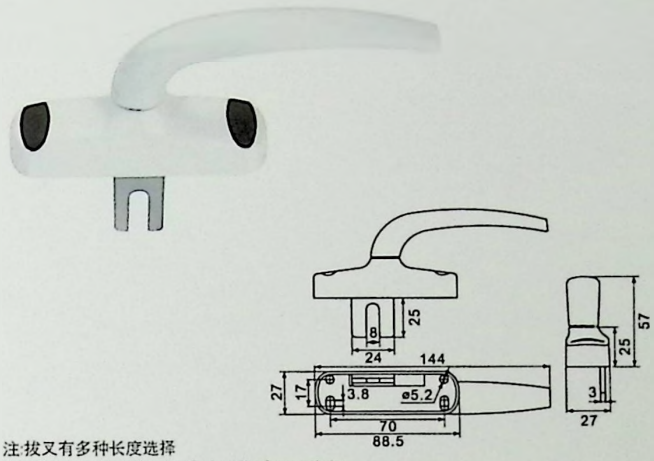


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS813
弓形执手(内开)
Arch handle (internal open) /16

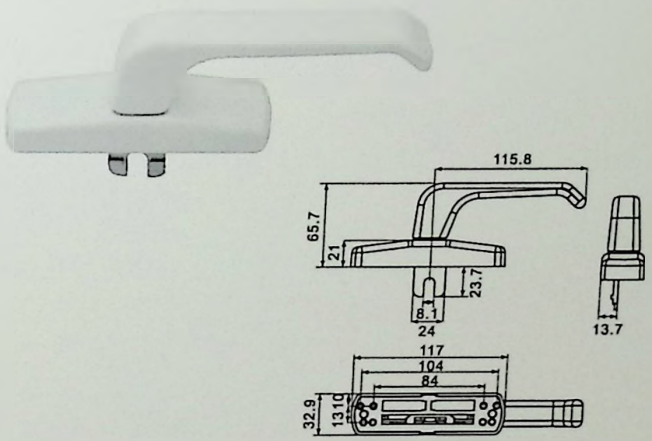

JS-ZS815
A款直柄执手(外开)
A straight handle (external open) /24

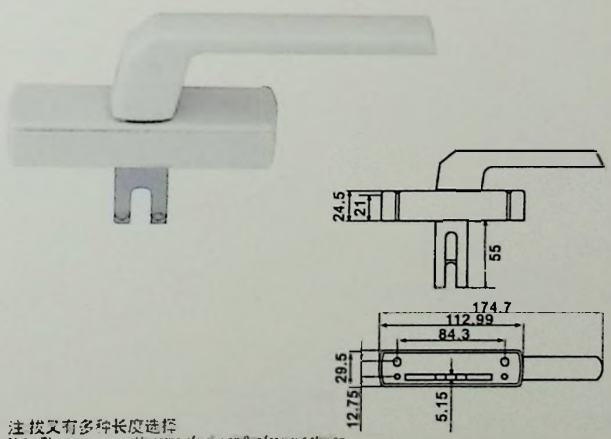


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS816
德式执手(内开)
Germany style handle (internal open) /16




注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS837
美克执手(内开)
Mech handle (opening inward) /17

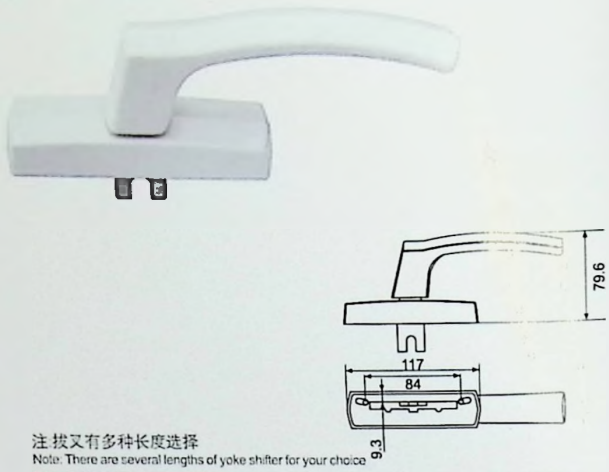


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS818
法式执手(内开)
French style handle (internal open) /15

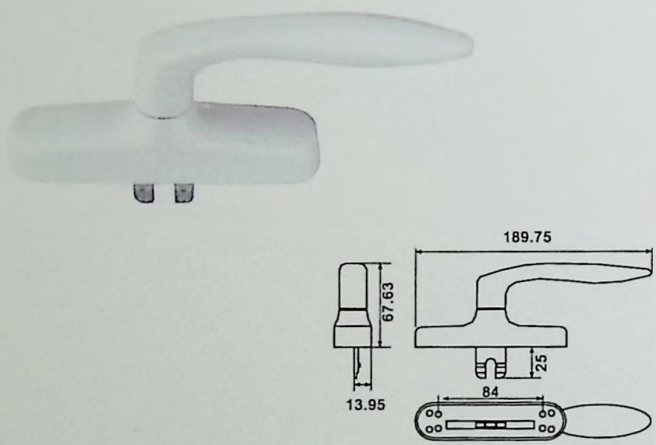


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS819
法式执手(外开)
French style handle (external open) /16

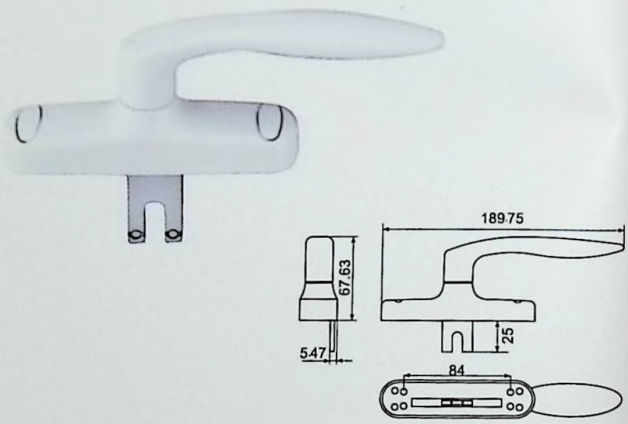


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS820
美式执手(内开)
American style handle (internal open) /16

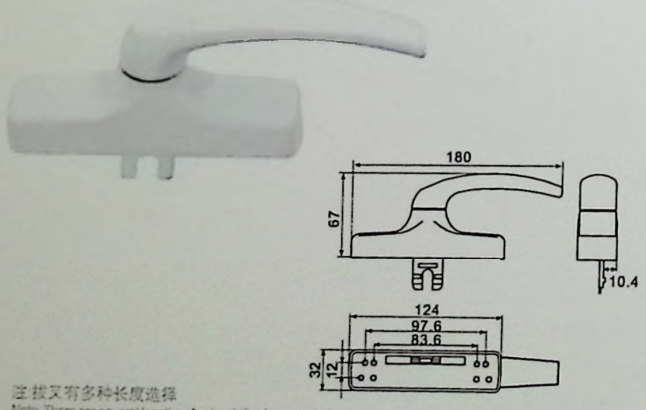


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS821
专利产品 PATENT PRODUCT
带锁直柄执手(内外开)
Straight handle with lock (internal external open) /33

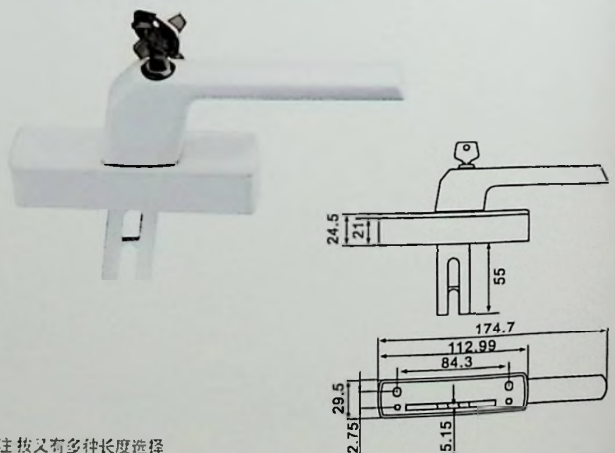

注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS823
美的大把执手(内开)
Media big handle (internal open) /16

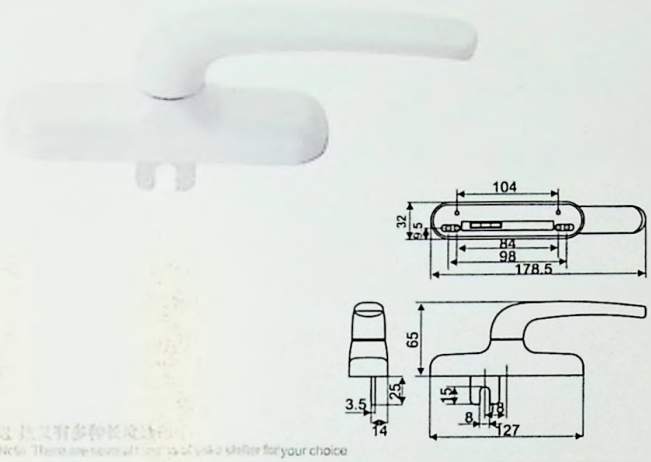


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS824
通用执手(外开)
Universal handle (external open) 锁11/锋13.5



注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice


JS-ZS825
大柄执手(内开)
Large handle (internal open) /16

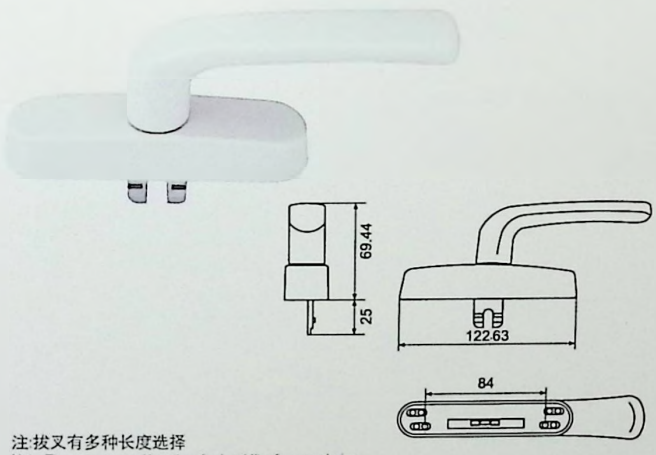

注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice


JS-ZS826
保险直柄执手(内外开)
Insurance straight handle (Internal external open) /32

专利产品
PATENT PRODUCT

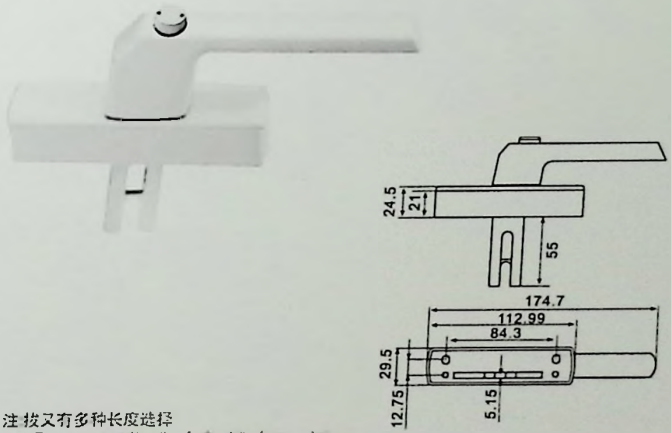


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS839
弧形执手带锁(内外开)
Arc handle with lock (Internal external open) /25

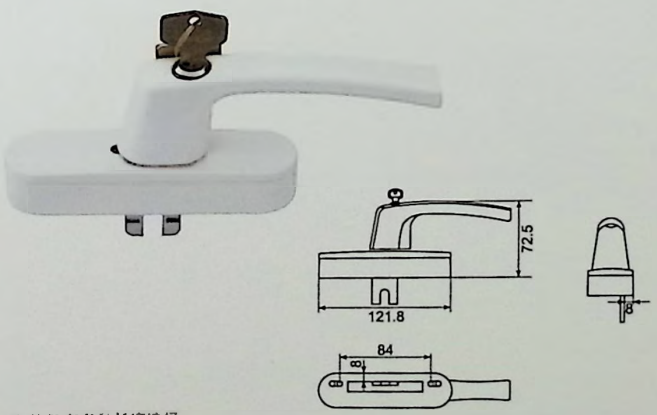

注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice


JS-ZS843
弧形外开执手(旋盖)
Arc outward opening handle (rotary cover) /18

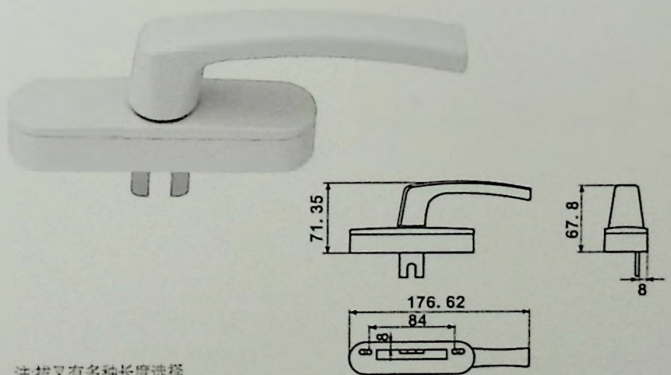

注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice


JS-ZS836
德式弯执手(分左右)
German style bent handle (including left and right parts) 喷塑17/喷漆22

专利产品 PATENT PRODUCT

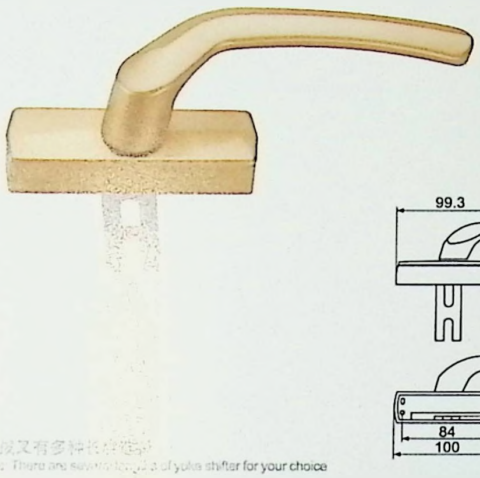


注:拔又有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS838
瑞士执手(提盖)
Swiss handle (lifting cover) /15

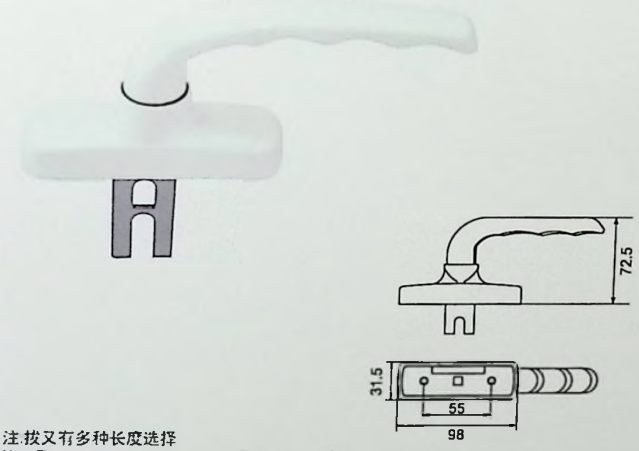

注:拔又有多种长度选择
Note: There are several lengths of yoke shifter for your choice


JS-ZS842
瑞典执手(提盖)
Swedish handle (lifted cover) /16

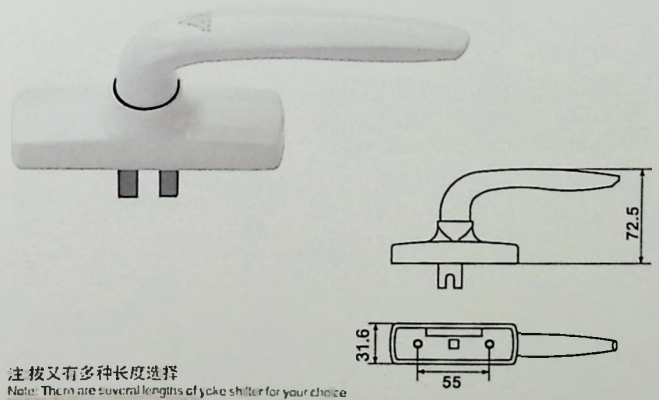

注:拔又有多种长度选择
Note: There are several lengths of yoke shifter for your choice


JS-ZS817
德式执手(外开)
German style handle (external open) 喷塑17/氧化30

专利产品 PATENT PRODUCT

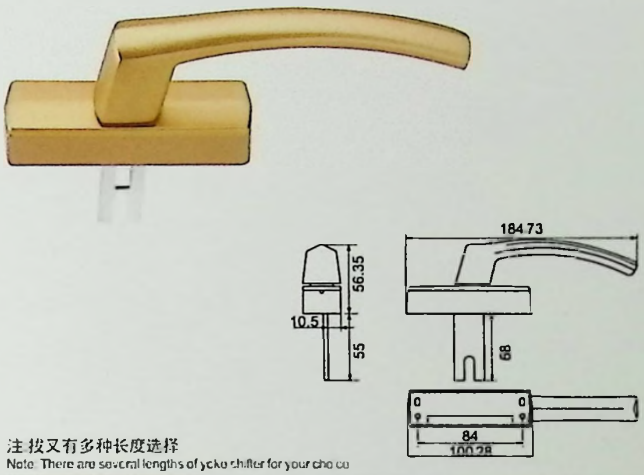


注:拔又有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS828
博美执手
Bomei handle /氧化36

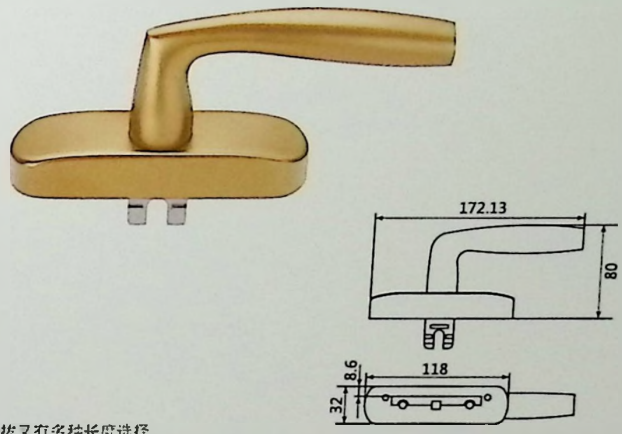


注:拔又有多种长度选择
Note: There are several lengths of yoke shifter for your choice


JS-ZS829
博士执手(内外开)
Bosch handle (internal external open) 喷塑20/氧化36

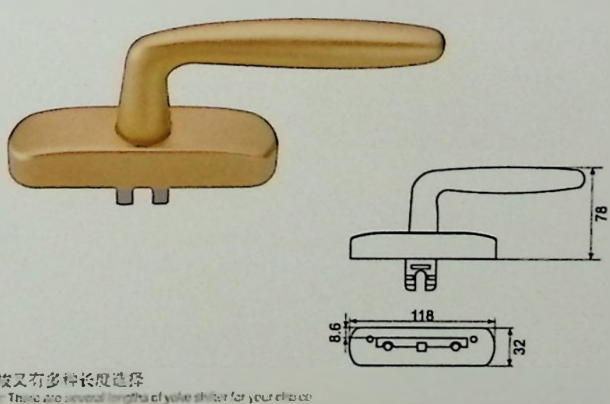

注:拔又有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS844
欧尚执手
Oushang handle /15

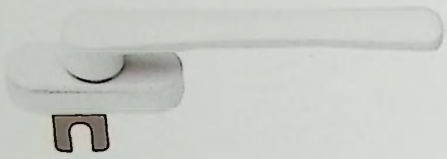




注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS845
欧尚歪把执手(分左右)
Oushang oblique handle (including left and right parts) /16






注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice


JS-ZS846
豪华执手
Luxurious handle /16






注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice


JS-ZS847
奔驰执手(内开)
Benz handle (internal open) /顶型20

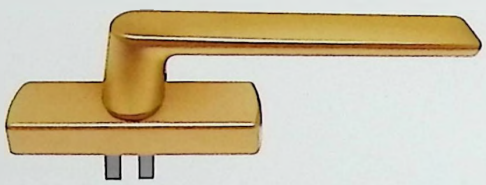




注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS840
中式执手(内开)
Chinese style handle (internal open) 锌/古铜50

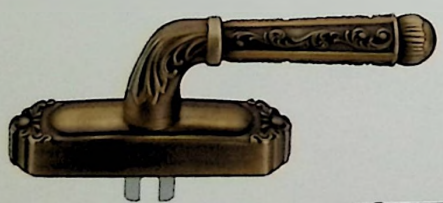


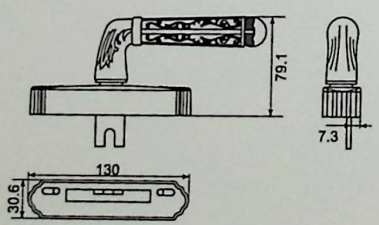


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice

JS-ZS841
英式执手(内开)
British style handle (internal open) 锌/古铜55

专利产品
PATENT PRODUCT

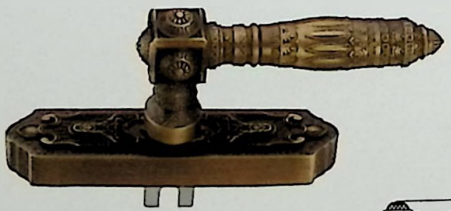

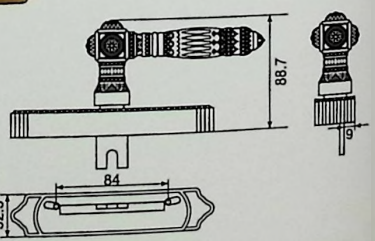


注:拔叉有多种长度选择
Note: There are several lengths of yoke shifter for your choice


JS-CK561

微通风安全锁30

Slight ventilation safety lock /25


专利产品
PATENT PRODUCT

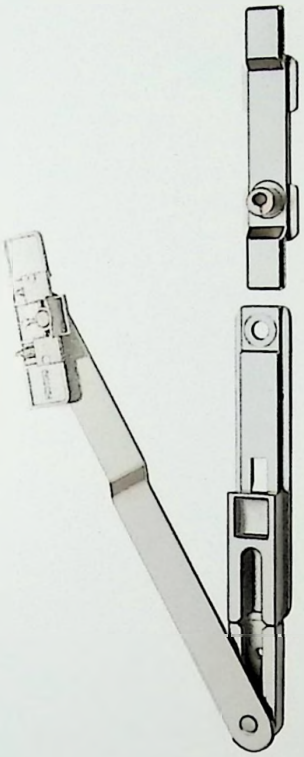

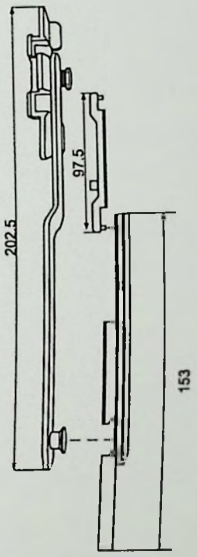


JS-BC001

不靠边 Non side-step /4




JS-BC002

靠边 Side-step /4




JS-BC003

加强大拔叉 Substantial shift lock /6




JS-BC004

不靠边 non side-step /4




JS-BC005

靠边 Side-step /5




JS-BC008

靠边 side-step /5




JS-BC009

带点 With point /3




JS-BC011

小齿 Small teeth /6




JS-BC012

大齿 Big teeth /6




JS-BC013

不带点 Non with point /3



JS-BC015


不靠边 non side-step /4




ALUMINUM ALLOY CONNECTOR SERIES

组合连接件系列


JS-DK2016
边连接件
Edge connection part /2







JS-LJ2002
边连接件(A)
Edge connection part(A) /2






JS-LJ2003
防盗边连接件
Anti-theft edge connection part /2







JS-LJ2014
移动锁点
Active latching point /0.9






JS-LJ2005
多点连接件
Multi-point connection part /2.5







JS-LJ2008
天地边件
Edge part /2.5







JS-LJ2006
中长条
Middle long bar /3







JS-LJ2007
幕墙中连接件
Curtain middle connection part /3







JS-LJ2015
不锈钢边件
Stainless steel edge part /3





JS-LJ2016
不锈钢锁扣
Stainless steel lock catch /1.5






JS-SK5019

20调节锁扣

20 adjustable lock catch /3






JS-SK5020

23调节锁扣

23 adjustable lock catch /4






JS-SK5001

01锁扣(高度：8mm)

Buckle /1.3




JS-SK5007

07锁扣 (高度：8/11mm)

Buckle /1.3







JS-SK5002

02锁扣

Buckle /1.2






JS-SK5003

03锁扣 (高度：8/13/16mm)

Buckle /1.2







JS-SK5004

幕墙锁扣

Curtain lock catch /1.4







JS-SK5011

不锈钢U型扣

Stainless steel U buckle /1







JS-SK5018

双开锁扣A

Double opening lock catch A /1.5






JS-SK5017

双开锁扣B

Double opening lock catch B /1.5







JS-SK5005

塑钢扣

Plastic steel buckle /1







JS-SK5006

塑钢扣

Plastic steel buckle /1







ALUMINUM ALLOY CONNECTOR SERIES

组合连接件系列


JS-201203
长连接中件
Long connection middle parts /5







JS-LJ2010
双向连接中件
Double-way middle connection part /3.5






JS-LJ2011
外开中插坑件
Outward opening middle insertion part /3.5







JS-LJ2012
外开T钉中件
Outward opening T nail middle part /3.5






JS-SK5016
JS-10
U形扣
Buckle /1.5






JS-SK5015
JS-11
T形扣
T buckle /1.5







JS-SK5017
全景钩
Panoramic hook /2






JS-SK5018
全景扣
Panoramic buckle /2







JS-SK5010
A20调节锁扣
A20 adjustable lock catch /4






JS-SK5012
防盗锁扣
Anti-theft lock catch /3







JS-LJ2004
内开中连接件
Inward opening middle connection part /2






JS-LJ2009
内开插坑中件
Inward opening middle insertion part /2






JS-DK2021
铝木助升器
Aluminum-wood lifting booster /6







JS-SK5020
欧标铝木锁扣
European standard aluminum-wood lock catch /1.5







JS-SK5022
中间锁紧扣
Middle fastening buckle /6






JS-SK5021
样角扣
Corner buckle /7







JS-DK223
滚轮助升器
Roller lifting booster /6







JS-DK2018
调节助升器
Regulated mini-lifting block /6






JS-DK2017
助升器(锌合金)
Assisting ascend block (zinc alloy) /3.5





JS-DK2015
助升块(塑料)
Assisting ascend block (plastic) /0.5







ALUMINUM ALLOY INTERNAL & EXTERNAL ENERGY SAVING VENTILATION SYSTEM

专利产品 PATENT PRODUCT

铝合金内外开节能微通风系统 /喷塑115







JS-CK561 20槽微通风系统
20 grooved micro ventilation system

NEW 新款推荐


序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	内平开执手	Swing-in handle	JS-816B	1
2	微通风拉杆	Micro ventilation rod	JS-3039A	1
3	上连接边件	Upper connection sidepiece	JS-2005	2
4	锁扣	Buckle	JS-5001	2
5	助升器	Rise-helping block	JS-2016	1
6	助升块	Rise-helping block	JS-2017	1
7	通风安全锁	Ventilation safety lock	JS-3039B	1
8	连接中件	Connection middle parts	JS-2004	1
9	支撑杆调节	Supporting rod adjustment	JS-YX181	1
10	不锈钢支撑杆	Stainless steel supporting rod	JS-YX182	1
11	180隐形铰链	180 invisible hinge	JS-YX180	1









可选配 / Selected Mating

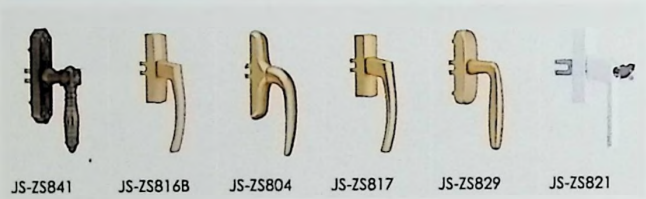

JS-ZS841 JS-ZS816B JS-ZS804 JS-ZS817 JS-ZS829 JS-ZS821



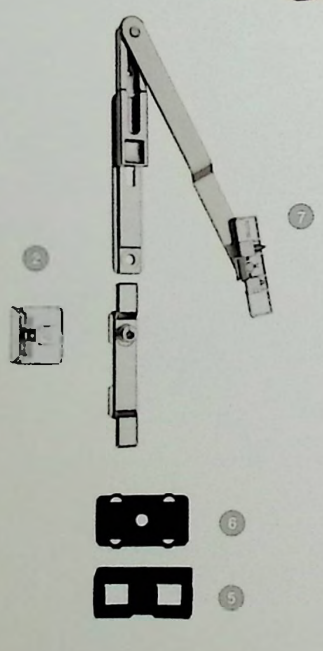

安全内外开节能微通风系统
Safety internal & external energy saving micro ventilation system


功能描述 Function Description
执手0°时，窗户处于锁闭状态
执手90°时，窗户处于微通用状态
执手180°时，窗户处于完全开启；
Handle at 0°, the window is on locking state
Handle at 90°, the window is on micro universal state
Handle at 180°, the window is on complete open state


带有安全保险锁功能
With function of safety insurance lock

安装描述 Installation Description
执手90°时将两颗固定螺丝拧紧，再拨到平开状态，进行微通用系统组件的调节即可。
Fasten two fixed screw while the handle is at 90°, then turn to flat open, adopts micro universal system to adjust the assembly.

注 绿色标记为可供选择。
Green marking is available for choice



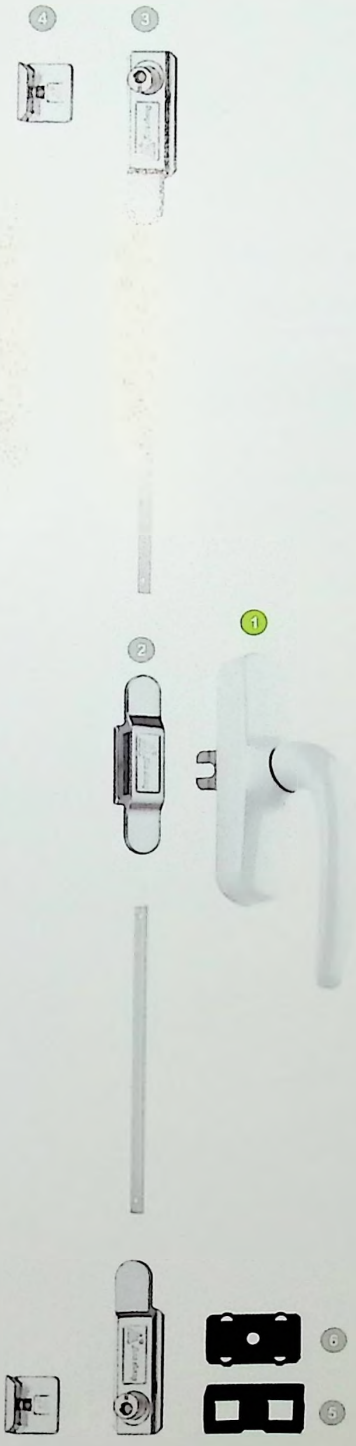





JS-CK562 20槽二点锁(内开)

20 grooved two-point lock


序号 NO.	配件名称 NAME	配件编号 PART NO.	数量 QUANTITY
1	内平开执手 Swing-in handle	JS-805	1
2	连接中件 Connection middle parts	JS-2004	1
3	连接边件 Connection side parts	JS-2001	2
4	锁扣 Buckle	JS-5007	2
5	助升器 Rise-helping block	JS-2016	1
6	助升块 Rise-helping block	JS-2017	1
7	合页 Hinge	JS-5717	2
8	二连杆(风撑) 2 links bar(wind bracing)	JS-3035	1


可选配 / Selected Mating

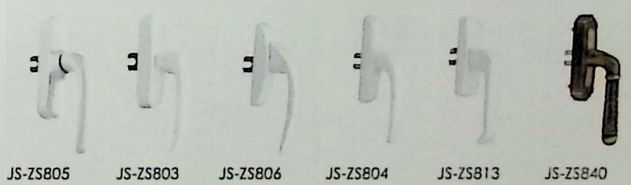




注 绿色标记为可供选择。
Green marking is available for choice








ALUMINUM ALLOY INNER OPEN TWO LOCK SERIES

铝合金内开两点锁系列 /喷塑47





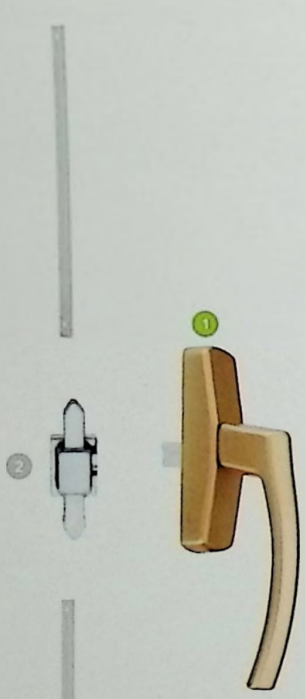

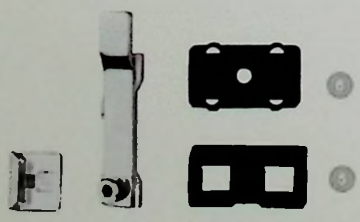

JS-CK563　20槽插坑式二点锁(内开)


20 grooved inserting two-point lock (internal open)

序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	内平开执手	Swing-in handle	JS-816	1
2	连接中件	Connection middle parts	JS-2009	1
3	连接边件	Connection side parts	JS-2002	2
4	锁扣	Buckle	JS-5007	2
5	助升器	Rise-helping block	JS-2016	1
6	助升块	Rise-helping block	JS-2017	1
7	合页	Hinge	JS-5721	2
8	二连杆(风撑)	2 links bar (wind bracing)	JS-3035	1


可选配 / Selected Mating





JS-ZS816　JS-ZS801C　JS-ZS805C　JS-ZS820C　JS-ZS821C　JS-ZS839



绿色标记为可供选择。
Green marking is available for choice





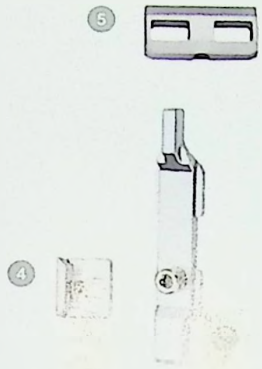





JS-CK565　20槽两点天地锁(上下插销式)


20 grooved two point lock (upper & down pin)

序号 NO	配件名称 NAME		配件编号 PART NO.	数量 QUANTITY
1	内平开执手	Swing-in handle	JS-8411	1
2	连接中件	Connection middle parts	JS-2010	1
3	连接边件	Connection side parts	JS-2008	2
4	锁扣	Buckle	JS-5007	2
5	助升块(锌合金) Assisting ascend block (zinc alloy)		JS-209	2
6	合页	Hinge	JS-5707	2
7	欧式风撑	European style wind bracing	JS-3036	1

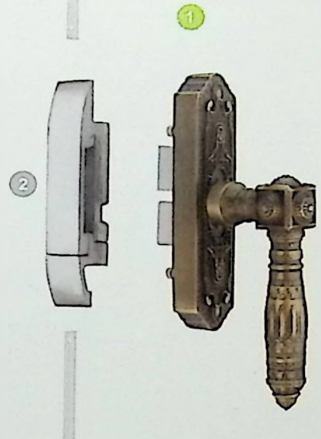


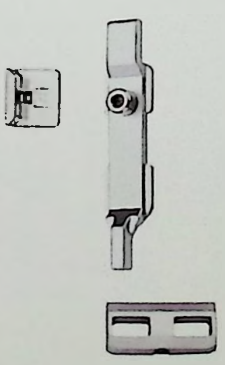


可选配 / Selected Mating

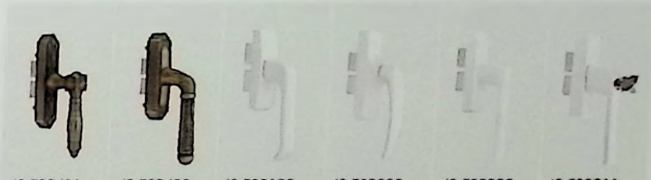


JS-ZS8411　JS-ZS8400　JS-ZS8133　JS-ZS8200　JS-ZS8022　JS-ZS8211

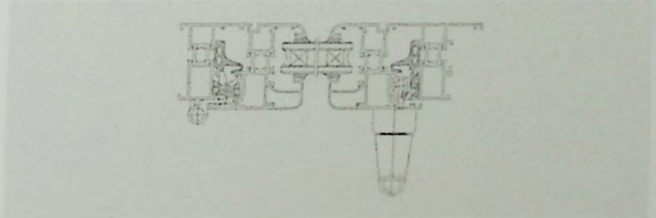


注 绿色标记为可供选择。
Green marking is available for choice





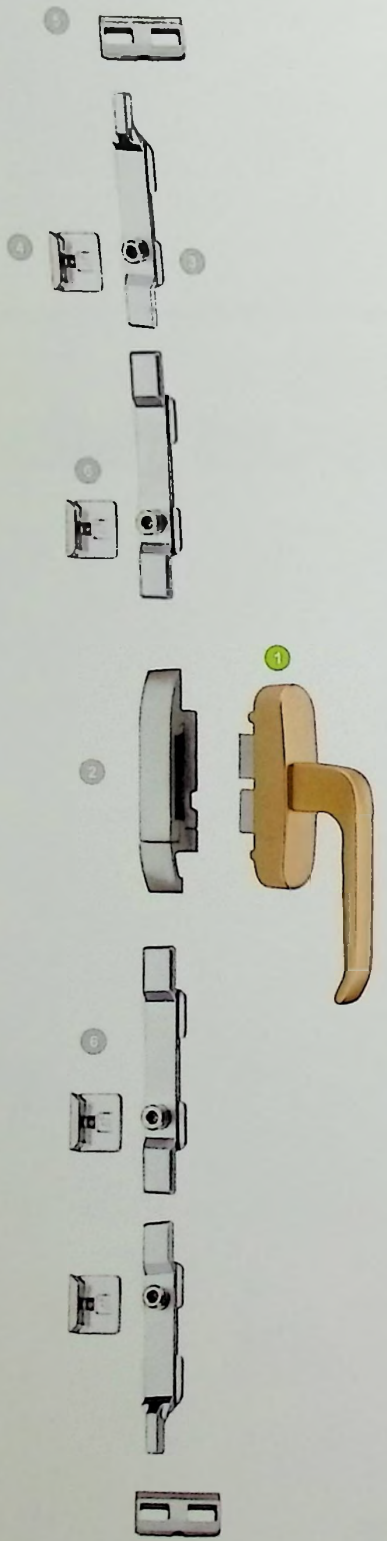





JS-CK579 20槽四点锁(上下插销式)
20 grooved four point lock (upper & down pin)

序号 NO.	配件名称 NAME		配件编号 PART NO.	数量 QUANTITY
1	内平开执手	Swing-in handle	JS-8344	1
2	连接中件	Connection middle parts	JS-2010	1
3	连接边件	Connection side parts	JS-2008	2
4	锁扣	Buckle	JS-5007	4
5	助升器	Rise-helping block	JS-209	2
6	多点连接件	Multipoint connecter	JS-2005	2
7	合页	Hinge	JS-5724	2
8	二连杆	2 links bar	JS-3033	1


可选配 / Selected Mating

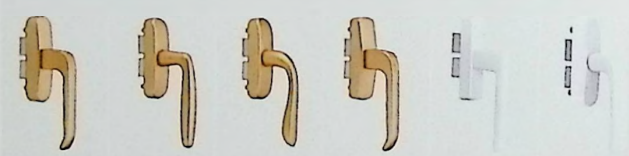


JS-ZS8344 JS-ZS8299 JS-ZS8333 JS-ZS8355 JS-ZS8022 JS-ZS8255




注 绿色标记为可供选择。
Green marking is available for choice

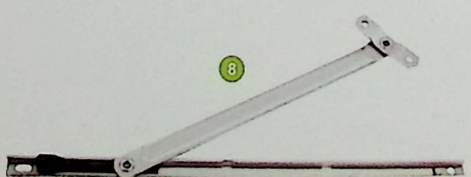









JS-CK566 20槽二点锁(内开)

20 grooved two-point lock (internal open)


序号 No	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	内平开执手	Swing-in handle	JS-835	1
2	长连接中件	Long connection middle parts	JS-201203	1
3	连接边件	Connection side parts	JS-2001	2
4	锁扣	Buckle	JS-5007	2
5	助升器	Rise-helping block	JS-2016	1
6	助升块	Rise-helping block	JS-2017	1
7	合页	Hinge	JS-5721	2
8	欧式风撑	European style wind brace	JS-3036	1

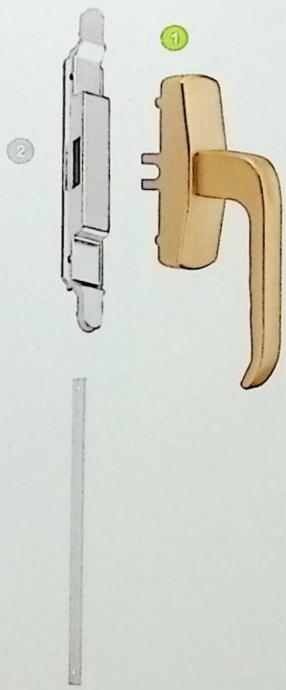

可选配 / Selected Mating

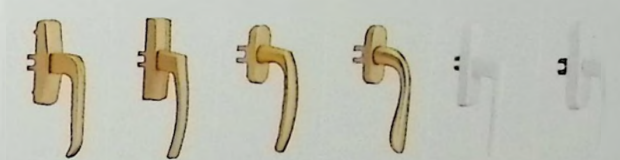



JS-ZS835 JS-ZS816B JS-ZS830 JS-ZS832 JS-ZS802 JS-ZS803



绿色标记为可供选择。
Green marking is available for choice









ALUMINUM ALLOY INNER LOCK SERIES

铝合金内开天地锁系列 喷塑55/古铜98





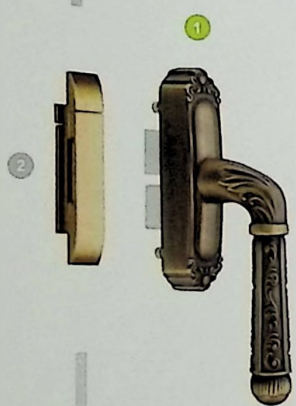





JS-CK567 20槽仿古铜色内开天地锁

20 grooved antique copper internal open lock

序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	内平开执手	Swing-in handle	JS-8400	1
2	连接中件	Connection middle parts	JS-2010	1
3	连接边件	Connection side parts	JS-2008	2
4	锁扣	Buckle	JS-5001	2
5	助升器	Rise-helping block	JS-2016	1
6	助升块	Rise-helping block	JS-209	2
7	合页	Hinge	JS-5721	2
8	二连杆(风撑)	2-links bar(wind bracing)	JS-3035	1


可选配 / Selected Mating

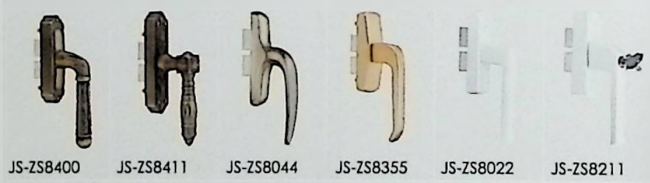





注 拔叉有多种长度选择
There are several lengths of yoke shifter for your choice


绿色标记为可供选择。
Green marking is available for choice










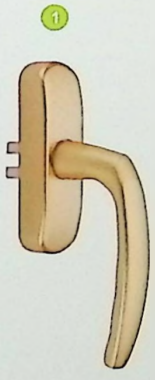








JS-CK570 20槽铝条式两点锁(内开)


20 grooved aluminum strips two-point lock (internal open)

序号 NO	配件名称 NAME		配件编号 PART NO.	数量 QUANTITY
1	内平开执手	Swing-in handle	JS-831	1
2	欧标铝条连件	Europe aluminum strips connecting piece	JS-403	1
3	锁扣	Buckle	JS-5007	2
4	助升器	Rise-helping block	JS-2016	1
5	助升块	Rise-helping block	JS-2017	1
6	合页	Hinge	JS-5724	2
7	欧式风撑	European-style wind bracing	JS-3036	1

可选配 / Selected Mating

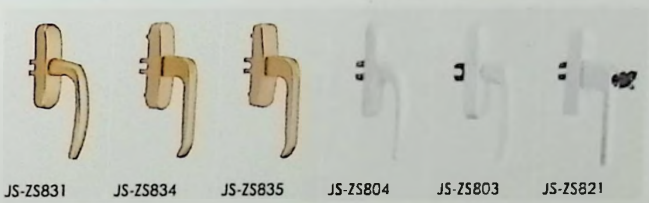

JS-ZS831 JS-ZS834 JS-ZS835 JS-ZS804 JS-ZS803 JS-ZS821




铝杆有：400、600、800、1000、1200mm多种尺寸供选择。
另铝杆可根据客户要求定做。
适用不同的铝型材，把手拨叉的长度和铝杆拨钉柱的长度有所不同。
客户在定货时请提供铝型材图纸或铝材实物便于厂家生产。


There are several sizes of aluminum rod for your choice, including 400mm,600mm,800mm, 1000mm and 1200mm,and others can be made according to the requirements of customers.


Different lengths of handle yoke shifter and the pull distance for the connection rod may match to different aluminum materials.

Please provide the specific aluminum material figure or real material for the manufacturer when place an order so that we can produce with specific requirements.

注 绿色标记为可供选择。
Green marking is available for choice



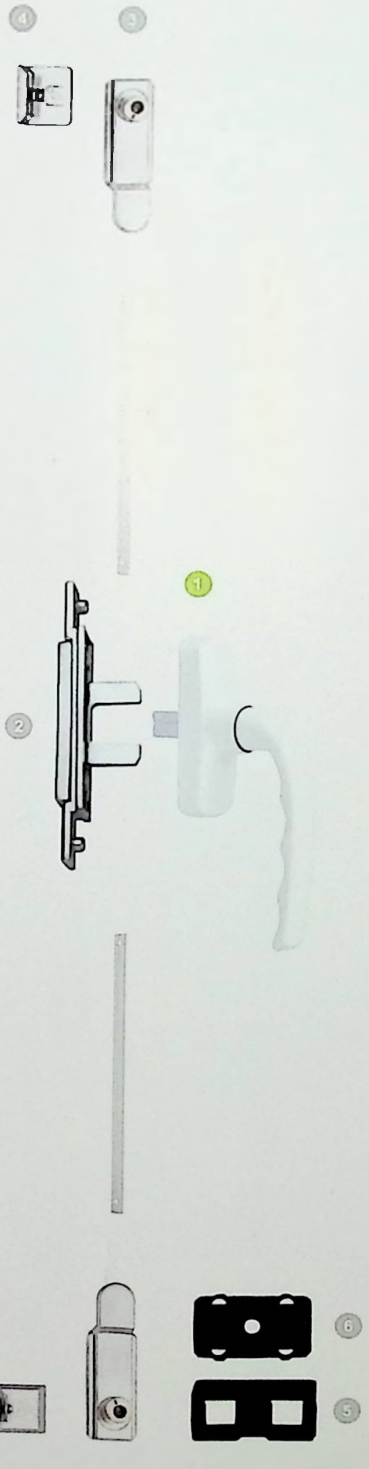





JS-CK569 20槽外开插坑式二点锁
20 grooved plug hole type two-point lock


序号 NO	配件名称 NAME		配件编号 PART NO.	数量 QUANTITY
1	外平开执手	Swing-out handle	JS-838C	1
2	连接中件	Connection middle parts	JS-2016	1
3	连接边件	Connection side parts	JS-2001	2
4	锁扣	Buckle	JS-5007	2
5	助升器	Rise-helping block	JS-2016	1
6	助升块	Rise-helping block	JS-2017	2
7	合页	Hinge	JS-5733	2
8	二连杆(风撑)	2 links bar (wind bracing)	JS-3035	1
9	欧标槽坠落器	Europe grooved anti-falling device	JS-901	1

可选配 / Selected Mating

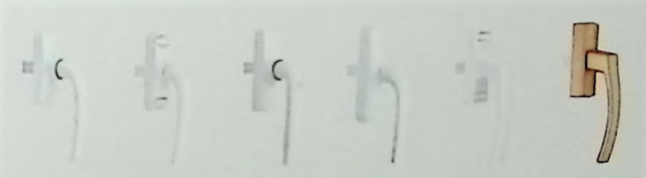

JS-ZS838C JS-ZS808C JS-ZS842 JS-ZS809 JS-ZS824C JS-ZS817C

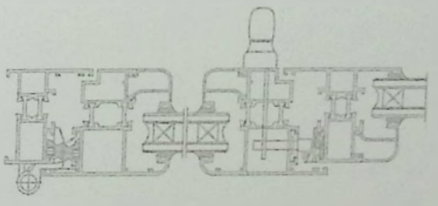




选用不同的铝型材，把手拨叉的长度和连接杆U型块的长度有所不同。
客户在定货时请提供铝型材图纸或铝材实物便于厂家生产。


Different lengths of handle yoke shifter and the U block length of driver may match to different aluminum materials.

Please provide the specific aluminum material figure or real material for the manufacturer when placing an order so that we can produce with specific requirements.


注 拨叉有多种长度选择
There are several lengths of yoke shifter for your choice

注 绿色标记为可供选择。
Green marking is available for choice










JS-CK571 20槽铝条式两点锁(外开)


20 grooved aluminum strips two-point lock (external open)

序号 NO	配件名称 NAME		配件编号 PART NO	数量 Q'TY
1	内平开执手	Swing-in handle	JS-ZS819	1
2	欧标铝条连件 Europe aluminum strips connecting piece		JS-404	1
3	移动锁点	Active latching point	JS-2014	2
4	锁扣	Buckle	JS-5019	2
5	欧标槽坠落器	Europe grooved anti-falling device	JS-901	2
6	平开四连杆	Flat open four link	JS-3031	2

可选配 / Selected Mating

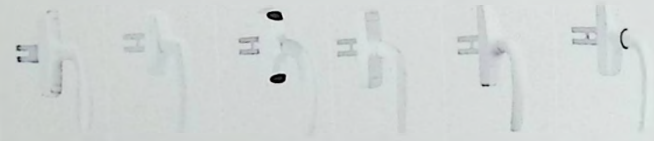

JS-ZS819 JS-ZS810 JS-ZS811 JS-ZS812 JS-ZS814 JS-ZS838

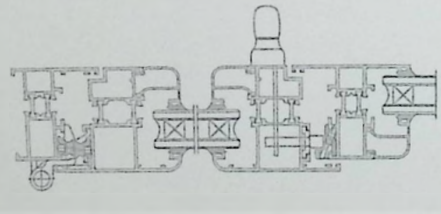




铝杆有：400、600、800、1000、1200mm多种尺寸供选择。
另铝杆可根据客户要求定做。
选用不同的铝型材，把手拔叉的长度和铝杆拔钉柱的长度有所不同。
客户在定货时请提供铝型材图纸或铝材实物便于厂家生产。


There are several sizes of aluminum rod for your choice, including 400mm,600mm,800mm,1000mm and 1200mm and others can be made according to the requirements of customers.


Different lengths of handle yoke shifter and the pull distance for the connection rod may match to different aluminum materials.


Please provide the specific aluminum material figure or real material for the manufacturer when place an order so that we can produce with specific requirements.

注 绿色标记为可供选择。
Green marking is available for choice





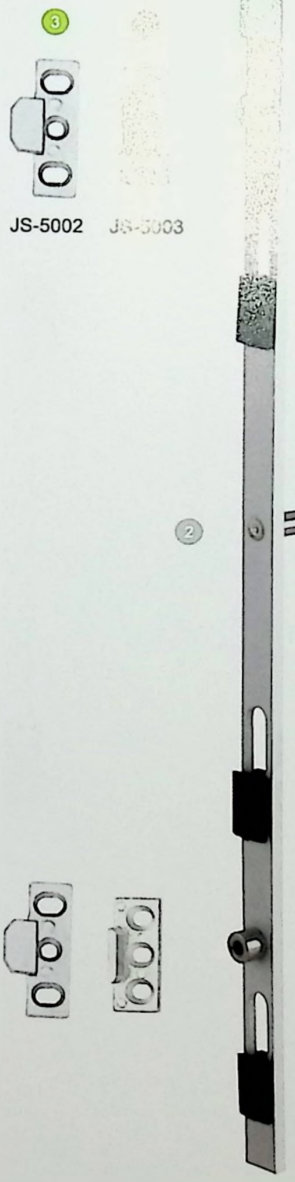





JS-CK572 国标铝条式两点锁(外开)

National aluminum strips two-point lock (external open)

序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	内平开执手	Swing-out handle	JS-808	1
2	铝条	Aluminum rod	JS-406	1
3	锁扣	Buckle	JS-5003	2
4	欧标槽坠落器	Europu grooved anti-falling device	JS-901	1
5	平开四连杆	Flat open four link	JS-3031	2

可选配 / Selected Mating

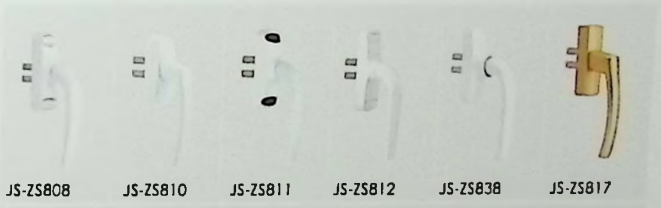

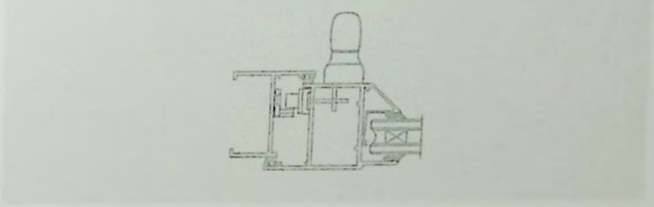


铝杆有：400、600、800、1000、1200mm多种尺寸供选择。
另铝杆可根据客户要求定做。
选用不同的铝型材，把手拔叉的长度和铝杆拔钉柱的长度有所不同。
客户在定货时请提供铝型材图纸或铝材实物便于厂家生产。

There are several sizes of aluminum rod for your choice, including 400mm, 600mm, 800mm, 1000mm and 1200mm, and others can be made according to the requirements of customers.

Different lengths of handle yoke shifter and the pull distance for the connection rod may match to different aluminum materials.

Please provide the specific aluminum material figure or real material for the manufacturer when place an order so that we can produce with specific requirements.

绿色标记为可供选择。
Green marking is available for choice







JS-CK573 国标铝条式两点锁外开(插坑)

National aluminum strips two-point lock (external open/plug hole)

序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	外平开执手	Swing-out handle	JS-810	1
2	铝条	Aluminum rod	JS-409	1
3	锁扣	Buckle	JS-5002	2
4	欧标槽坠落器	Europe grooved anti-falling device	JS-901	1
5	合页	Hinge	JS-5732	2

可选配 / Selected Mating



JS-ZS810 JS-ZS811 JS-ZS812 JS-ZS814 JS-ZS825 JS-ZS817



铝材长：400、600、800、1000、1200mm多种尺寸供选择。
另铝材可根据客户要求定做。
选用不同的铝型材，把手拔叉的长度和铝材拔钉柱的长度有所不同。
客户在定货时请提供铝型材图纸或铝材实物便于厂家生产。

There are several sizes of aluminum rod for your choice, including 400mm,600mm 800mm 1000mm and 1200mm and others can be made according to the requirements of customers.

Different lengths of handle yoke chiller and the pull distance for the connect on rod may match to different aluminum materials.

Please provide the specific aluminum material figure or real material for the manufacturer when place an order so that we can produce with specific requirements.

绿色标记为可供选择。
Green marking is available for choice









JS-CK574 国标推拉门窗两点锁
National sliding door or window two-point lock

序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	外平开执手	Swing-out handle	JS-821	1
2	铝条	Aluminum rod	JS-410	1
3	锁扣	Buckle	JS-511	2
4	合页	Hinge	JS-5732	2

可选配 / Selected Mating

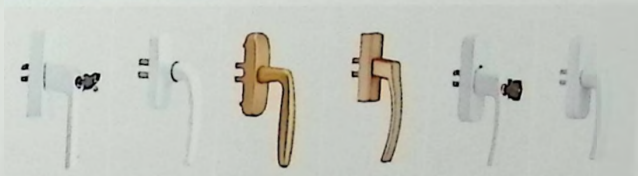

JS-ZS821 JS-ZS838 JS-ZS829 JS-ZS817 JS-ZS839 JS-ZS843




铝杆有：400、600、800、1000、1200mm多种尺寸供选择。
另铝杆可根据客户要求定做。
适用不同的铝型材，把手拨叉的长度和铝杆拨钉柱的长度有所不同。
客户在定货时请提供铝型材图纸或铝材实物便于厂家生产。

There are several sizes of aluminum rod for your choice, including 400mm,600mm,800mm,1000mm and 1200mm,and others can be made according to the requirements of customers.

Different lengths of handle yoke shifter and the pull distance for the connection rod may match to different aluminum materials.


Please provide the specific aluminum material figure or real material for the manufacturer when place an order so that we can produce with specific requirements.


注 绿色标记为可供选择。
Green marking is available for choice





ALUMINUM ALLOY TWO-POINT LOCK SERIES

铝合金两点锁系列 /喷塑77





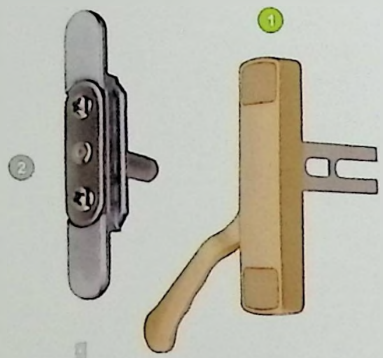




JS-CK579 20槽拔钉式二点锁

20 rebate nail type two-point lock

序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	执手	Handle	JS-8052	1
2	中连接件	Connection middle parts	JS-2012	1
3	连接边件	Connection side parts	JS-2001	2
4	锁扣	Buckle	JS-5007	2
5	助升器	Rise-helping block	JS-2016	1
6	助升块	Rise-helping block	JS-2017	2
7	180隐形铰链	180 invisible hinge	JS-180	2

可选配 / Selected Mating

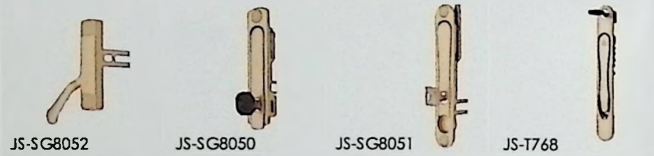



选用不同的铝型材，把手拔叉的长度和连接拔钉柱的长度有所不同。
客户在定货时请提供铝型材图纸或铝材实物便于厂家生产。


Different lengths of handle yoke shifter and the pull distance of driver may match to different aluminum materials.


Please provide the specific aluminum material figure or real material for the manufacturer when place an order so that we can produce with specific requirements.


注 绿色标记为可供选择。
Green marking is available for choice

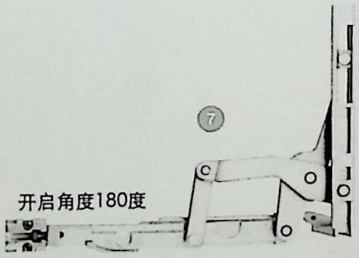

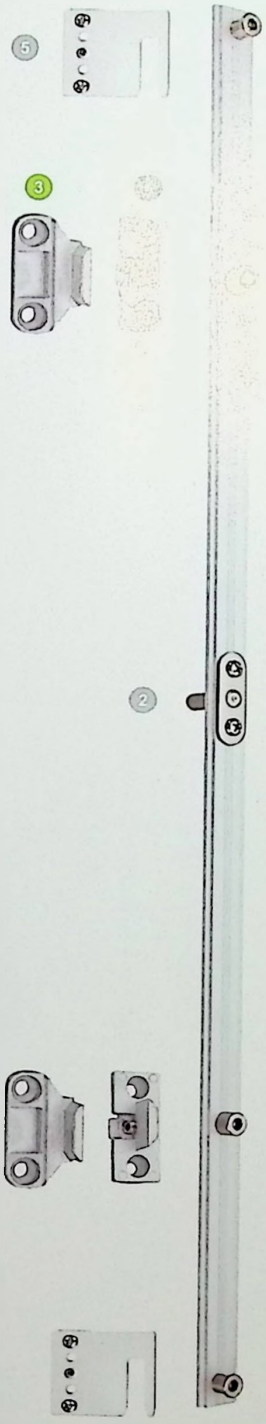








JS-CK580 55/65/70双外开
55/65/70 double outward opening

序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	广式大座执手(内外开)	Swing-in handle	JS-ZS833	1
2	铝杆	Aluminum pole	JS-LT413	1
3	锁扣A	Buckle A	JS-SK5018	2
4	锁扣B	Buckle B	JS-SK5017	2
5	65锁勾	Latch lock	JS-65	1
6	65双外开合页	Hinge	JS-HY5747	2
7	欧标槽坠落器 Europe grooved anti-falling device		JS-FZ901	1
8	二连杆	2-links bar	JS-FC3033	1

可选配 / Selected Mating

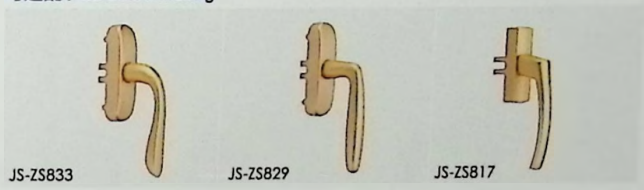


铝杆有：400、600、800、1000、1200mm多种尺寸供选择。
另铝杆可根据客户要求定做。
选用不同的铝型材，把手拨叉的长度和铝杆拨钉柱的长度有所不同。
客户在定货时请提供铝型材图纸或铝材实物便于厂家生产。


There are several sizes of aluminum rod for your choice, including 400mm,600mm,800mm,1000mm and 1200mm,and others can be made according to the requirements of customers.

Different lengths of handle yoke shifter and the pull distance for the connection rod may match to different aluminum materials.

Please provide the specific aluminum material figure or real material for the manufacturer when place an order so that we can produce with specific requirements.

注 绿色标记为可供选择。
Green marking is available for choice

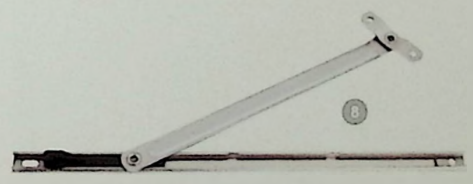



SQUARE STEEL TYPE
TWO-POINT LOCK SERIES

方钢式两点锁系列

JS-CK575 平槽方钢二点锁(内开)

Flat grooved steel two-point lock(internal open) / 50


序号 NO.	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	韩式执手	Korea handle	JS-8031	1
2	锁盒	Lock box	JS-1006	1
3	防盗锁扣	Anti-theft lock catch	JS-SK5012	2
4	防盗边连接件	Anti-theft edge connection part	JS-LJ2003	2


注 绿色标记为可供选择。
Green marking is available for choice


欧标槽二点锁(内开)

Europe grooved two-point lock (internal open) / 50

序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	标准执手	Standard handle	JS-8017	1
2	锁盒	Lock box	JS-1005	1
3	连接铝杆	Connecting aluminum rod	JS-405	2
4	锁扣	Buckle	JS-5007	2




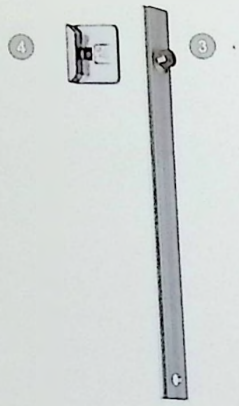

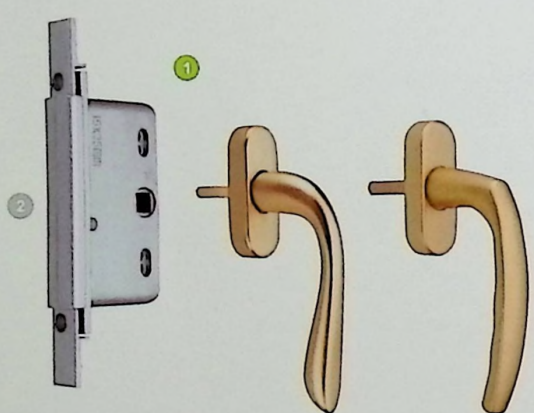


JS-SG8031


JS-SG8033

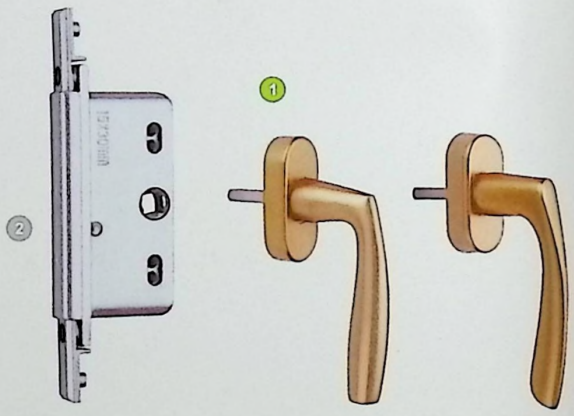

JS-SG8017

JS-SG8039





JS-CK577 欧标式方钢二点锁

Europe steel two-point lock / 喷塑35


序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	剑式执手	Sword handle	JS-8022	1
2	锁盒	Lock box	JS-1003	1
3	边锁件	Side lock parts	JS-2001	2
4	锁扣	Buckle	JS-5007	2

注 绿色标记为可供选择。
Green marking is available for selection

JS-CK578 方钢式二点锁

Square steel two-point lock /喷塑35

序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY
1	隐形执手	Invisible handle	JS-8054	1
2	锁盒	Lock box	JS-1004	1
3	T形扣	T buckle	JS-11	2
4	U形扣	Buckle	JS-10	2

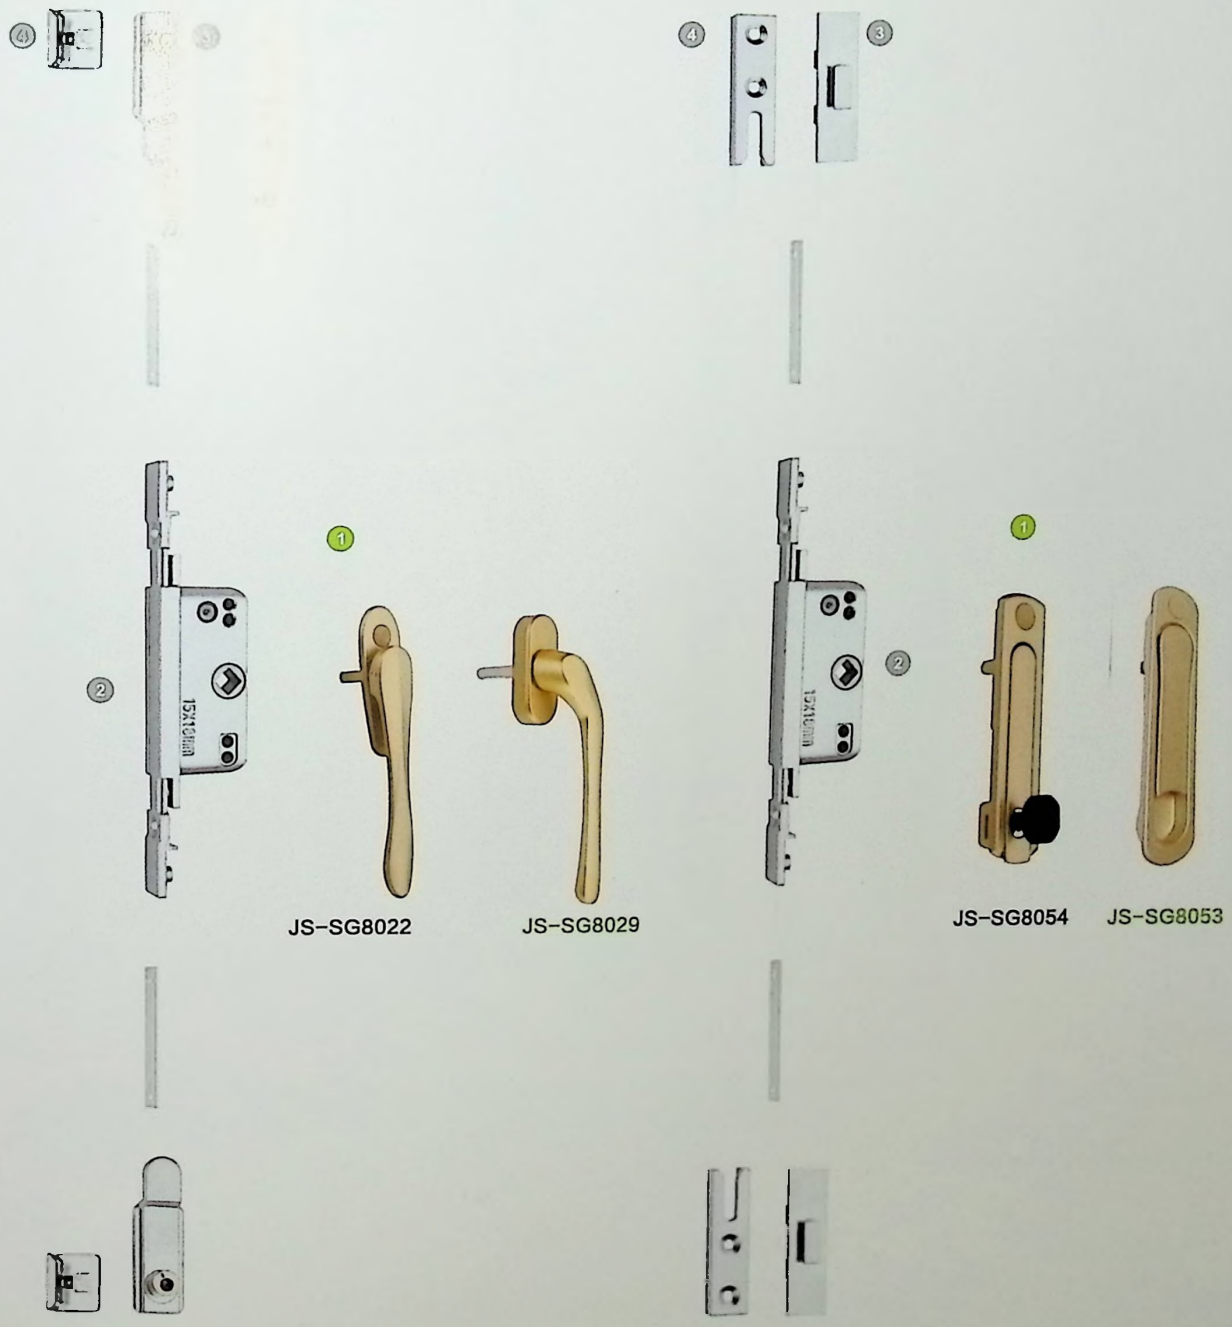

ALUMINUM POLE SERIES

铝杆系列



JS-LT401

欧标幕墙(直插式)铝条
方槽4×16或4×24

European standard curtain wall (plug-in) aluminum string
Square groove 4X16 or 4X24

JS-LT402

欧标幕墙外开(插坑式)铝条

European standard curtain wall (inserted pit type) aluminum string

JS-LT403

欧标内开(拔钉式)铝条

European internal open (nail extraction type) aluminum string

JS-LT404

欧标外开(拔钉式)铝条

European standard (nail extraction type) aluminum string

JS-LT405

欧标(挂式)铝条

European standard (hung type) aluminum string

JS-LT412

欧标移动(挂式)铝条

Europe shifting(hung type) aluminum string


JS-LT413

欧标双开铝条

European standard double opening aluminum bar

B.D.BB.C.TL.AB宽度分14mm，16mm。
20E.20D.20B.20A宽度分20mm，23mm。
规格400mm/7，600mm/7.8，800/9.2mm，1000/10.3mm，1200/11.5mm，1400mm/12.7尺寸可供选择。
另连接铝条可根据客户要求定做。

Http://www.xgjsxl.com
E-mail:xgjsxl@163.com

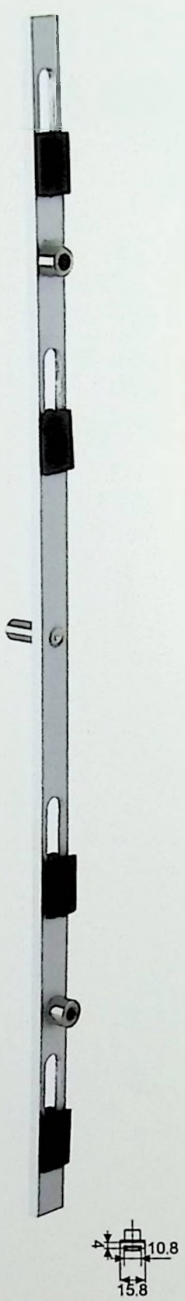

JS-LT406

14mm/16mm

平槽两点(拔钉式)铝条

plain groove two-point (nail extraction type) aluminum string




JS-LT407

14mm/16mm

平槽(插坑式)铝条

Plain groove (inserted pit type) aluminum string

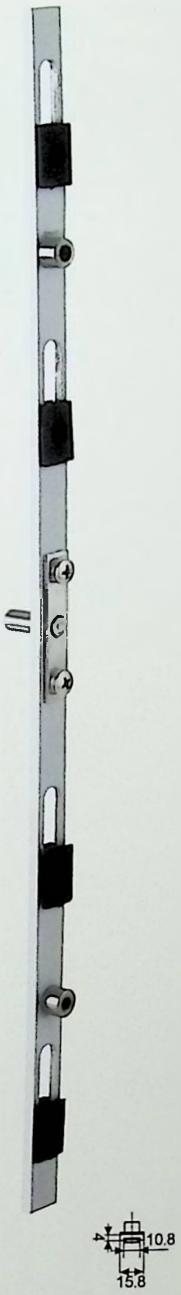


JS-LT408

14mm/16mm

平槽(拔钉式)铝条

Plain groove (nail extraction type) aluminum string

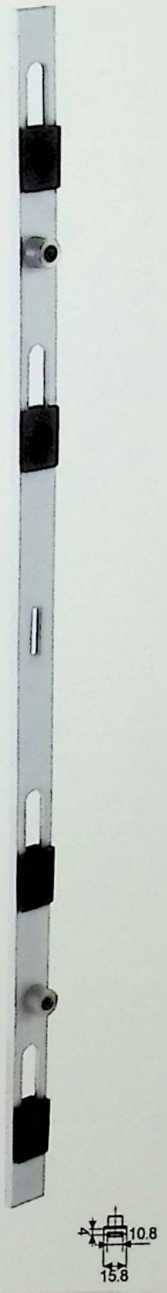

JS-LT409

14mm/16mm

中两点(直插式)铝条

方槽4×16或4×24

Medium two-point (plug-in type) aluminum string Square groove 4X16 or 4X24



JS-LT410

14mm/16mm

推拉(拔钉式)铝条

Push-pull (nail extraction type)aluminum string



JS-LT411

14mm/16mm


平槽两点(挂式)铝条


Plain groove two-point (hang type) aluminum string


There are width of 14mm and 16mm for B.D.BB.C.TL.AB
There are width of 20mm and 23mm for 20E. 20D.20B.20A
There are specifications of 400mm. 600mm. 800mm. 1000mm. 1200mm and 1400mm for your choice.
The connection aluminum bars can be made according to the requirements of customers.

FLAT OPEN DOOR LOCK SERIES

平开门锁系列 /喷塑140



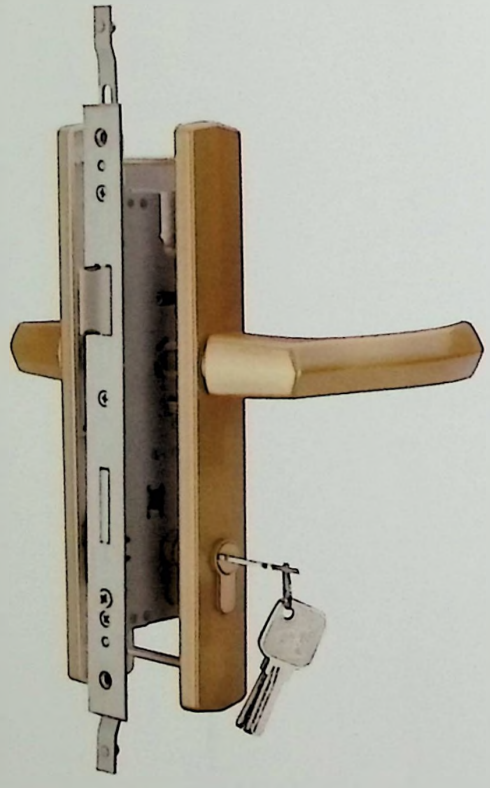





JS-CK576 多点平开门锁(双向)

Multi point flat open door lock (two way)

序号 NO	配件名称 NAME		配件编号 PART NO	数量 QUANTITY	备注 REMARKS
1	执手	Handle	JS-MS8650	1	可选配 Optional
2	锁芯	Lock cylinder	JS-SX740	1	可选配 Optional
3	锁体	Lock body	JS-ST8569	1	可选配85、92 Optional 85、92
4	锁扣板	Lock plate	JS-MK2	1	可选配 Optional
5	连接边件	Connection side parts	JS-LJ2001	2	
6	锁扣	Buckle	JS-SK5001	2	
7	合页	Hinge	JS-HY5701	3	可选配 两组三翼 三组三翼 Two sets three wings Three sets three wings
8	对穿螺丝	Piercing screws	M5×80	2	可选配 Optional

配置说明 / Allocation explanation /

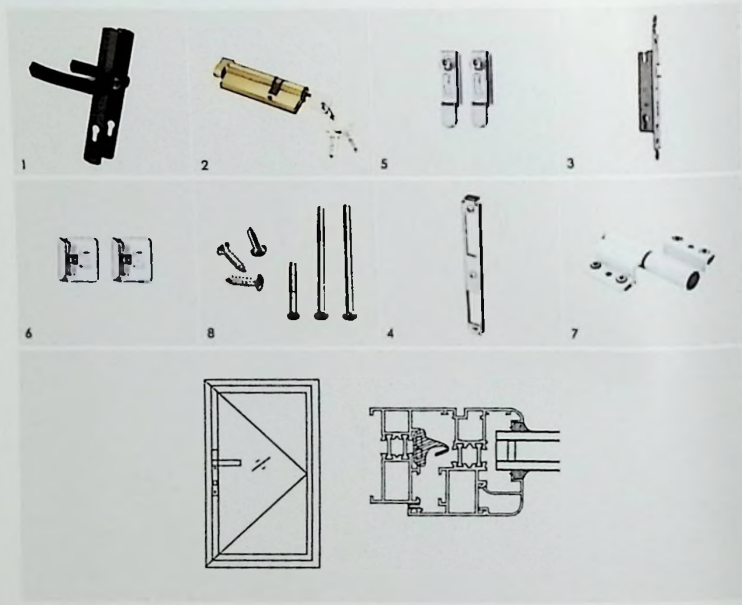





客户可按图册执手系列选配其他执手，合页系列先配其他合页；
本配置仅供参考，具体配置宜根据型材及窗规格而定；

Customers can select other handles and hinges according to figure.
This allocation is only for reference, the specific configuration shall be determined according to section bar and window specification.

绿色标记为可供选择。
Green marking is available for choice


JS-MS8658
23×25锁体
平开通道门锁
Flat open doorway lock /喷塑50

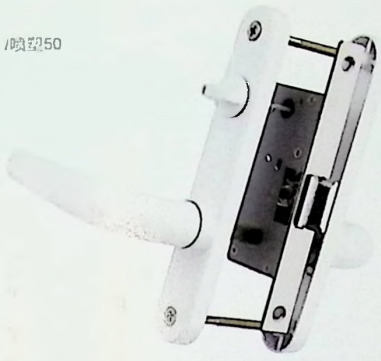


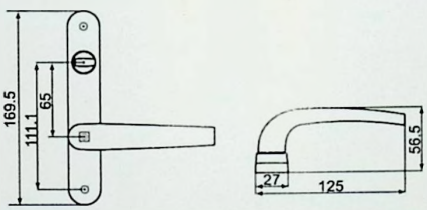

方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

JS-MS8659
塑钢门锁
Plastic steel lock /喷塑75

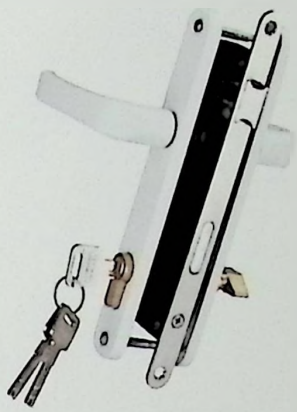




方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16


JS-MS8656
大柄门锁
Large handle door lock /喷塑80




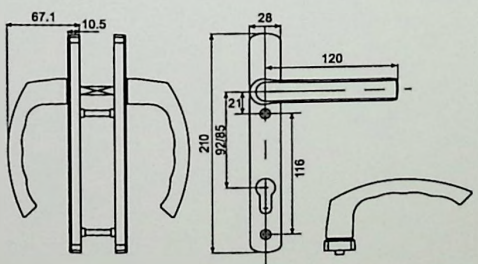

方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

JS-MS8668
博方门锁
Bofang door lock /氧化165

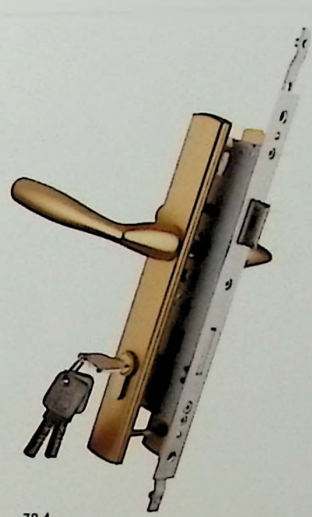



方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16


FLAT OPEN DOOR LOCK SERIES

平开门锁系列

JS-MS8651

50平开门锁（85系列）

50 casement lock(85 series) /28

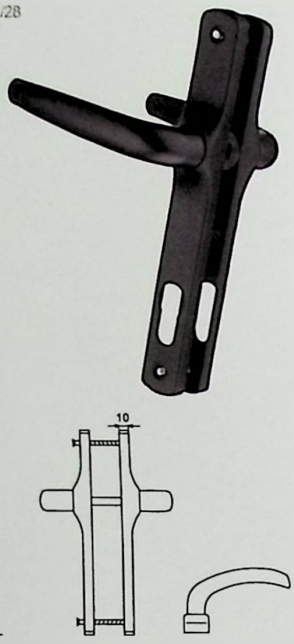


方杆长度=型材厚度+38
螺丝长度=型材厚度+16
Square bar length = profile thickness +38
Screw length = profile thickness +16

JS-MS8652

直柄门锁（85/92系列）

Straight handle lock(85/92 series) /28

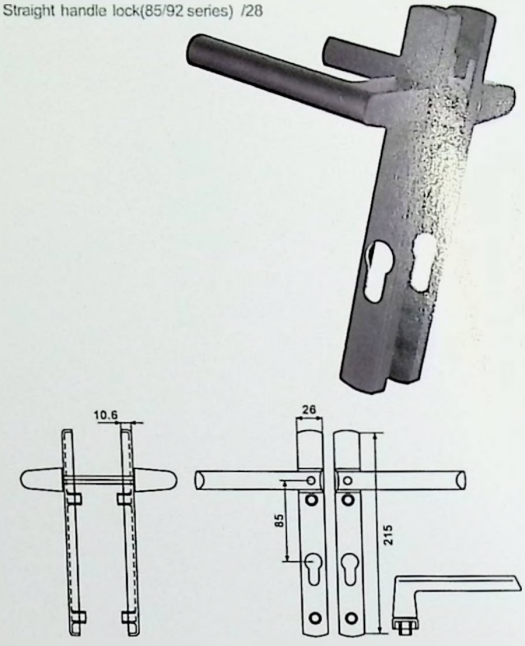


方杆长度=型材厚度+38
螺丝长度=型材厚度+16
Square bar length = profile thickness +38
Screw length = profile thickness +16

JS-MS8653

欧式门锁（85/92系列）

European style lock(85/92 series) /28

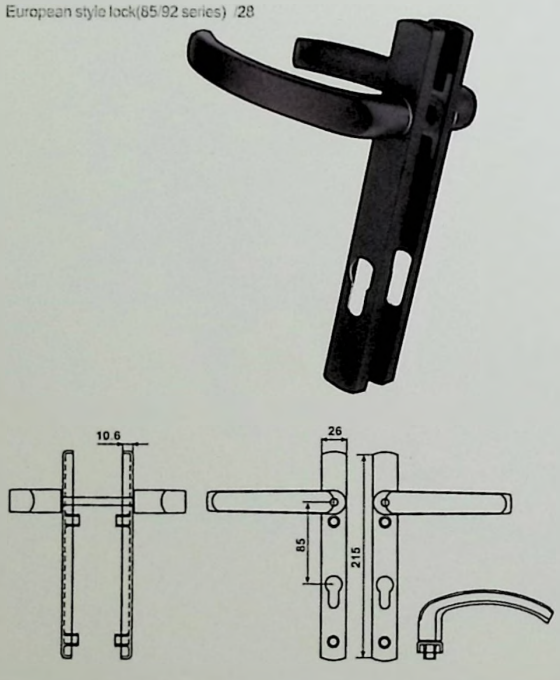


方杆长度=型材厚度+38
螺丝长度=型材厚度+16
Square bar length = profile thickness +38
Screw length = profile thickness +16

JS-MS8654

指纹门锁（85/92系列）


Passage lock (85/92 series) /28

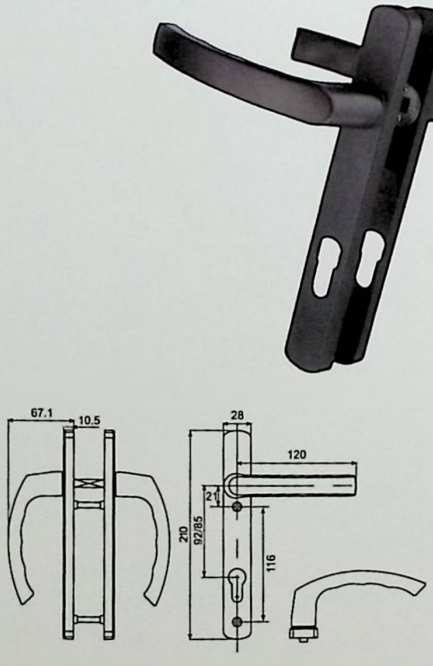


方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

Http://www.xqsxj.com
E-mail:xqsxj@163.com

JS-MS8655
豪华门锁（85/92系列）
Luxury door lock (85/92 series) /28

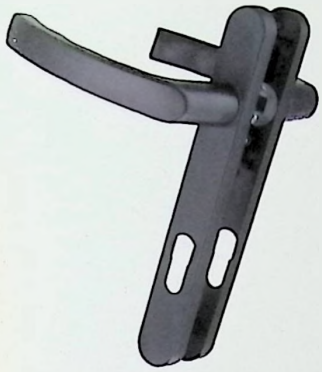


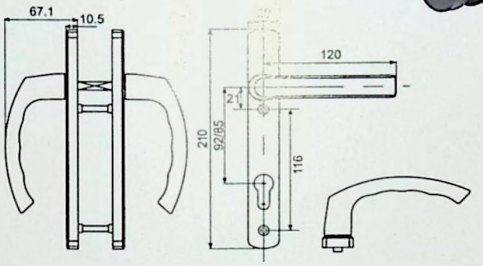

方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

JS-MS8656
大柄门锁（85/92系列）
Large handle lock (85/92 series) /28




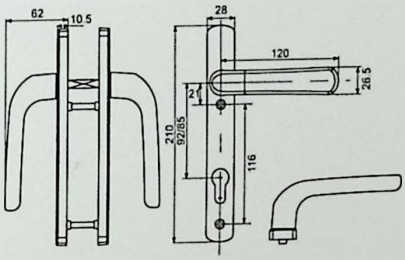

方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

JS-MS8649
德式门锁
German style door lock /32




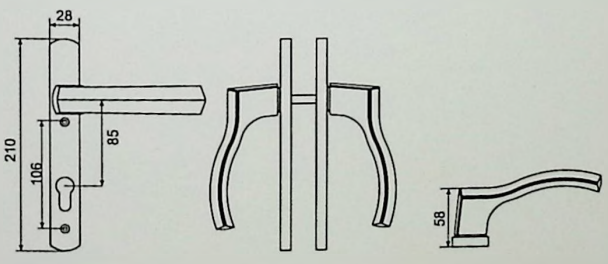

方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

JS-MS8650
德式加长门锁
German style prolonged door lock /35



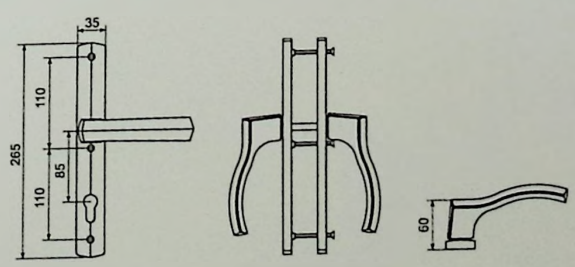


方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

FLAT OPEN DOOR LOCK SERIES

平开门锁系列

JS-MS8648
剑式高低门锁
Sword type high-low door lock 喷塑30/喷漆35






方杆长度=型材厚度+38
螺丝长度=型材厚度+16
Square bar length = profile thickness +38
Screw length = profile thickness +16


JS-MS8661
大柄高低门锁
Large handle high-low door lock 喷塑30/喷漆35






方杆长度=型材厚度+38
螺丝长度=型材厚度+16
Square bar length = profile thickness +38
Screw length = profile thickness +16


JS-MS8662
意式门锁
Italian style door lock / 氧化75

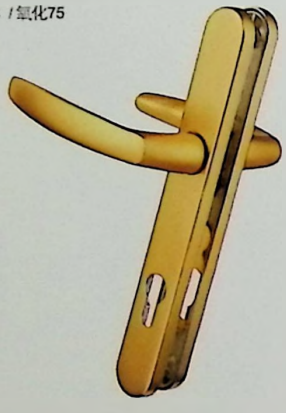




方杆长度=型材厚度+38
螺丝长度=型材厚度+16
Square bar length = profile thickness +38
Screw length = profile thickness +16

JS-MS8663
博士门锁
Bosch door lock / 氧化75

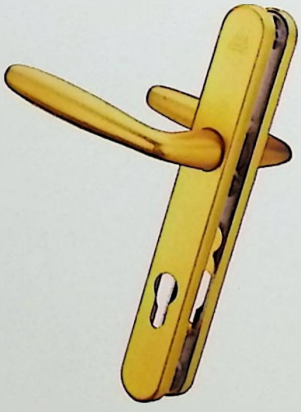





方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

Http://www.xgsw.com
E-mail:xgsw_s@163.com


JS-MS8664
欧洲高低门锁
European high-low door lock / 氧化85

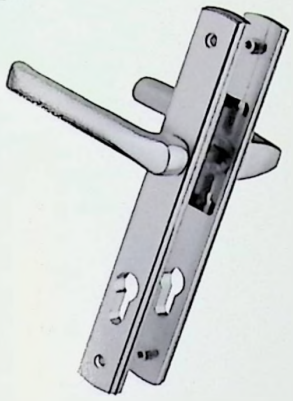




方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16


JS-MS8665
博美门锁
Bomei door lock / 氧化80

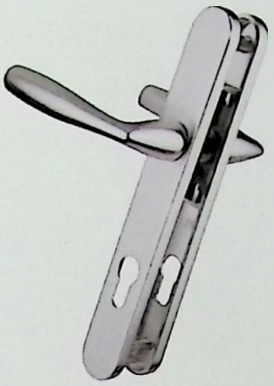




方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16


JS-MS8666
意方门锁
Yifang door lock / 氧化85

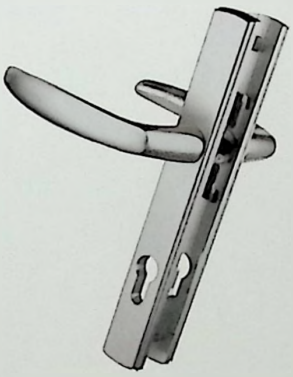




方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

JS-MS8667
方正门锁
Fangzheng door lock / 氧化85

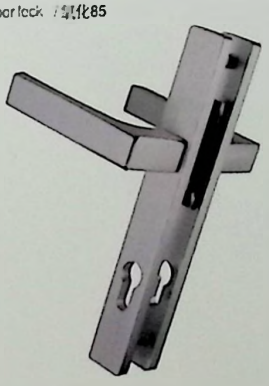




方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

FLAT OPEN DOOR LOCK SERIES

平开门锁系列


JS-MS8668
博方门锁
Bofang door lock /氧化85






方杆长度=型材厚度+38
螺丝长度=型材厚度+16
Square bar length = profile thickness +38
Screw length = profile thickness +16


JS-MS8669
欧洲门锁
European door lock /氧化85

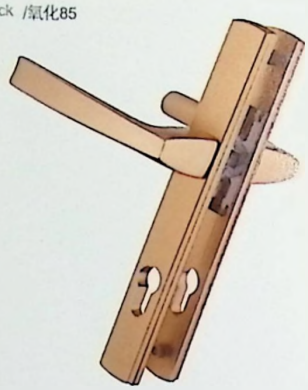




方杆长度=型材厚度+38
螺丝长度=型材厚度+16
Square bar length = profile thickness +38
Screw length = profile thickness +16


JS-MS8647
中式门锁(锌合金)
Chinese style door lock /古铜80

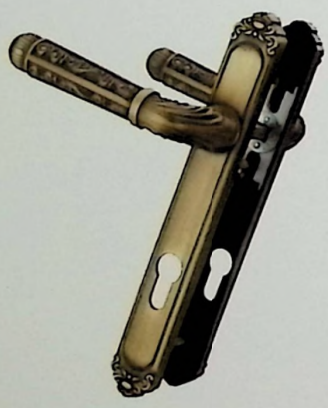


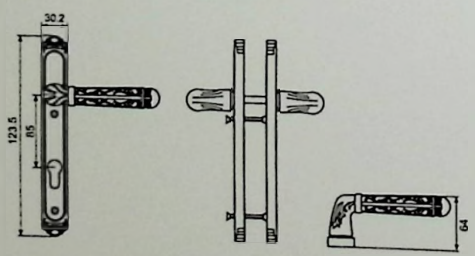

方杆长度=型材厚度+38
螺丝长度=型材厚度+16
Square bar length = profile thickness +38
Screw length = profile thickness +16

JS-MS8670
芬兰门锁(纯铜)
Finnish door lock pure copper /纯铜330

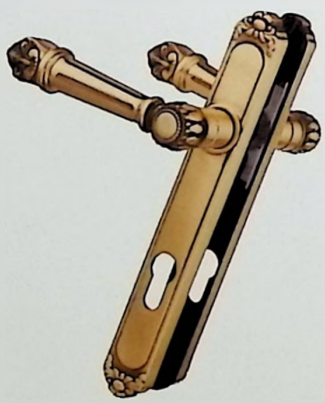




方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

JS-MS8671
圆柄门锁
Round handle door lock /咽塑28




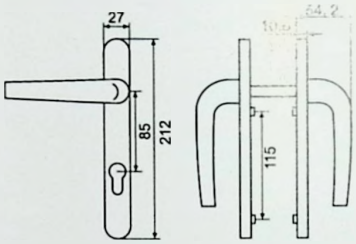

方杆长度=型材厚度+28
螺丝长度=型材厚度+16
Square bar length = profile thickness +28
Screw length = profile thickness +16

JS-MS8672
指纹密码锁
Intelligent password door lock /不锈钢拉丝800






指纹开门、密码开门、钥匙开门
304不锈钢产品、防水防冻
Opening by fingerprint, opening by password, opening by key
304 stainless steel product, waterproof and anti-freezing

JS-MS8673
指纹密码锁
Intelligent password door lock /不锈钢电镀金800






指纹开门、密码开门、钥匙开门
304不锈钢产品、防水防冻
Opening by fingerprint, opening by password, opening by key
304 stainless steel product, waterproof and anti-freezing

JS-MS8674
指纹密码锁
Intelligent password door lock /不锈钢电镀玫瑰金800





指纹开门、密码开门、钥匙开门
304不锈钢产品、防水防冻
Opening by fingerprint, opening by password, opening by key
304 stainless steel product, waterproof and anti-freezing

FLAT OPEN DOOR LOCK SERIES

平开门锁系列


JS-CK578 平开门锁

Flat open door lock


JS-MS8660

直柄双向门锁

Straight two-way door lock /50






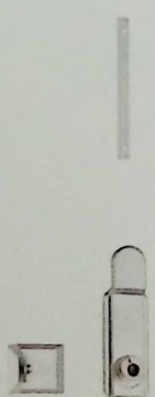



JS-MS8657

弓型分体门锁

Bow door lock /32

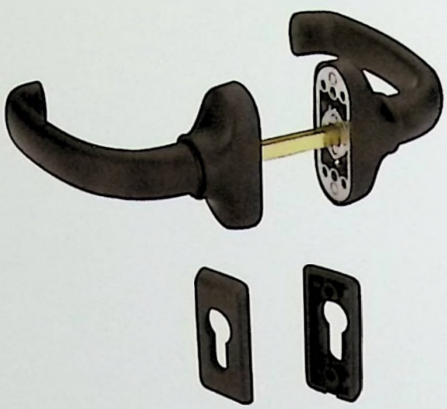










JS-MK1
1号弯扣板
=1 bent gusset plate /3.5

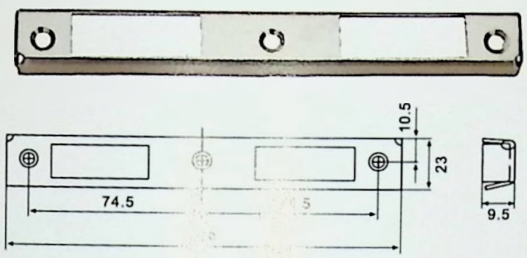


JS-MK2
2号弯扣板
=2 bent gusset plate /3.5

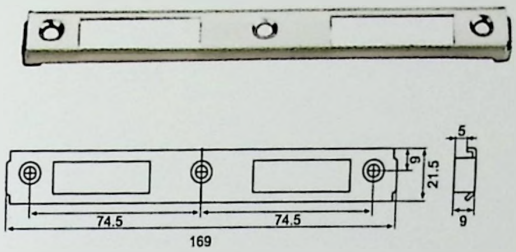


JS-MK4
4号平扣板
4= flat buckle /3.5

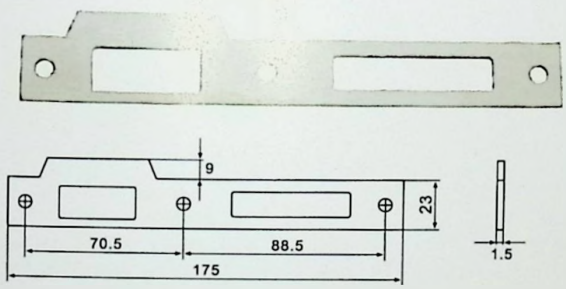


JS-MK5
5号平扣板
5= flat buckle /3.5

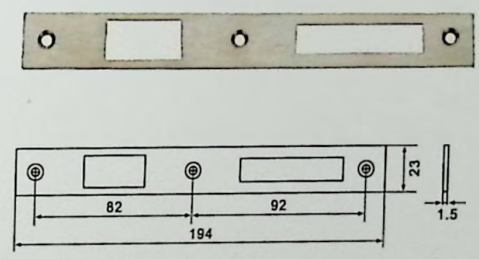


JS-MK6
6号平扣板
6= flat buckle /8

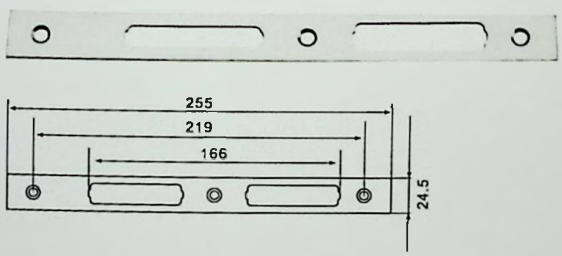


JS-MK7
塑钢锁扣板
Plastic steel channel locking plate /3.5

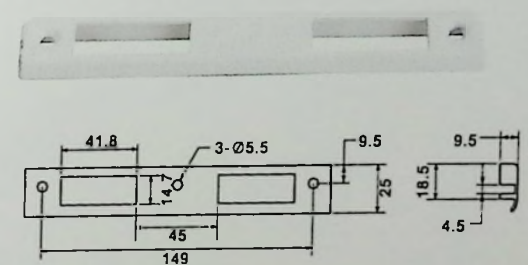

JS-MK3
通道门锁塑钢扣
Passage door lock plastic steel buckle /3

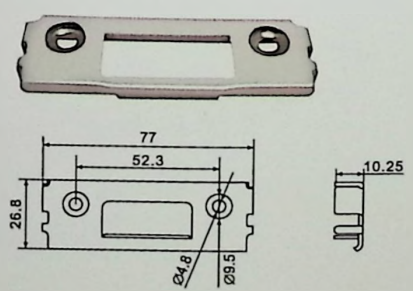

JS-MK8
通道门锁断桥扣
Passage door lock bridge-cut buckle /3

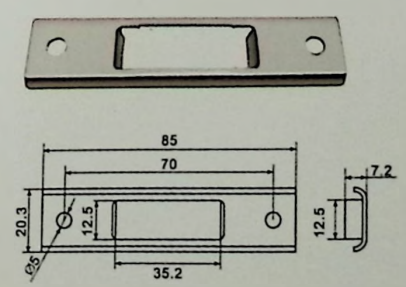


LOCK CYLINDER SERIES

锁芯系列

JS-SX730

60mm正芯


60mm center core /23.5

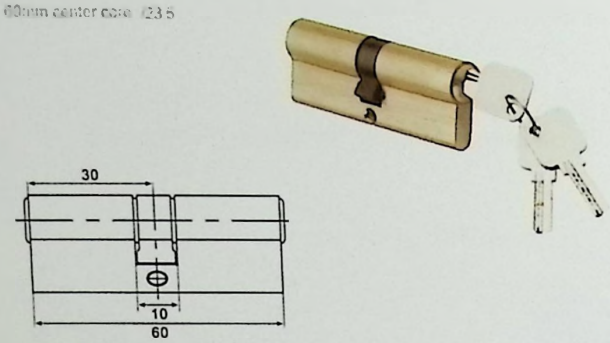

JS-SX731

70mm正芯(单开)


70mm center core(single-opening) /26.5

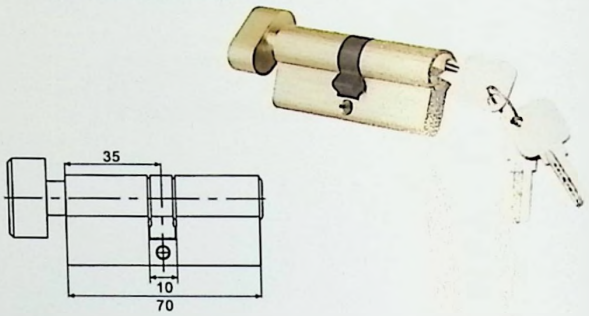

JS-SX732

70mm正芯


70mm center core /25

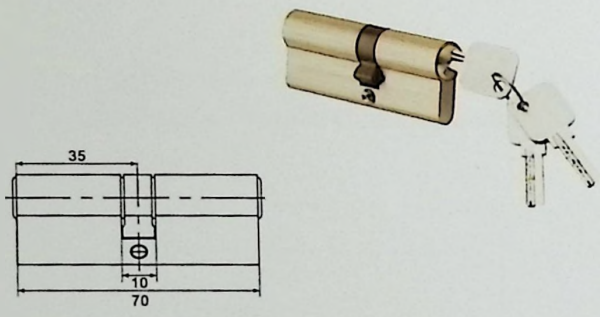

JS-SX733

80mm偏芯单开(50/30T)内开


80mm partial single open (50/30T) internal opening /28.5

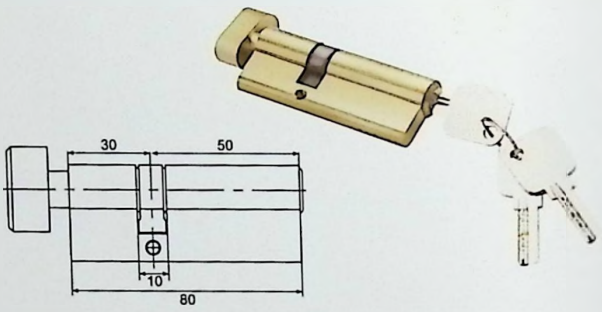

JS-SX734

80mm偏芯(45/35)


80mm raised core(45/35) /26.5

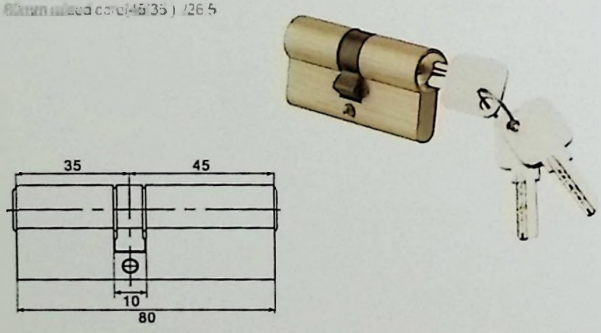

JS-SX735

80mm正芯


80mm center core /26.5

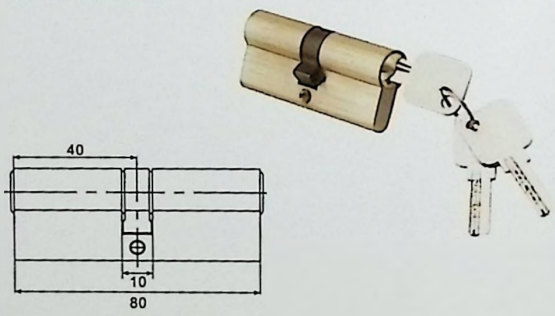

JS-SX736

85mm偏芯(55/30)


85mm raised core(55/30) /27.5

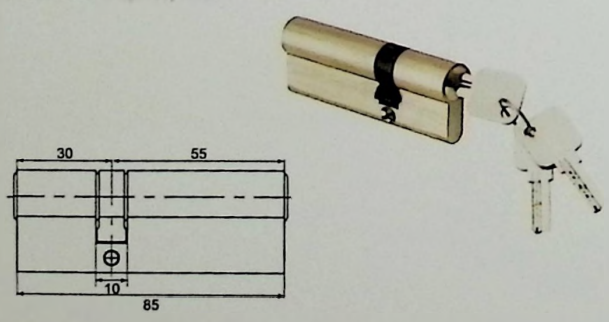

JS-SX738

85mm偏芯(T55/30)单开旋扭外开

85mm raised core(T55/30) Single external opening knob /29

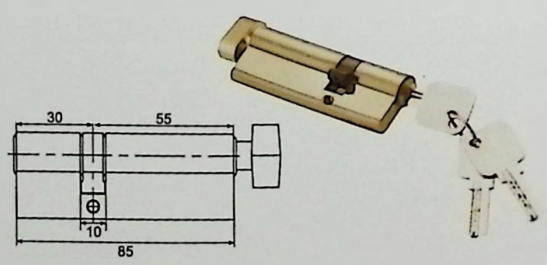

Http://www.xgsw.com
E-mail:xgsw@163.com


LOCK BODY SERIES


锁体系列

JS-ST8562

23锁体(85×20系列)

23 lock body (85×20 series) /20




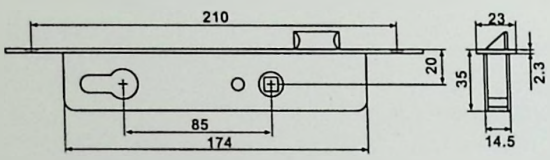


JS-ST8563

23锁体(85×25系列)

23 lock body (85×25 series) /20




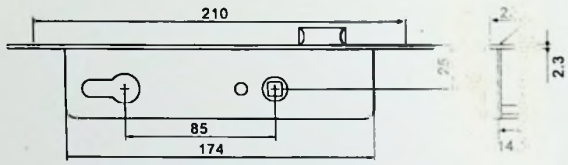


JS-ST8564

23锁体(85×30系列)

23 lock body (85×30 series) /22.5




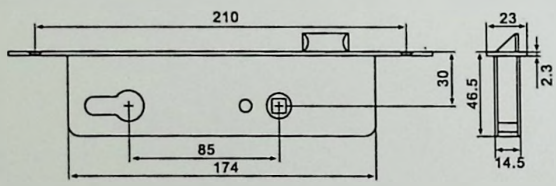


JS-ST8565

23锁体(85×35系列)

23 lock body (85×35 series) /22.5




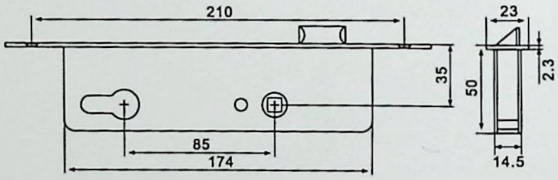


JS-ST8576

85×40锁体

85×40 lock body /25




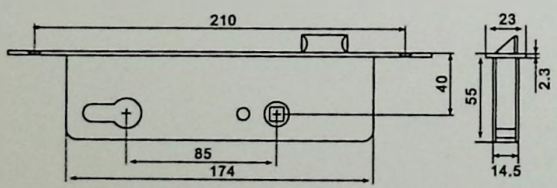


JS-ST8575

23锁体(85×35系列)(带轴承)

23 lock body (85×35 series) (With bearing) /25



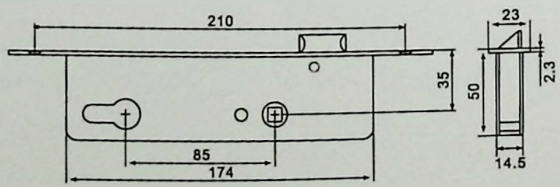


JS-ST8566

23多点锁体(85×30系列)

23 multi-point lock body (85×30 series) /55




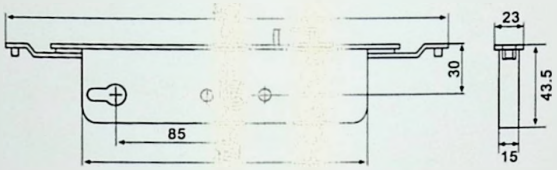


JS-ST8567

23多点锁体(85×35系列)

23 multi-point lock body (85×35 series) /55




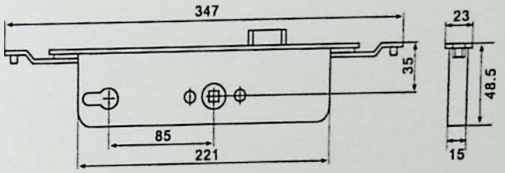


JS-ST8568

23多点锁体(85×28系列)

23 multi-point lock body (85×28 series) /50




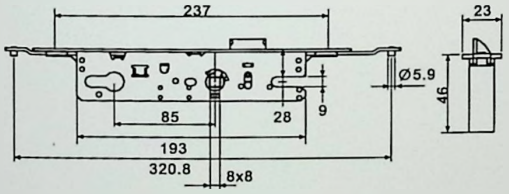


JS-ST8569

23多点锁体(85×33系列)

23 multi-point lock body (85×33series) /50



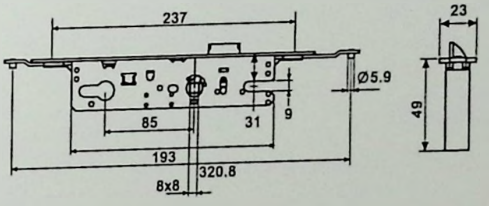


JS-ST8577

23多点锁体(85×40系列)

23 multi-point lock body (85×40series) /58




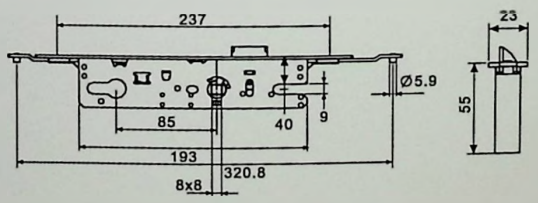


JS-ST8578

23多点锁体(85×45系列)

23 multi-point lock body (85×45series) /58



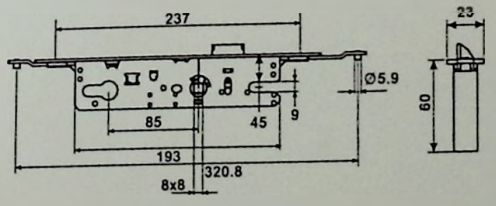


LOCK BODY SERIES

锁体系列

JS-ST8570

23多点锁体(85×35系列)


23 multi-point lock body (65×35 series) /64

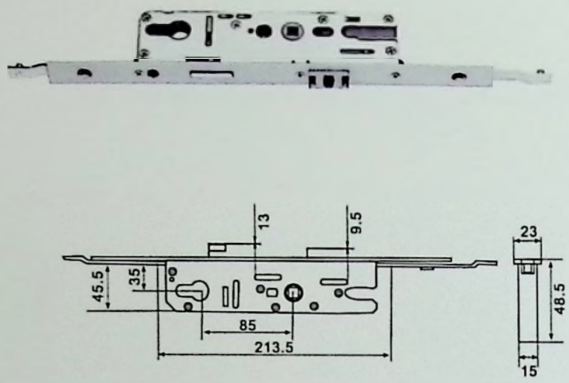

JS-ST8571

塑钢JS-16×25mm (85)L.M


Plastic steel JS-16×25mm (85)L. M /20

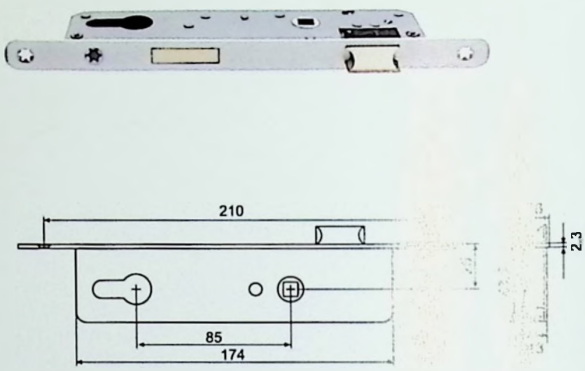

JS-ST8572

塑钢JS-16×30mm (85)L.M


Plastic steel JS-16×30mm (85) L. M /20

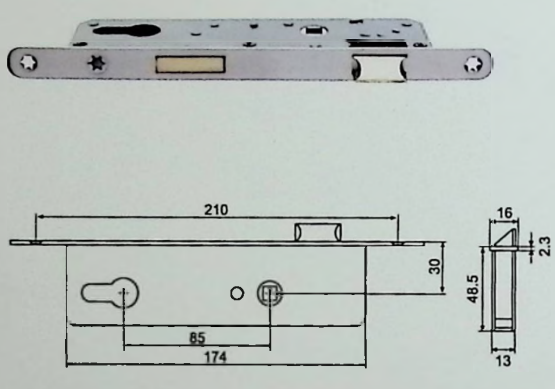

JS-ST8573

通道锁16X26 / 23X34mm

Passage lock 16X26 / 23X34mm /15

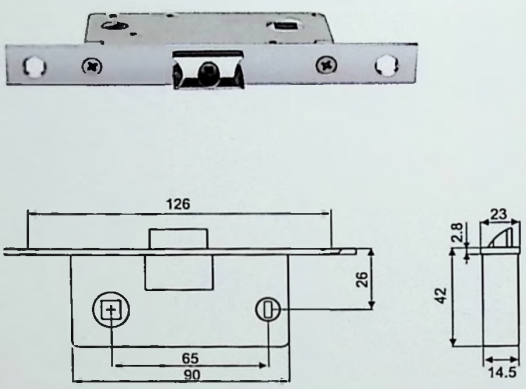


JS-MS8660

23×25锁体

碰珠门锁


23×25 lock body Bead door lock /25

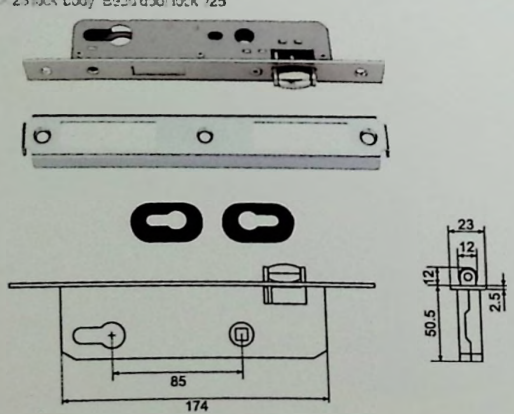

JS-ST8574

通道锁23X30 / 23X25mm

Passage lock 23X30 / 23X25mm /15

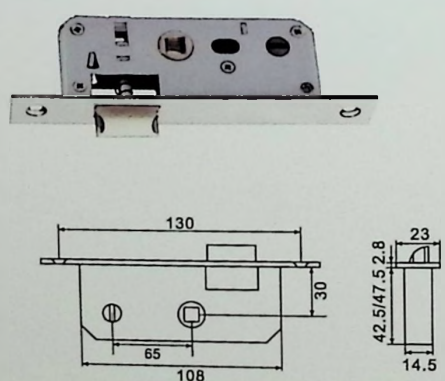



Http://www.xgsuo.com
E-mail:xgsuo@163.com

LOCK BODY SERIES


锁盒系列


JS-SH1001
锁盒15×13
Lock box 15×13mm /10



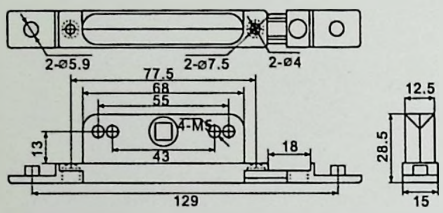



JS-SH1002
锁盒15×16
Lock box 15×16mm /10



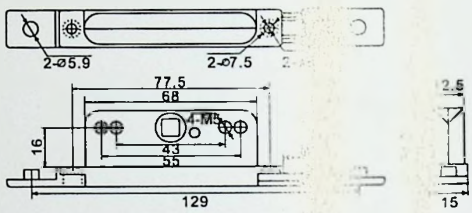



JS-SH1003
锁盒15×18
Lock box 15×18mm /11



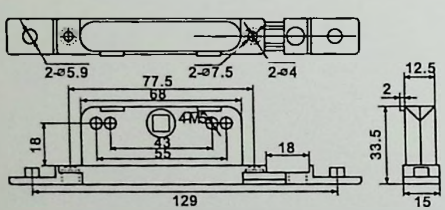



JS-SH1004
锁盒15×20
Lock box 15×20mm /11



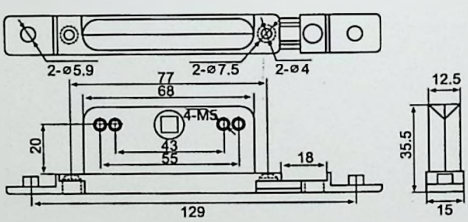


JS-SH1005
锁盒（双向）15×25
Lock box (two-way)15×25mm /15



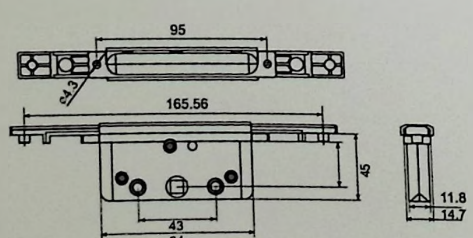


JS-SH1006
锁盒（双向）15×30
Lock box (two-way)15×30mm /17




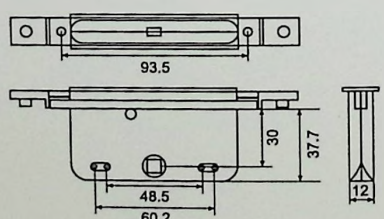


Http://www.xg[illegible].com
E-mail:xg[illegible]163.com


JS-SH1007
锁盒(双向)15×23
Lock box (two-way)15×23mm /13



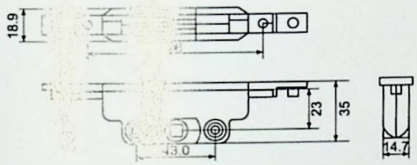



JS-SH1020
传动180度内倒锁盒 23×6
Driving 180 degrees 23×6 /30



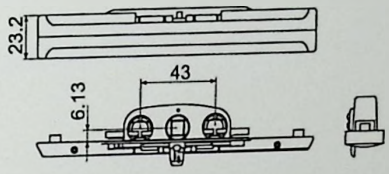


JS-SH1009
传动180度内开锁盒 22×15
Driving 180 degrees 22×15 /22



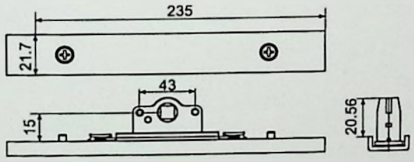


JS-SH1022
传动180度外开锁盒 23×25
Driving 180 degrees 23×25 /30



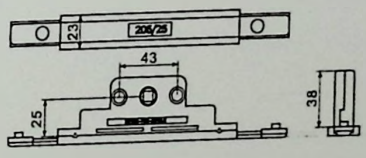



JS-SH1023
传动180度外开锁盒 23×30
Driving 180 degrees 23×30 /30



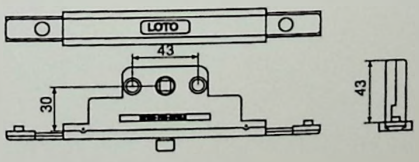

JS-SH1024
防盗20×32
Anti-theft 20×32 /35

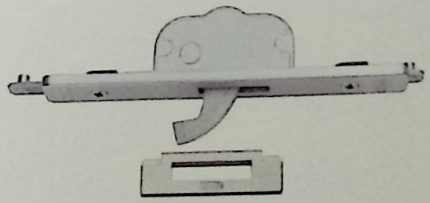

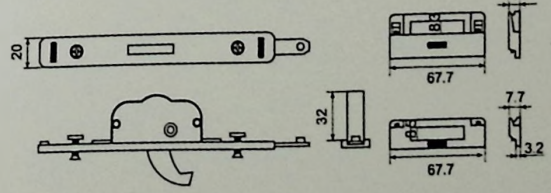


CASEMENT WINDOW HANDLE SERIES

外平开窗执手系列

JS-QZ6201
03执手(薄座)
03 handle (thin seat) /6






注 绿色标记为可供选择。
Green marking is available for choice


JS-QZ6202
03执手(厚座)
03 handle (thick seat) /6






JS-QZ6203
04执手
04 handle /7






JS-QZ6204
05平座执手
05 flat seat handle /6







JS-QZ6205
07弓形执手
07 bow holding handle /7






JS-QZ6206
06执手
06 handle /6

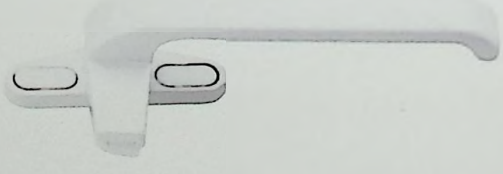





JS-QZ6207
50-11执手
50-11 handle /5.5

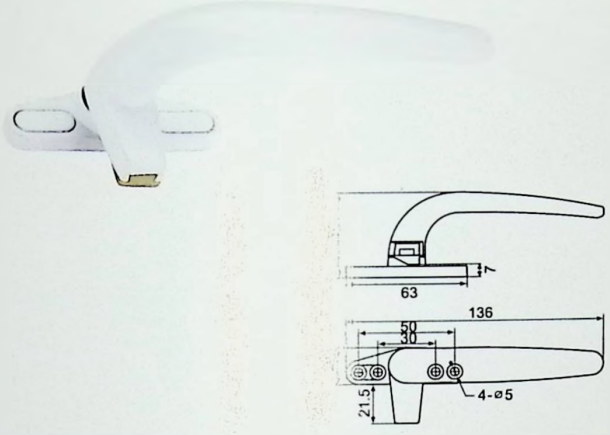

JS-QZ6208
50-12执手
50-12 handle /7

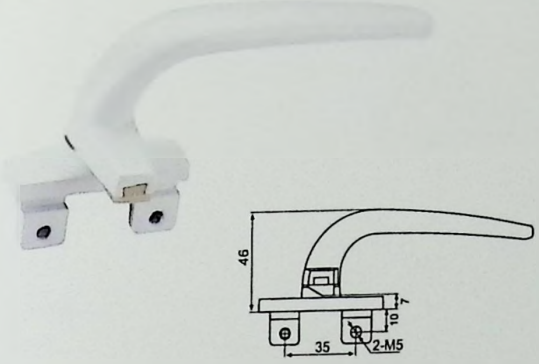


JS-QZ6209
818内外开执手
818 internal & external opening handle /12.5

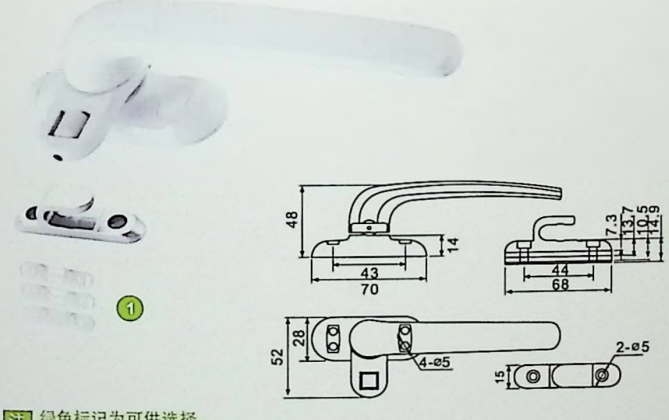


注 绿色标记为可供选择。
Green marking is available for choice

JS-QZ6210
塑钢七字执手
Plastic steel handle /5.5

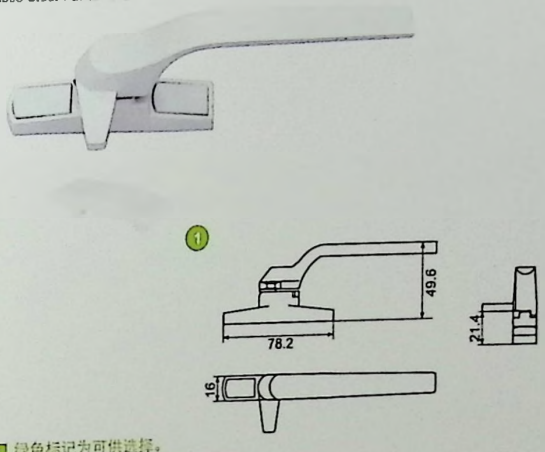


注 绿色标记为可供选择。
Green marking is available for choice

JS-SG8025
直柄塑钢执手(外开)
Straight plastic steel handle (external open) /5.5

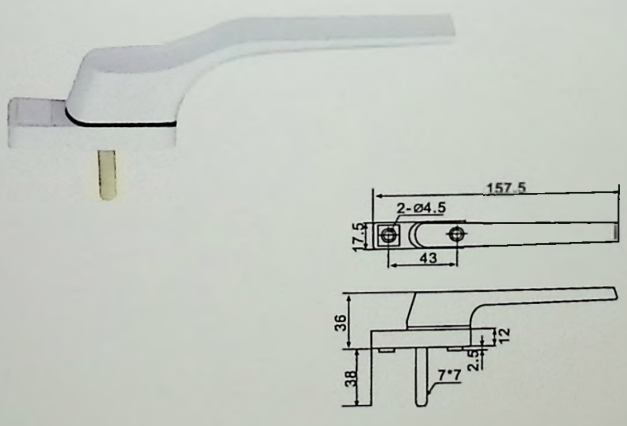


JS-SG8027
美式塑钢执手(外开)
America plastic steel handle (external open) /5.5

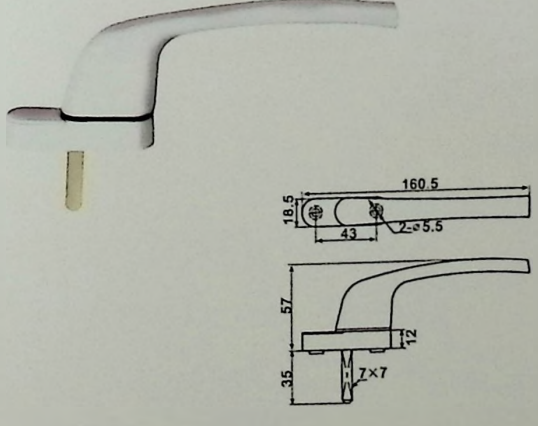


VARIOUS HANDLE

方钢执手


JS-SG8029
好式B执手(分左右)
Handle B(left & right) /氧化23

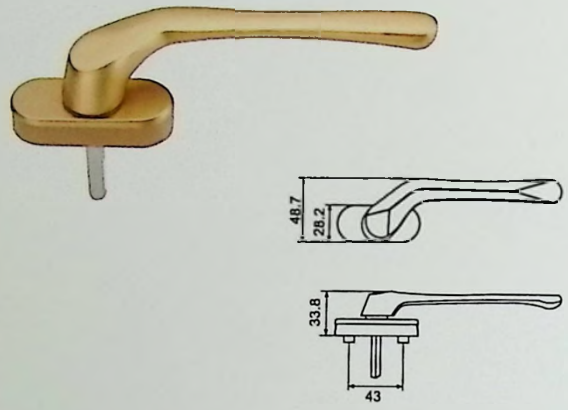


JS-SG8030
好式A执手(分左右)
Handle A(left & right) /氧化25

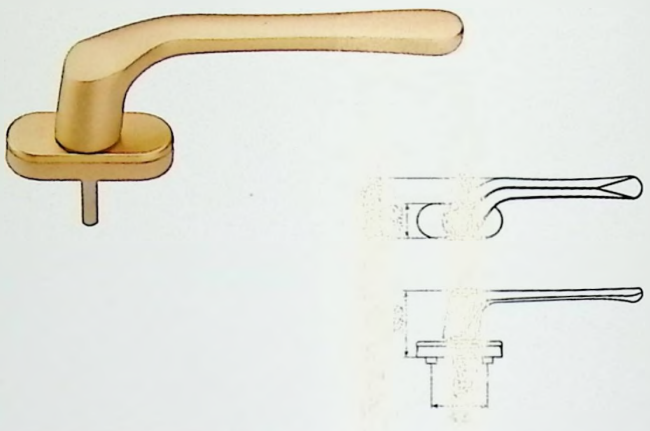


JS-SG8031
广式执手(方钢)
Cantonese style handle(Square steel) /氧化16/氧化25

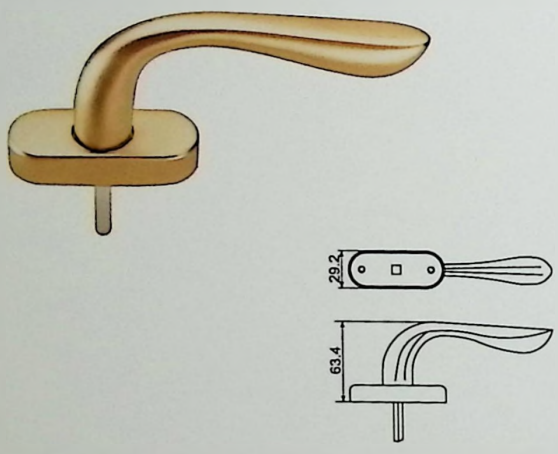


JS-SG8032
奔驰执手(方钢)
Benz handle (Square steel) /氧化30

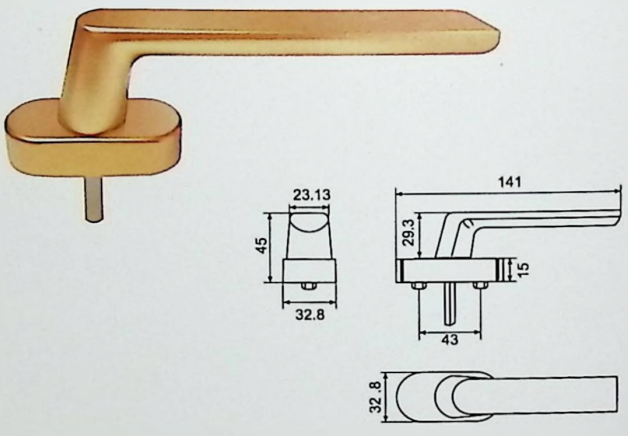

JS-SG8033
意式执手(方钢)
Italian style handle(Square steel) /氧化25

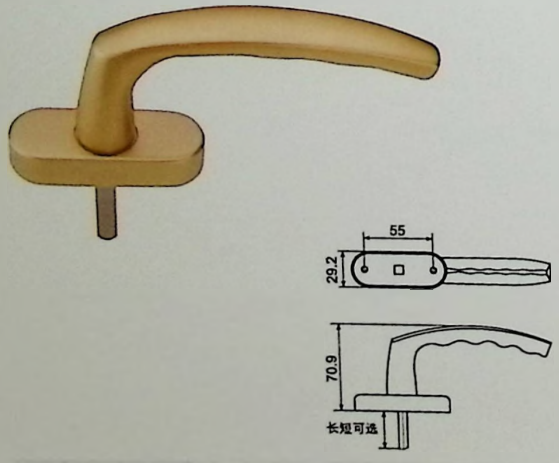


JS-SG8034
意式大座执手(方钢)
Italian style large base handle(Square steel) /氧化35

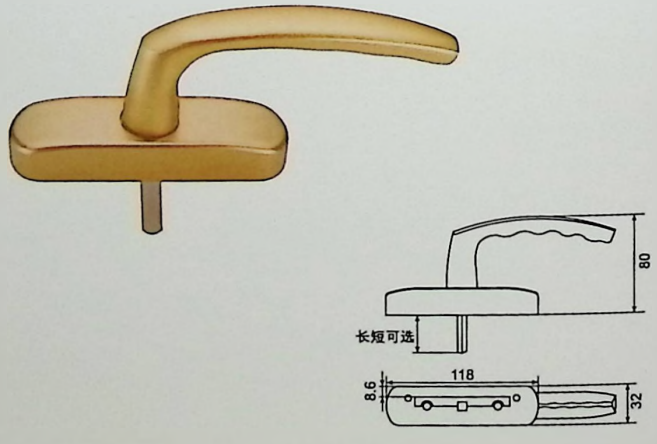


Http://www.xxxxx.com
E-mail:xxxxx@163.com


JS-SG8017
丹麦执手
Danish handle/氧化28

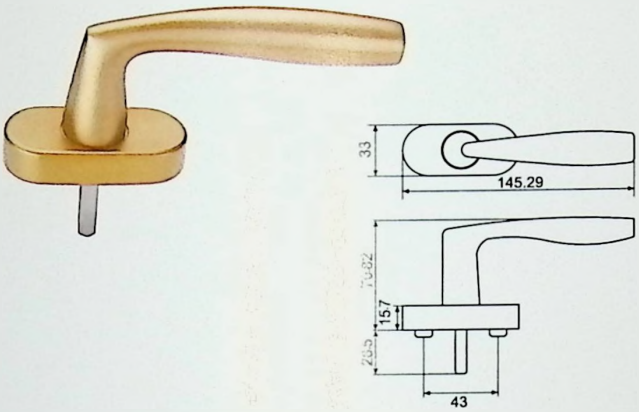


JS-SG8039
雅典执手
Athens handle /氧化28

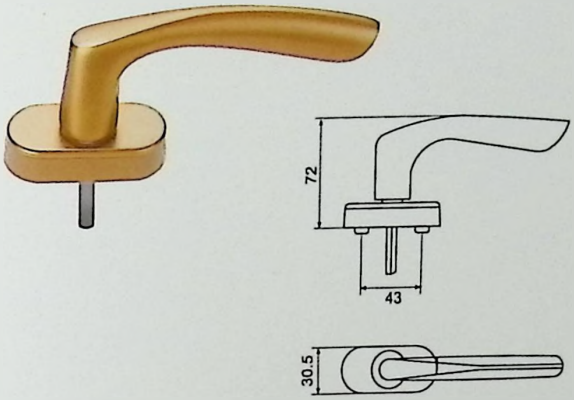


JS-SG8016
罗马执手
Roman handle /氧化28

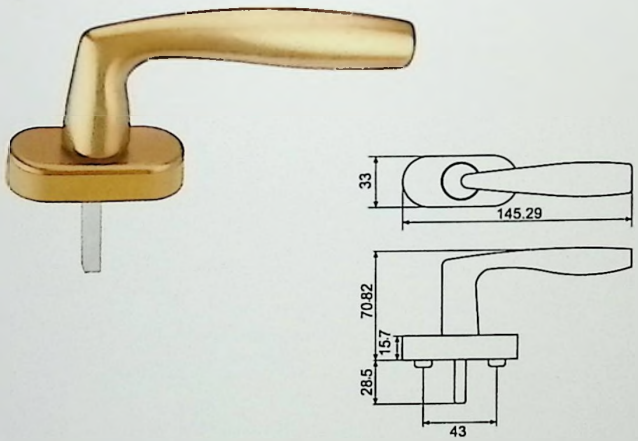


JS-SG8040
米兰执手
Milan handle /纯铜古铜110

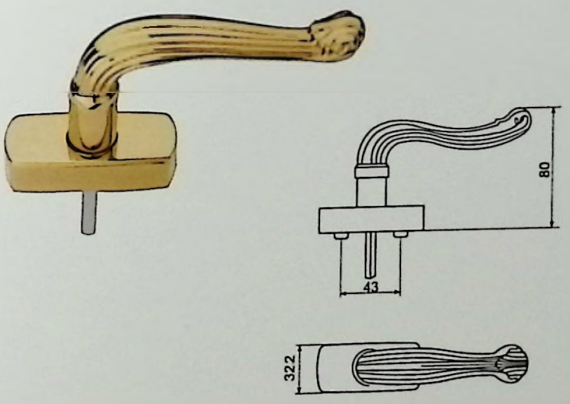

JS-SG8036
芬兰执手
Finland handle /纯铜古铜110

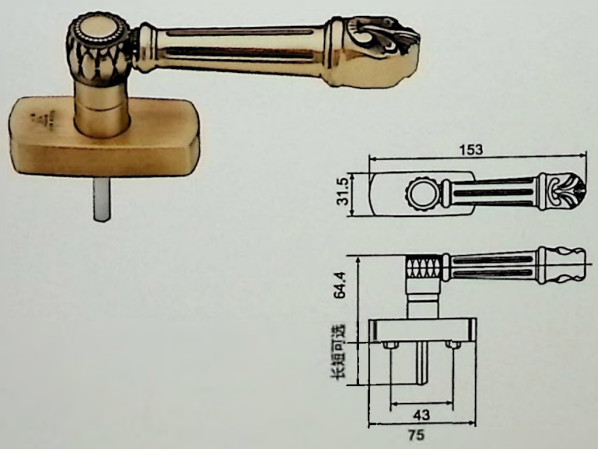


JS-SG8037
波兰执手
Poland handle /纯铜110

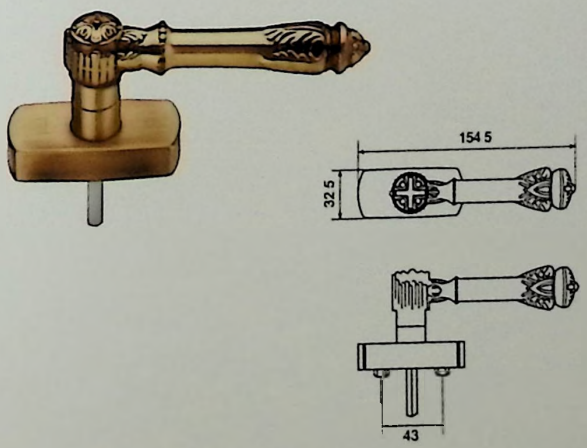


VARIOUS HANDLE

方钢执手


JS-SG8023
带保险弧形执手
Arc handle with security device /13

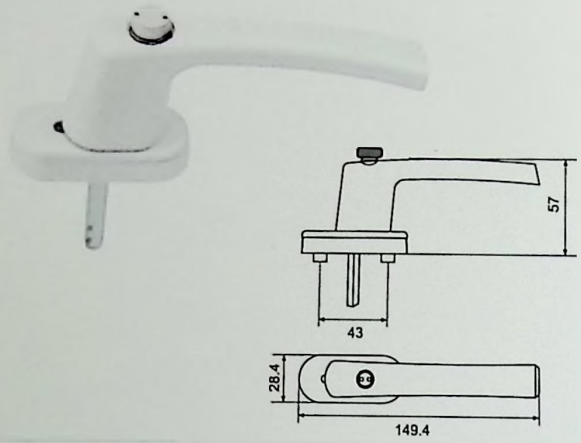


JS-SG8024
带钥匙弧形执手
Arc handle with key /15

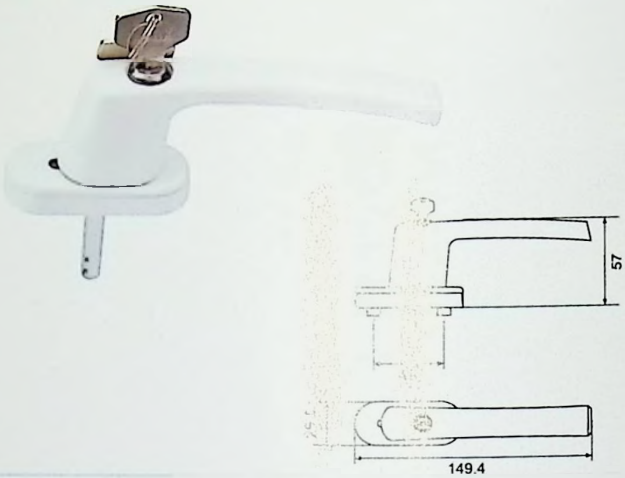


JS-SG8026
带锁直柄塑钢执手
Plastic steel handle with lock /18

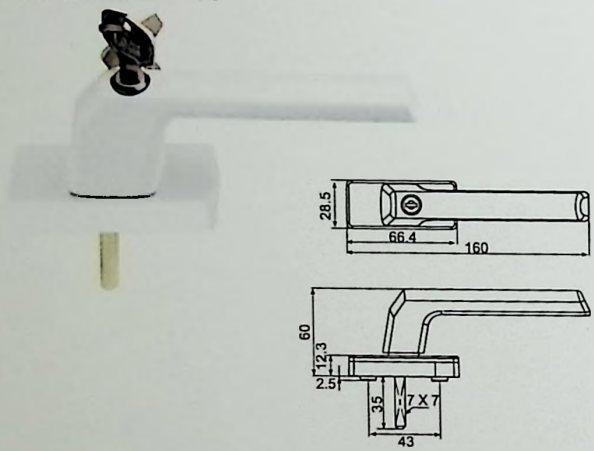


JS-SG8028
带保险直柄塑钢执手
Insurance plastic steel handle /16

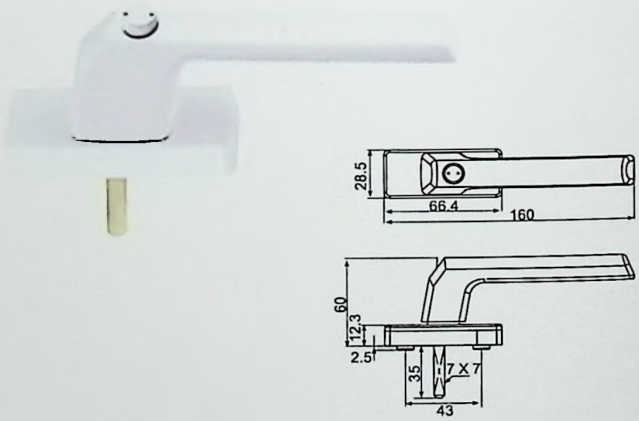


JS-SG8041
瑞士执手(方钢)
Swiss handle(Square steel) /14

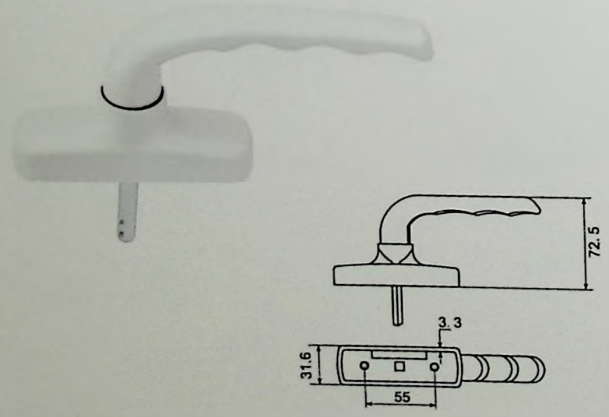


JS-SG8042
瑞典执手(方钢)
Swedish handle(Square steel) /14

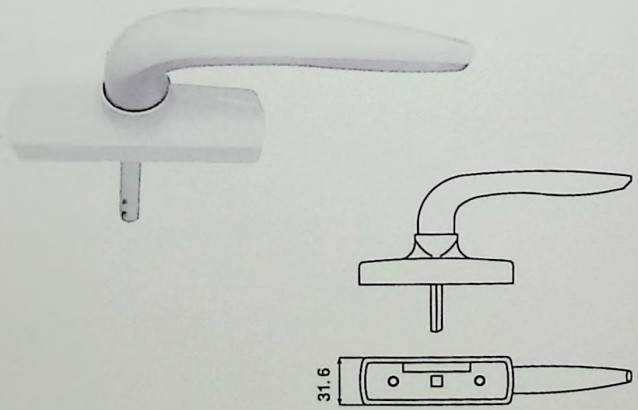



JS-SG8060
直柄对开执手(带锁带保险)
Straight folio lock handle
(with lock and with security device) /30

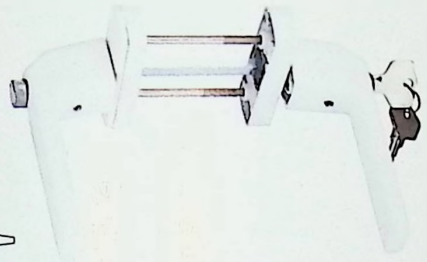





JS-SG8061
直柄大带锁对开执手
Large straight lock with folio handle /23






JS-SG8062
直柄对开执手
Straight folio handle /26

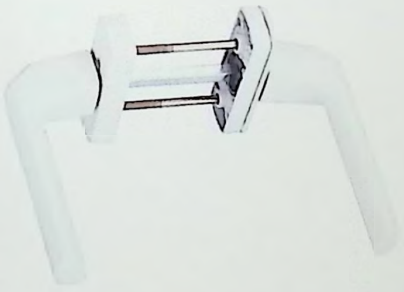




JS-SG8063
弧形对开执手
Arc split handle /22






JS-SG8064
弧形大带锁对开执手
Arc large split handle with lock /24





JS-SG8065
弧形对开执手(带锁带保险)
Arc split handle (with lock and with security device) /26







VARIOUS HANDLE

方钢执手


JS-SG8019
欧式塑钢执手
Europe plastic steel handle /12

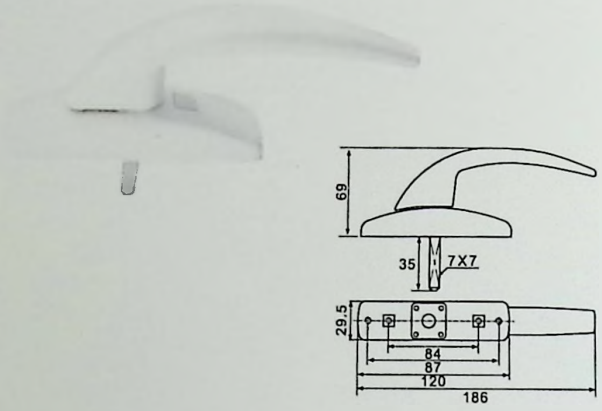


JS-SG8018
标准塑钢执手(铝柄塑座)
Standard plastic steel handle (Aluminum) /7.5

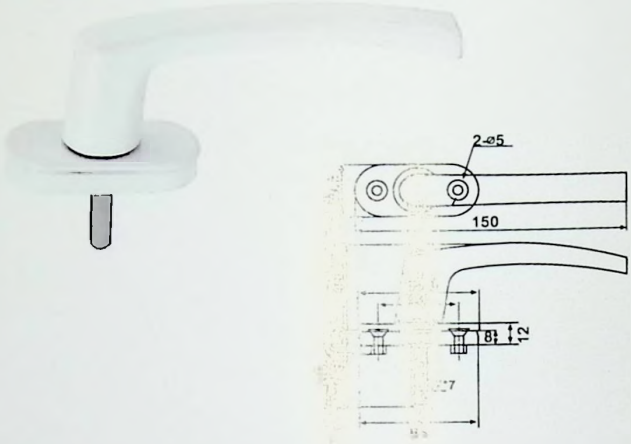


JS-SG8020
韩式塑钢执手
Korea plastic steel handle /11

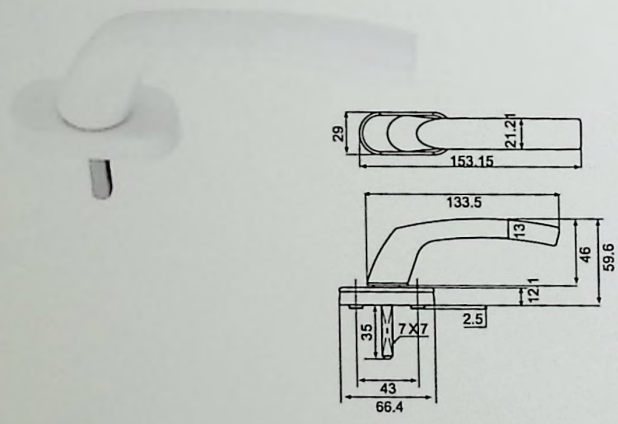


JS-SG8021
和谐执手
Harmony handle /11

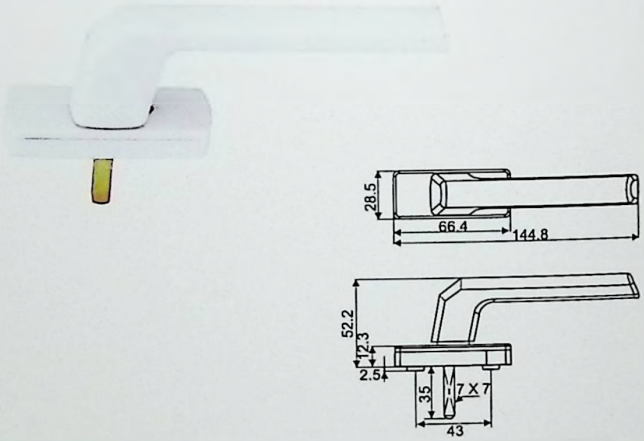


JS-SG8035
大众执手
Dazhong handle /面板22

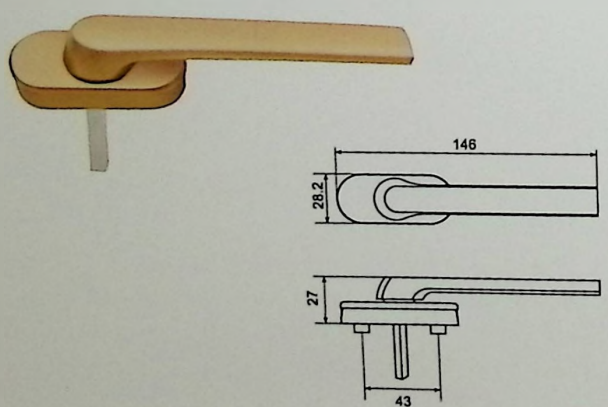


JS-SG8038
刀式执手 (分左右)
Knife type handle (including left and right parts) /面板25

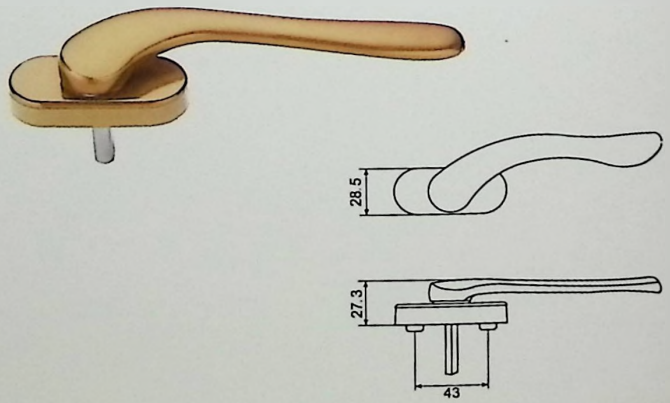


JS-SG8050
小隐形叉（带锁）
Small invisible fork
(with lock) 喷塑13/喷漆14.5




JS-SG8051
大隐形叉（带锁）
Large invisible fork
(with lock) 喷塑14/喷漆16

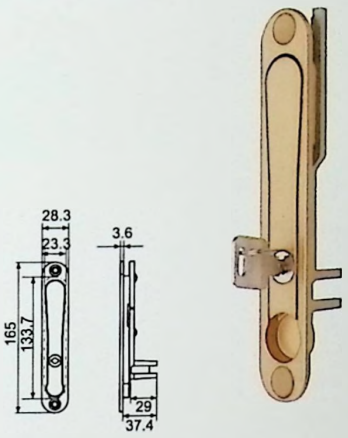


JS-SG8052
侧开执手（不分左右）
Lateral opening handle
(not left/right) 喷塑15/喷漆17

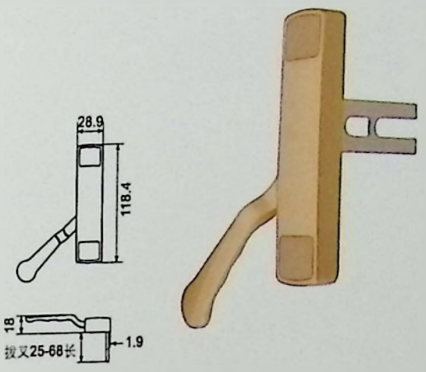


JS-T768
剑式隐形叉
Sword type invisible fork 喷塑20/喷漆22

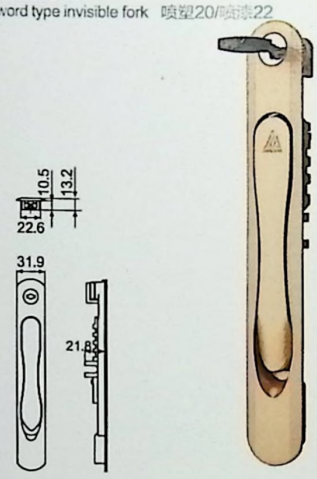


JS-SG8054
隐形执手(带锁)
Invisible handle (with lock) 喷塑13/喷漆15

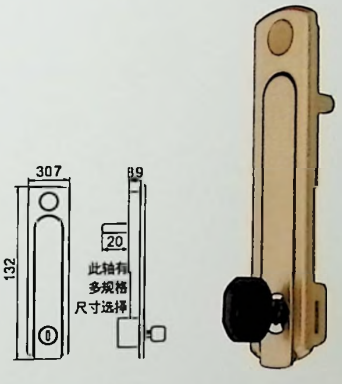


JS-SG8022
剑式执手
Sword handle 喷塑12/喷漆14

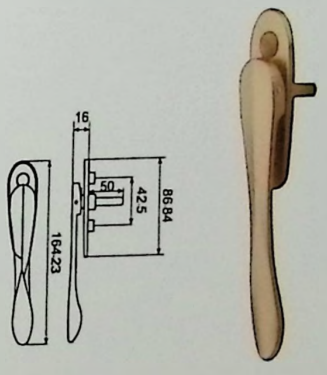


JS-SG8053
隐形执手
Invisible handle 喷塑12/喷漆14

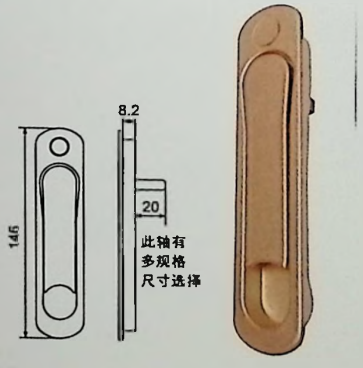

JS-T767
隐形内盒
Invisible inner box /8

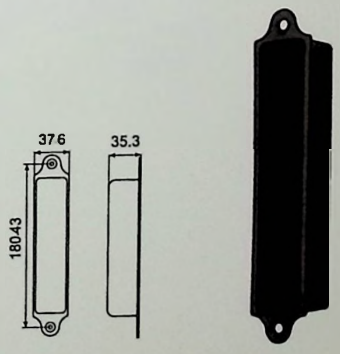


JS-T780
拉扣
Pull buckle /3.5




CRESCENT LOCK SERIES


月牙锁系列


JS-Y9201
双向月牙锁(铝)（不分左右）
Two-way crescent lock(aluminum) (no left and right) /4.5

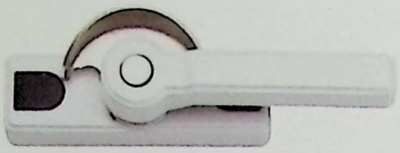





JS-Y9202
大方柄月牙锁(小半圆)
Big square shank crescent lock (small semi-circle) /7

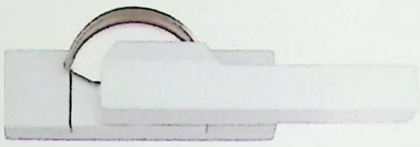





JS-Y9203
小把锁(锌)
Small lock (Zinc) /5

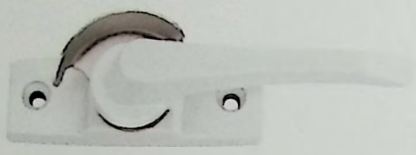




JS-Y9204
小方柄月牙锁(锌)
Small square shank crescent lock (zinc) /6.6

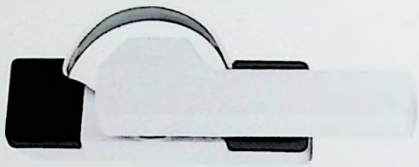




JS-Y9205
斜柄月牙锁(A)铝
Slanting handle crescent lock (A) aluminum /3.5







JS-Y9206
斜柄月牙锁(B)锌
Slanting handle crescent lock (B) zinc /5






JS-Y9207
龙山月牙锁(小半圆)
Longshan crescent lock (small semi-circle) /铝3.5 锌4.5



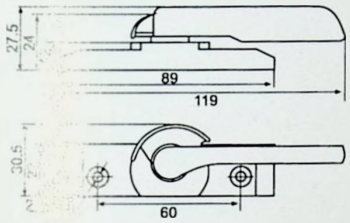


JS-Y9208
龙山月牙锁(大半圆)
Longshan crescent lock (big semi-circle) /铝4 锌5






JS-Y9209
长柄月牙锁(小半圆)
Long shank crescent lock (small semi circle) /6.6







JS-Y9210
短柄月牙锁(小半圆)
Short shank crescent lock (small semi circle) /6.5






JS-Y9211
长柄月牙锁(双向)
Long shank crescent lock (two-way) /7.2






JS-Y9212
推拉安全锁
Push & pull safety lock /20

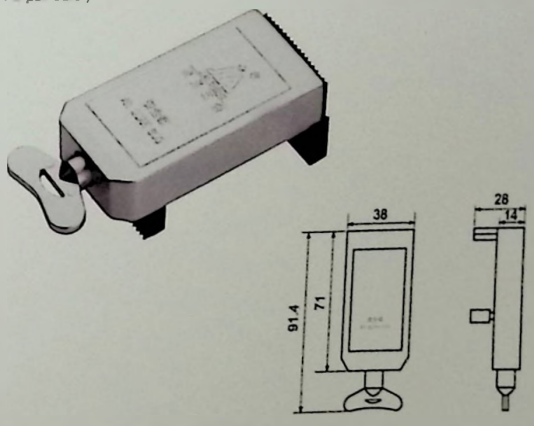


LATCH LOCK SERIES

各种锁勾


JS-SG901
中空勾
Hollow lock
/0.85







JS-SG902
中空勾
Hollow lock
/0.85






JS-SG903
中空勾
Hollow lock
/0.85






JS-SG904
长尾勾
Long tail hook
/0.42






JS-SG905
单拔勾
Single pull hook
/0.42






JS-SG906
单拔勾
Single pull hook
/0.42






JS-SG907
单拔勾
Single pull hook
/0.42






JS-SG908
单拔勾
Single pull hook
/0.42






JS-SG909
单拔勾
Single pull hook
/0.42






JS-SG910
单拔勾
Single pull hook
/0.42






JS-SG911
单拔勾
Single pull hook
/0.42






JS-SG912
单拔勾
Single pull hook
/0.42






JS-SG913
长尾勾
Long tail hook
/0.42





JS-SG914
长尾勾
Long tail hook
/0.42






JS-SG915
长尾勾
Long tail hook
/0.42




e)




JS-SG916
单拔勾
Single pull hook
/0.42






JS-SG917
单拔勾
Single pull hook
/0.42






JS-SG918
单拔勾
Single pull hook
/0.42






JS-SG919
塑钢勾
Plastic steel hook
/0.42






JS-SG920
塑钢勾
Plastic steel hook
/0.42






HARDWARE
HINGE SERIES
合页系列

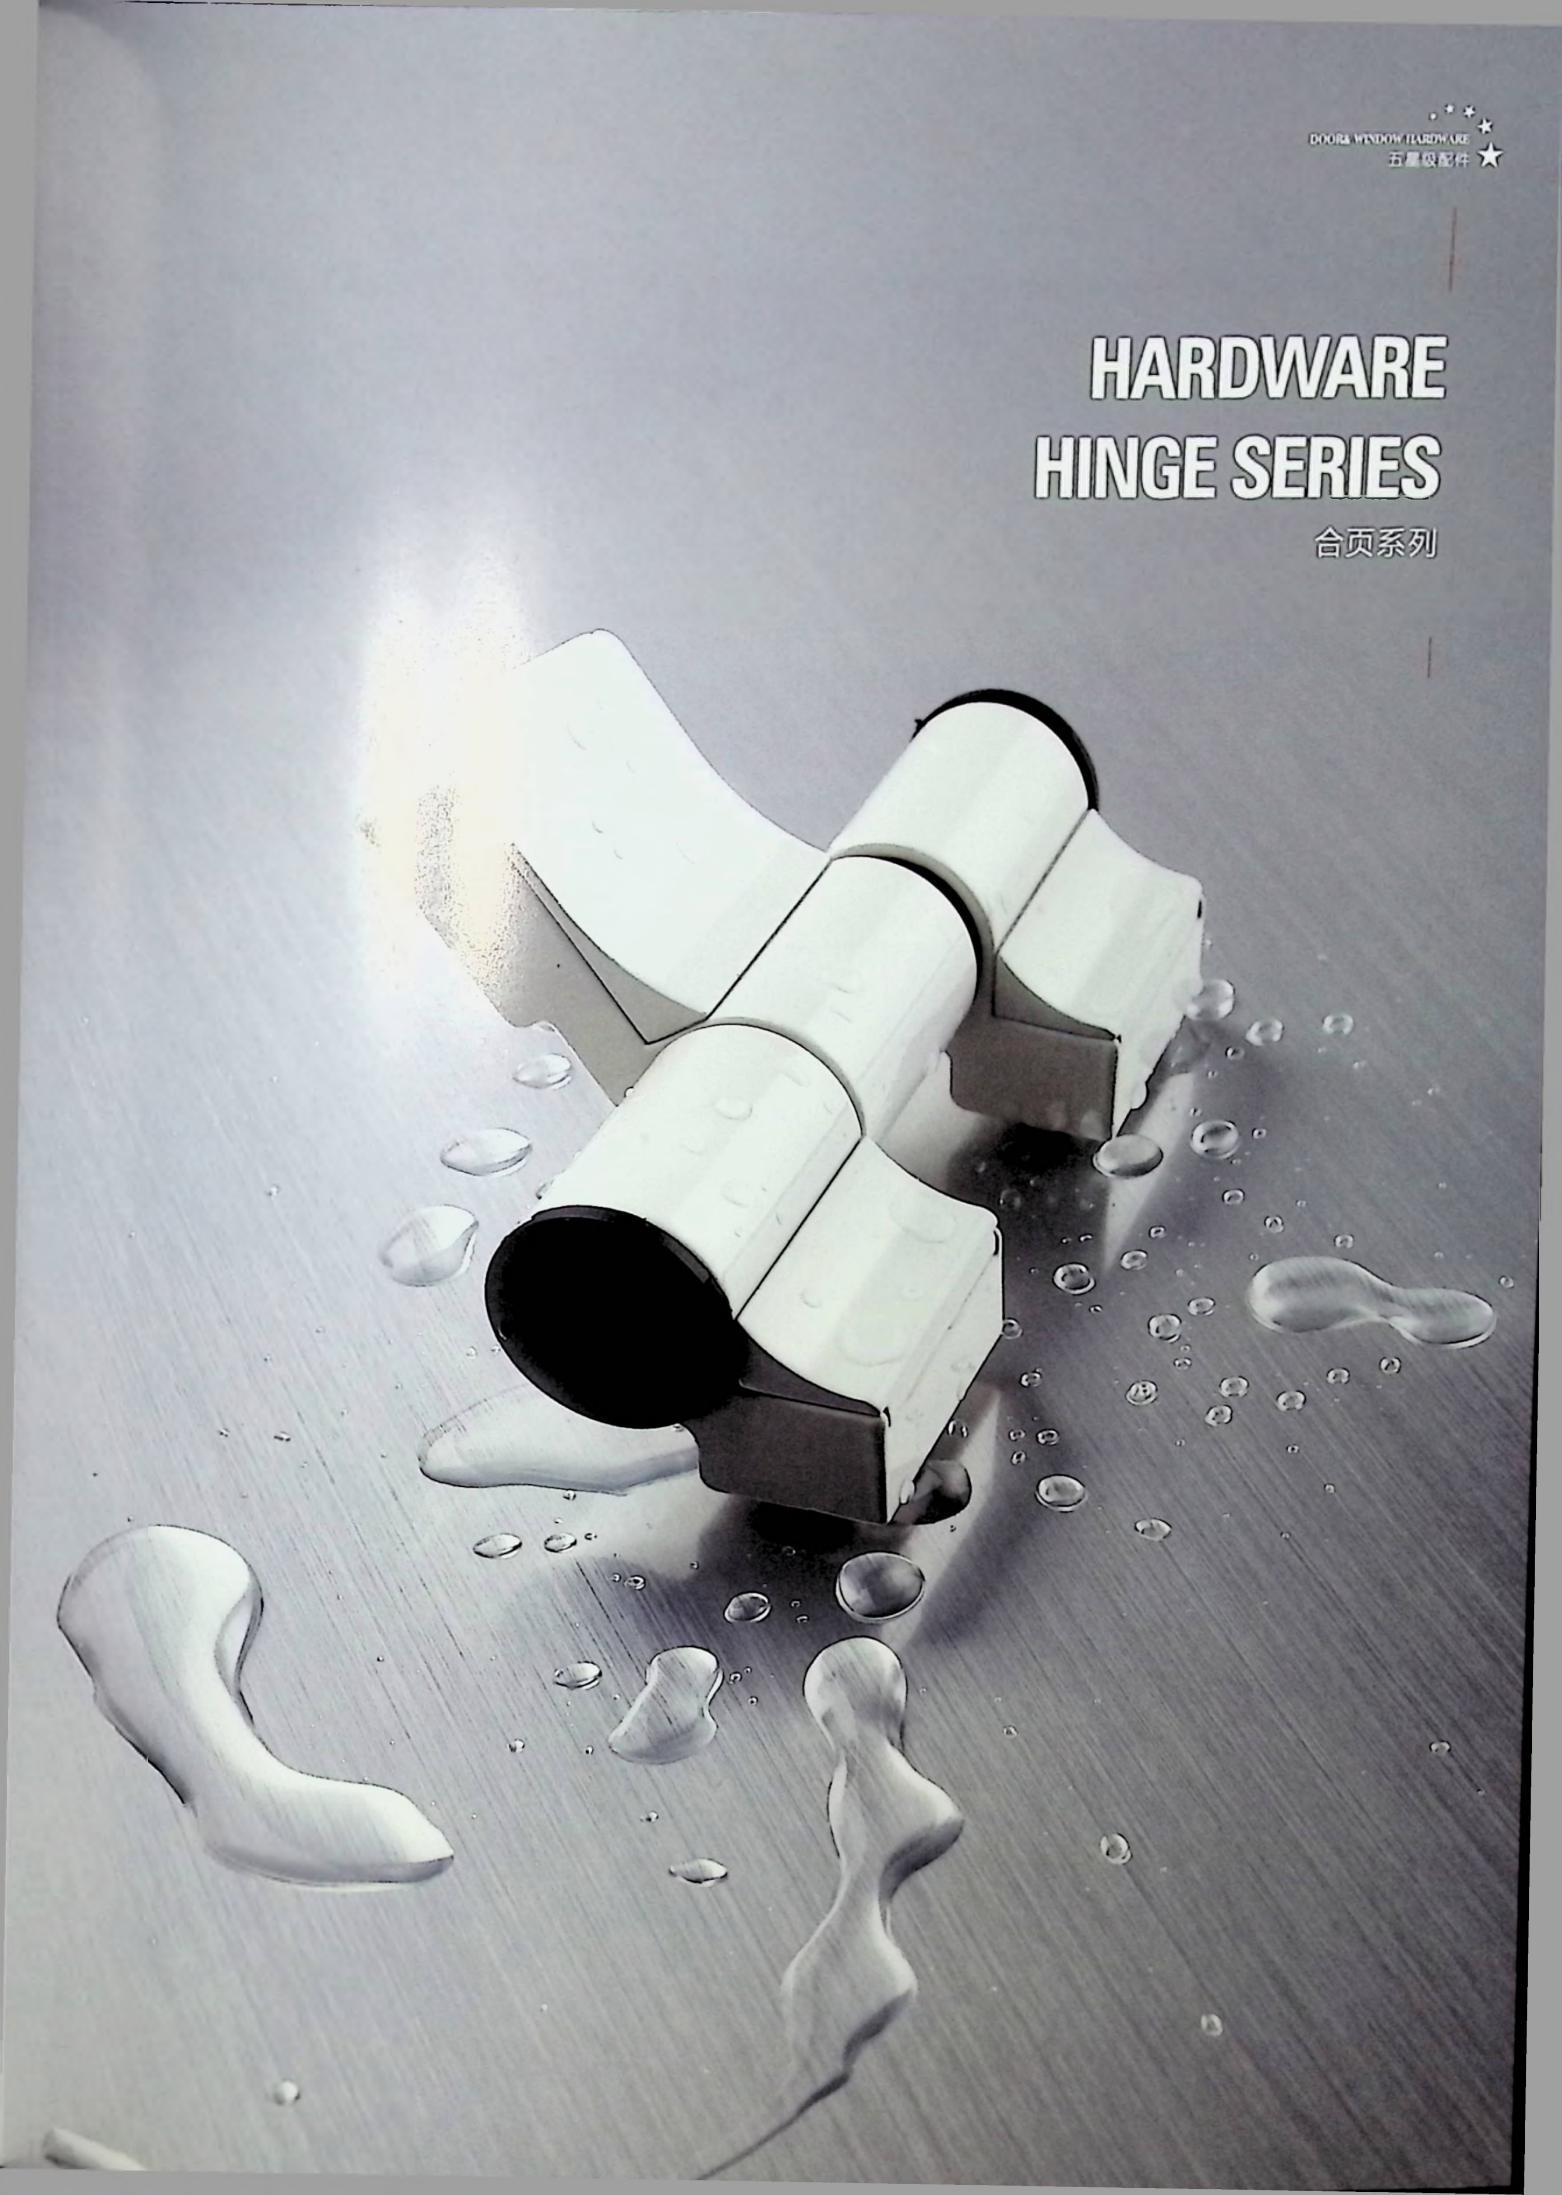



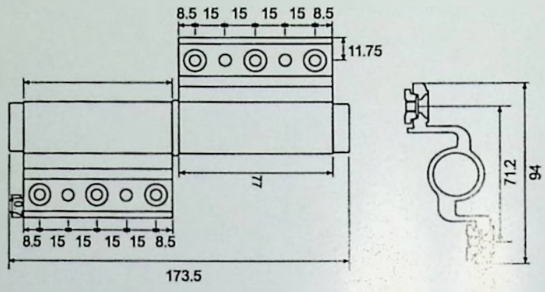


- 主要特点：主要适用于断桥铝材门，适用[illegible]门扇完全加工后再安装合页，无须先预设底板，即能快速更换合页，配合[illegible]装及维护更方便快捷。
- 功能介绍：安装后可根据需要调整闭门力度[illegible]门扇关闭到约10°时稍快加力入锁，可防冲击关门，可以起到电子锁，指[illegible]保护门扇功能。（可以调节复位、恢复出厂时状态，方便二次装拆）

JS-HY5700
液压合页
Door closing hydraulic hinge /150

- Mainly features: it is mainly used in the broken bridge aluminum doors. Using quick plate, which can Be door frame. Install hinge door after completely processing the door, without setting the base plate, Which can quickly replace the hinge, with the use of door adjustment plate and make the installation More convenient.
- Features After installing closing force and closing speed can be adjusted, close doors to about 10° forcing a little faster when the lock can be closed against shock, which can be functional as electronic lock, fingerprint lock, from the vibration damage and protect the function of the door leaf (can adjust the reset, restore non-functional state, easy to install and remove again).

JS-HY5701
欧标50大合页
European standard big hinge /15




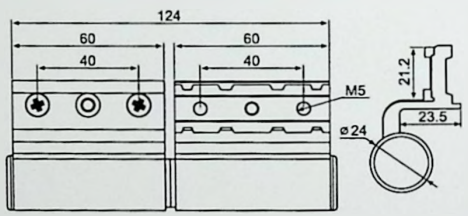


- 适用于框、扇型材标准20槽口平开门
- 合页承重为120公斤/对，具体承重能力与合页安装和型材有关
- 合页轴套偏芯可调

- Applicable to notch side-hung door with the frame and sash standard of 20
- The maximum loading of hinge is 120 kg pair and the hinge installation and materials can affect the specific loading ability.
- Hinge sleeve raised core can be adjusted.

JS-HY5702
50加长合页
50 lengthened hinge /15

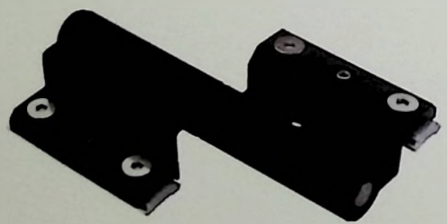

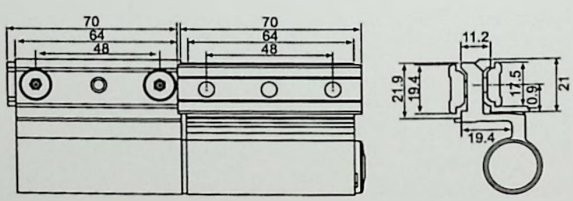

- 适用于框、扇型材标准20槽口平开门
- 合页承重为120公斤/对，具体承重能力与合页安装和型材有关
- 合页轴套偏芯可调

- Applicable to notch side-hung door with the frame and sash standard of 20
- The maximum loading of hinge is 120 kg pair and the hinge installation and materials can affect the specific loading ability.
- Hinge sleeve raised core can be adjusted.


JS-HY5703

45门合页

50 door hinge /20

- 适用于框、扇型材在同一平面相平的平开门
- 合页承重为110公斤/对，具体
- 承重能力与合页安装和型材有关
  合页轴套偏芯可调

- Applicable to the side-hung door whose frame and sash materials are at the same plane
- The maximum loading of hinge is 110 kg/pair and the hinge installation and materials can affect the specific loading ability.
- Hinge sleeve raised core can be adjusted

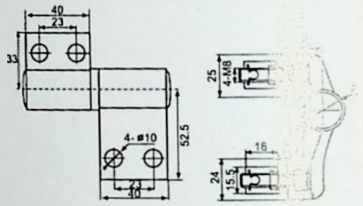





或单配螺丝
Separate equipped with bolt

JS-HY5704


三节45门合页

Three-section 45 door hinge /26

- 适用于框、扇型材在同一平面相平的平开门
- 合页承重为130公斤/对，具体承重能力与合页安装和型材有关
  合页轴套偏芯可调

- Applicable to the side-hung door whose frame and sash materials are at the same plane. The maximum loading of hinge is 130 kg/pair and the hinge installation and materials can
- affect the specific loading ability
- Hinge sleeve raised core can be adjusted



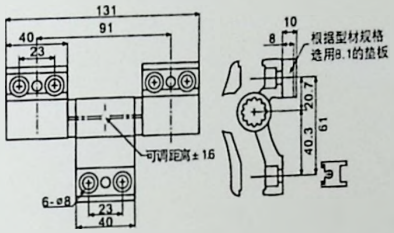



或单配螺丝
Separate equipped with bolt


JS-HY5746


50大三页合页

50 large three-piece hinge /28

- 适用于框、扇型材标准20槽口平开门
- 合页承重为140公斤/对，具体承重能力与合页安装和型材有关

- Applicable to notch side-hung door with the frame and sash standard of 20
- The maximum loading of hinge is 140 kg/pair and the hinge installation and materials can affect the specific loading ability.

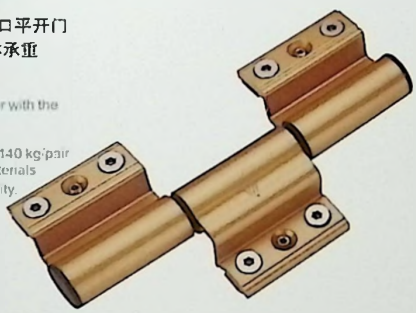

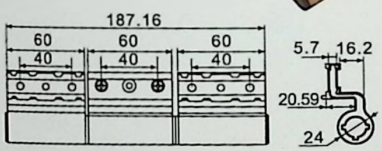


JS-HY5706


50-6合页

50-6 hinge /5.5

- 适用于无槽口平开窗
- 合页承重为40公斤/对，具体承重能力与合页安装和型材有关

- Applicable to notch-free side-hung window
- The maximum loading of hinge is 40 kg/pair and the hinge installation and materials can affect the specific loading ability



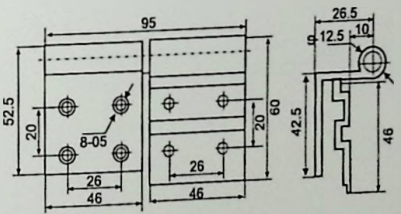

JS-HY5707


50-15断桥合页

50-5 bridge-cut-off hinge /6

- 适用于标准20槽口平开门窗
- 合页承重为40公斤/对，具体承重能力与合页安装和型材有关
- 合页轴套偏芯可调

- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 40 kg/pair and the hinge installation and materials can affect the specific loading ability.
- Hinge sleeve raised core can be adjusted



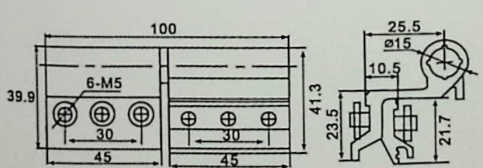

JS-HY5708


50-9门合页

50-9 door hinge /6.4

- 适用于无槽口平开窗
- 合页承重为50公斤/对，具体承重能力与合页安装和型材有关

- Applicable to notch-free side-hung window
- The maximum loading of hinge is 50 kg/pair and the hinge installation and materials can affect the specific loading ability




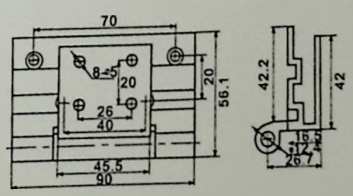

JS-HY5709
50-9A合页
50-9A hinge /6.7


- 适用于无槽口平开窗
- 合页承重为60公斤/对，具体承重能力与合页安装和型材有关
- Applicable to notch-free side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability






JS-HY5710
50-10平板合页
50-10 flat hinge /5.5

- 适用于无槽口平开窗
- 合页承重为30公斤/对，具体承重能力与合页安装和型材有关
- Applicable to notch-free side-hung window
- The maximum loading of hinge is 30 kg/pair and the hinge installation and materials can affect the specific loading ability.

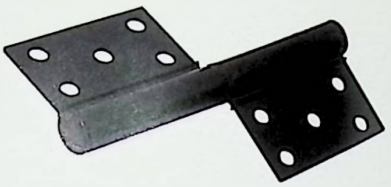


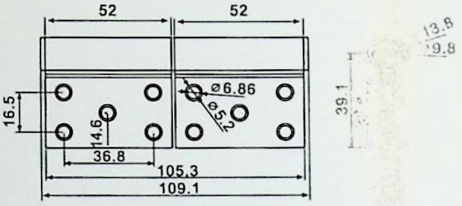

JS-HY5711
50-13合页
50-13 hinge /6

- 适用于标准20槽口平开门窗
- 合页承重为40公斤/对，具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 40 kg/pair and the hinge installation and materials can affect the specific loading ability.




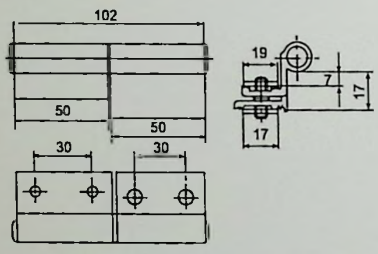

JS-HY5712
58B合页
58B hinge /6


- 适用于标准20槽口平开门窗
- 合页承重为60公斤/对，具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability.




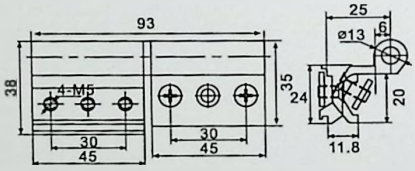

JS-HY5713
50-14三节合页
50-14 Three-section hinge /15


- 适用于标准20槽口平开门窗
- 合页承重为75公斤/对，具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 75 kg/pair and the hinge installation and materials can affect the specific loading ability.

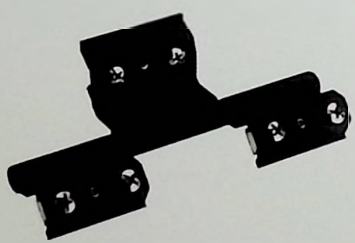


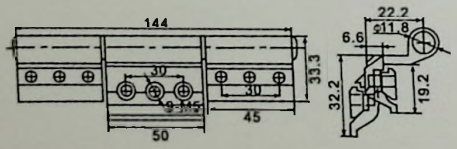

JS-HY5714
57E合页
57E hinge /6

- 搭接量12cm
- 适用于标准20槽口平开门窗
- 合页承重为60公斤/对，具体承重能力与合页安装和型材有关
- Lapping amount 12cm
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability.



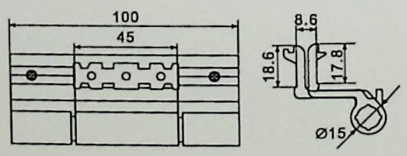

JS-HY5715


50-16断桥合页

50-16 bridge-cut- off hinge /6.7

- 适用于无槽口平开窗
- 合页承重为60公斤/对，具体承重能力与合页安装和型材有关

- Applicable to notch-free side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability



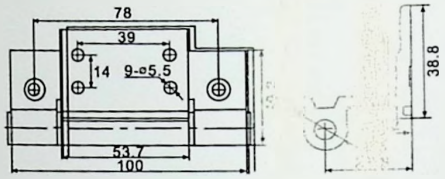

JS-HY5716


80A 合页

80A hinge /6.7

- 适用于无槽口平开窗
- 合页承重为40公斤/对，具体承重能力与合页安装和型材有关

- Applicable to notch-free side-hung window
- The maximum loading of hinge is 40 kg/pair and the hinge installation and materials can affect the specific loading ability



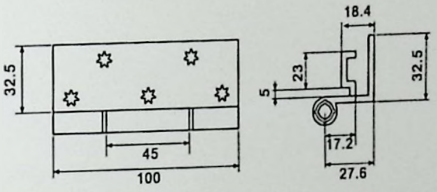

JS-HY5717


57-1合页

57-1 hinge /6.7

- 适用于标准20槽口平开门窗
- 合页承重为60公斤/对，具体承重能力与合页安装和型材有关

- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability



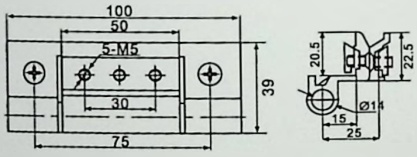


JS-HY5718


57-1加长合页

57-1 lengthened hinge /10.5

- 适用于标准20槽口平开门窗
- 合页承重为75公斤/对，具体承重能力与合页安装和型材有关

- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 75 kg/pair and the hinge installation and materials can affect the specific loading ability



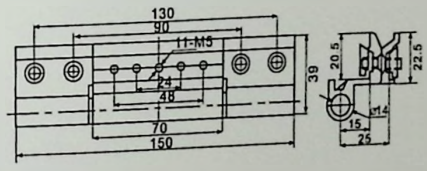

JS-HY5719


57-2合页

57-2 hinge /6.7

- 适用于标准20槽口平开门窗
- 合页承重为60公斤/对，具体承重能力与合页安装和型材有关

- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability



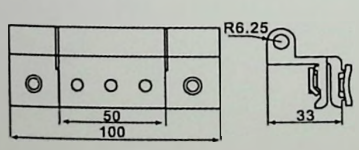

JS-HY5720


57-5合页

57-5 hinge /10.5

- 适用于标准20槽口平开门窗
- 合页承重为75公斤/对，具体承重能力与合页安装和型材有关

- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 75 kg/pair and the hinge installation and materials can affect the specific loading ability




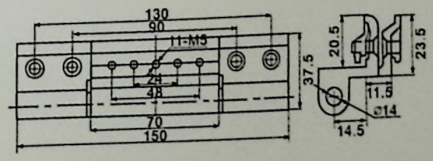

JS-HY5721
57-3合页
57-3 hinge /6.7

- 适用于标准20槽口平开门窗
- 合页承重为60公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability.




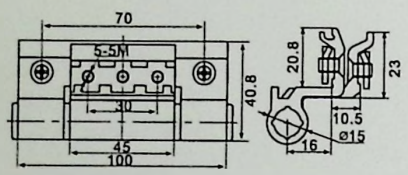

JS-HY5722
57-3加长合页（不锈钢压板）
57-3 lengthened hinge (stainless steel plate pinch) /10.5

- 适用于标准20槽口平开门窗
- 合页承重为80公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 80 kg/pair and the hinge installation and materials can affect the specific loading ability.




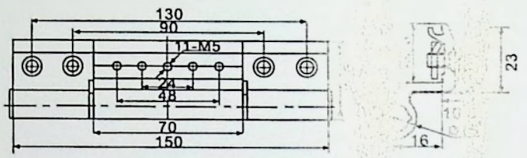

JS-HY5723
57-4合页SJ
57-4 hinge SJ /6


- 适用于标准20槽口平开门窗
- 合页承重为40公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 40 kg pair and the hinge installation and materials can affect the specific loading ability.




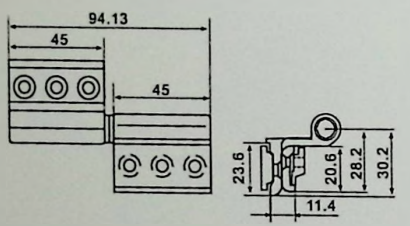

JS-HY5724
57-6合页JL
57-6 hinge JL /6.7


- 适用于标准20槽口平开门窗
- 合页承重为60公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability






JS-HY5725
57-7 合页
57-7 hinge /6.7


- 适用于标准20槽口平开门窗
- 合页承重为60公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability




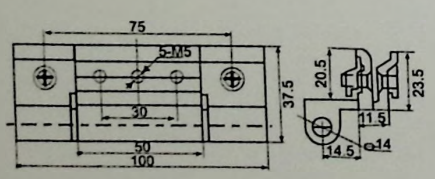

JS-HY5726
57-8合页NT
57-8 hinge NT /6.7

- 适用于标准20槽口平开门窗
- 合页承重为60公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability



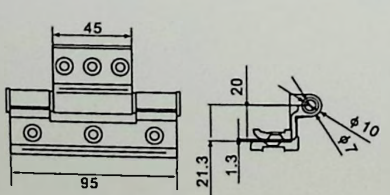

HINGE SERIES

合页系列

JS-HY5733


80合页

80 hinge /6.7

- 适用于无槽口平开窗
- 合页承重为50公斤/对，具体承重能力与合页安装和型材有关

- Applicable to notch-free side-hung window
- The maximum loading of hinge is 50 kg/pair and the hinge installation and materials can affect the specific loading ability.



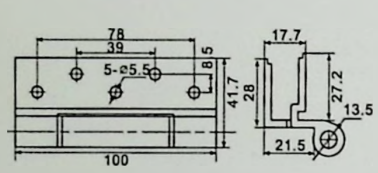


JS-HY5738


83合页

83 hinge /6.7

- 适用于无槽口平开窗
- 合页承重为50公斤/对，具体承重能力与合页安装和型材有关

- Applicable to notch-free side-hung window
- The maximum loading of hinge is 50 kg/pair and the hinge installation and materials can affect the specific loading ability.



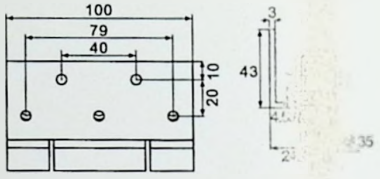


JS-HY5735


纱窗合页(1)

Window screen hinge(1) /4

- 适用于无槽口平开窗
- 合页承重为30公斤/对，具体承重能力与合页安装和型材有关

- Applicable to notch-free side-hung window
- The maximum loading of hinge is 30 kg/pair and the hinge installation and materials can affect the specific loading ability.



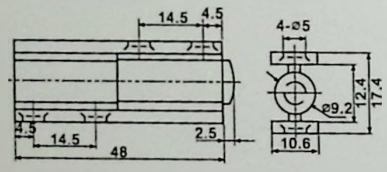

JS-HY5737


纱窗合页

window screen hinge /3.5

- 适用于无槽口平开窗
- 合页承重为20公斤/对，具体承重能力与合页安装和型材有关

- Applicable to notch-free side-hung window
- The maximum loading of hinge is 20 kg/pair and the hinge installation and materials can affect the specific loading ability.






JS-HY5739


超强合页

Ultra-strong hinge /7

- 适用于标准20槽口平开门窗
- 合页承重为60公斤/对，具体承重能力与合页安装和型材有关

- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability.






JS-HY5740


57-9 铝木合页


57-9 aluminum-wood hinge /7.5

- 适用于标准20槽口平开门窗
- 合页承重为60公斤/对，具体承重能力与合页安装和型材有关

- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 60 kg/pair and the hinge installation and materials can affect the specific loading ability.









http://www.xgsw.com
E-mail:xgsw@163.com

JS-HY5741
521合页
521 hinge /5.5


- 适用于标准20槽口平开门窗
- 合页承重为40公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 40 kg/pair and the hinge installation and materials can affect the specific loading ability.

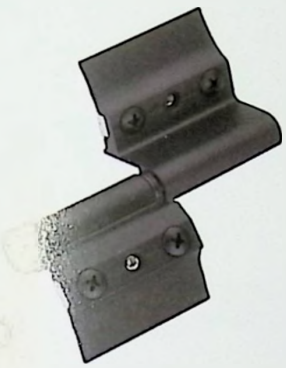


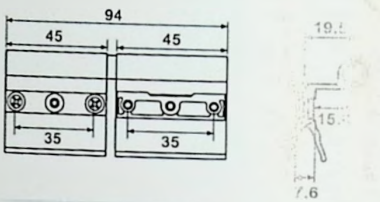

JS-HY5742
522合页
522 hinge /5.5

- 适用于标准20槽口平开门窗
- 合页承重为40公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 40 kg/pair and the hinge installation and materials can affect the specific loading ability.




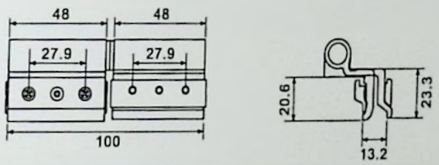

JS-HY5743
523合页
523 hinge /5.5


- 适用于标准20槽口平开门窗
- 合页承重为40公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 40 kg/pair and the hinge installation and materials can affect the specific loading ability.




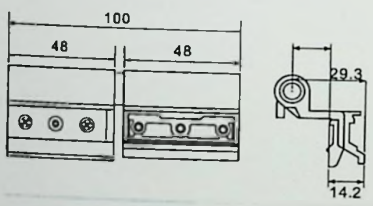

JS-HY5744
38合页
38 hinge /5.5

- 适用于无槽口平开窗
- 合页承重为40公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to notch-free side-hung window
- The maximum loading of hinge is 40 kg/pair and the hinge installation and materials can affect the specific loading ability.




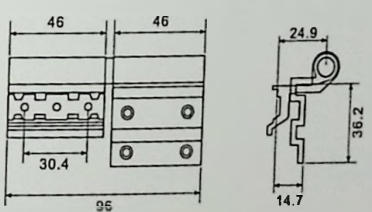

JS-HY5747
55/65/70双外开合页
55 65 70 double outward opening hinge 锁臂13/锁臂17


- 适用于框、扇型材标准20槽口平开门
- 合页承重为70公斤/对
  具体承重能力与合页安装和型材有关
- 合页轴套偏芯可调
- Applicable to notch side-hung door with the frame and sash standard of 20
- The maximum loading of hinge is 70 kg/pair and the hinge installation and materials can affect the specific loading ability.
- Hinge sleeve raised core can be adjusted.




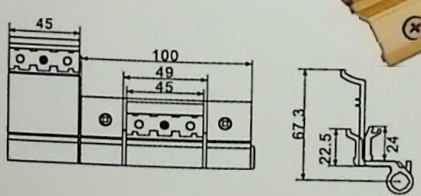

JS-HY5705
50-5合页
50-5 hinge /5.5

- 适用于无槽口平开窗
- 合页承重为40公斤/对，
  具体承重能力与合页安装和型材有关
- Applicable to notch-free side-hung window
- The maximum loading of hinge is 40 kg/pair and the hinge installation and materials can affect the specific loading ability.





JS-FC3033
二连杆(定点式)
2-links bar (fixed-point type) /10

材质:304
规格:6/8/10/12/14/寸
底槽宽:13.5/18mm


Material:304
Specification:6/8/10/12/14/寸
Bottom widths:13.5/18mm



JS-FC3035
二连杆(风撑)
2-links bar(wind bracing) /202:3.8 304:6

材质:202/304
规格:6/8/10/12/14/寸
底槽宽:13.5/18mm

Material:202/304
Specification:6/8/10/12/14/寸
Bottom widths:13.5/18mm

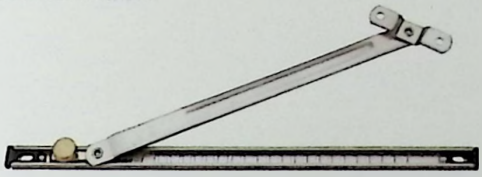

JS-FC3036
欧式风撑
European style wind bracing /202:6.5 304:8.5

材质:202/304
规格:6/8/10/12/14/寸
适用:欧标槽（不锈钢）


Material:202/304
Specification:6/8/10/12/14/寸
Suitable for Europe slot (stainless steel)



JS-FC3037
塑钢二连杆(风撑)
Plastic steel two-link rod (wind bracing) /202:4 304:6

材质:202/304
规格:6/8/10/12寸
底槽宽:18mm


Material:202/304
Specification:6/8/10/12寸
Bottom width:18mm

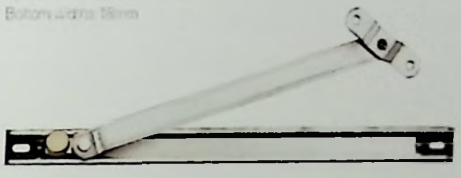

JS-FC3038
伸缩杆
Expansion link /10寸:16

材质:304
规格:6/8/10/12/14/寸
底槽宽:22mm


Material:304
Specification:6/8/10/12/14/寸
Bottom width:22mm



JS-FC3039
伸缩风撑
Telescopic wind bracing /16


材质:304
规格:6/8/10/12/14/寸
适用:欧标槽（不锈钢）


Material:304
Specification:6/8/10/12/14/寸
Suitable for Europe slot (stainless steel)



(分左右) Left and right

JS-HC3033 平开四连杆(13.5槽)
Flat open four link (13.5 rebate) /1.6

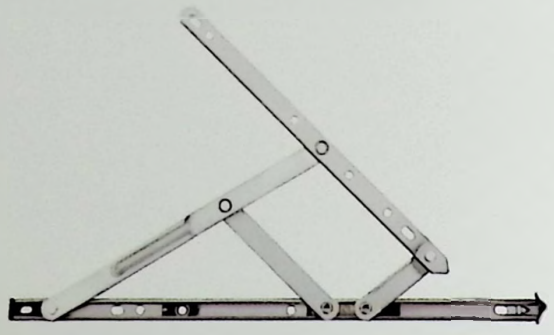

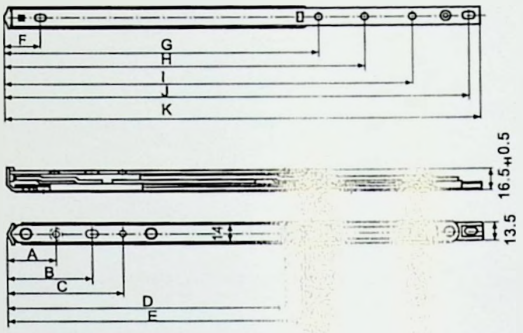



适用范围：平开窗　　Suitable: Casement Window
表面处理：本色　　Finish:Natural
主要材质：不锈钢　　Material :Stainless steel

安装尺寸 / Main: telescopic boom and sliding support　　（单位Unit:mm）　技术性能 / Technical function

规格	A	B	C	D	E	F	G	H	I	J	K	窗最高(mm) Window max height	窗最宽(mm) Window max width	窗最重(kg) Window max weight	开启角度 Opening angle	价格 Price
10	37	60		173	186	28	196			248	256	1000	400	14	90°	15
12	37	65		191	204	28	212		256	298	306	1100	500	17	90°	17
14	37	65	88	210	223	28	237	270	306	348	356	1200	600	20	90°	19.5
16	37	65	107	229	242	28	262	306	356	398	406	1500	600	23	90°	22.5

JS-HC3031 平开四连杆(22槽)
Flat open four link (22 rebate) /1.8

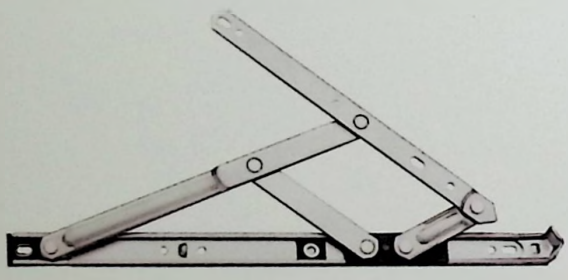


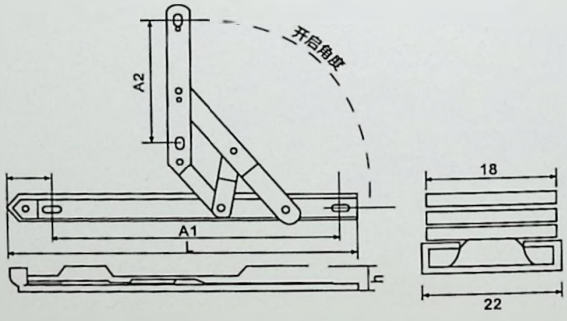


安装尺寸 / Main: telescopic boom and sliding support　　（单位Unit:mm）　技术性能 / Technical function

规格	A	B	C	D	E	F	G	H	I	J	K	L	M	N	窗最高(mm) Window max height	窗最宽(mm) Window max width	窗最重(kg) Window max weight	开启角度 Opening angle	价格 Price
10"	39	57			183	196	32			203			250	258	1300	400	18	90°	18
12"	39	63			202	215	32	156	220	246			300	308	1400	500	22	45/90°	20
14"	39	63	90		219	232	32	162	237	263		303	350	358	1500	600	26	45/90°	22.5
16"	39	63	10		238	251	32	171	262	288		353	400	408	1600	700	30	45/90°	25
18"	39	63	128		257	270	32	179	287	313		403	450	458	1700	800	35	45/90°	28

JS-HC3034 上悬四连杆（13.5槽）
Upper suspension four-linkage bar (13.5 rebate) /1.6

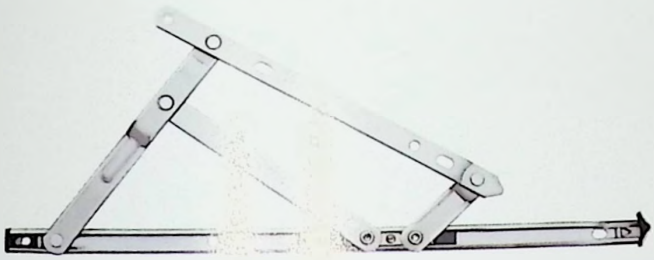

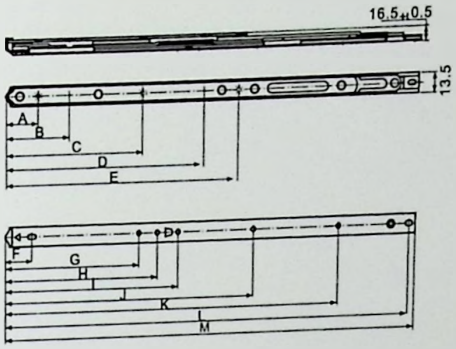

适用范围：上悬窗　Suitable: TOP Hung Window
表面处理：本色　Finish:Natural
主要材质：不锈钢　Material :Stainless stee

安装尺寸 / Main: telescopic boom and sliding support


规格 Specification	A	B	C	D	E	F	G	H	I	J	K	L	M
10"	39	77			141	32			178		203	250	258
12"	39	77		127	169	32	174	194	220		253	300	308
14"	39	77		155	197	32	183	205	231		303	350	358
16"	39	77		185	227	32	172	194	220		353	400	408
18"	39	77		215	257	32	180	205	231	278	403	450	458
20"	39	77	168	245	287	32	165	188	214	308	413	500	508
24"	39	77	212	305	347	32	174	202	228	368	493	600	608

技术性能 / Technical function

窗重 (kg) Window max. weight	窗宽 (mm) Window max. width	窗高 (mm) Window max. height	开启角度 Opening angle	价格 Price
25	1000	650	35°	15
33	1100	800	30/35°	17
38	1200	1000	30/35°	19.5
47	1300	1200	25/30°	22.5
58	1400	1400	25/30°	27
70	1500	1600	20/25°	31
85	1500	1800	20/25°	35

JS-HC3032上悬四连杆(22槽)
Upper suspension four-linkage bar (22 rebate) /1.8



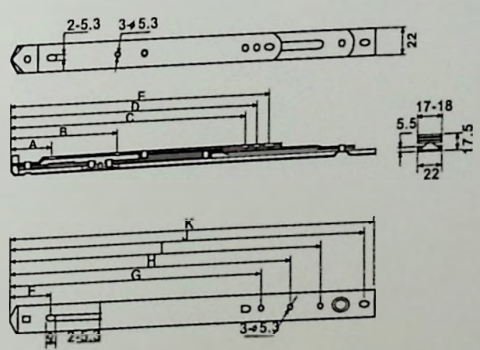

安装尺寸 / Main: telescopic boom and sliding support

规格 Specification	A	B	C	D	E	F	G	H	I	J	K	L	M
10"	39	77			141	32			178		203	250	258
12"	39	77		127	169	32	174	194	220		253	300	308
14"	39	77		155	197	32	183	205	231		303	350	358
16"	39	77		185	227	32	172	194	220		353	400	408
18"	39	77		215	257	32	180	205	231	278	403	450	458
20"	39	77	168	245	287	32	165	188	214	308	413	500	508
24"	39	77	212	305	347	32	174	202	228	368	493	600	608

技术性能 / Technical function

窗重 (kg) Window max. weight	窗宽 (mm) Window max. width	窗高 (mm) Window max. height	开启角度 Opening angle	价格 Price
20	1000	650	35°	18
30	1100	800	30/35°	20
40	1200	1000	30/35°	22.5
60	1300	1200	25/30°	25
80	1400	1400	25/30°	28
90	1500	1600	20/25°	31
100	1500	1800	20/25°	35

180隐形铰链 180 concealed hinge 铰链56/盖板70

专利产品 PATENT PRODUCT

JS-YX180

此铰链适用于欧标20槽，
不分左右 (开启180°)

This hinge is applied to Europe 20 slot,
not around (opening 180°)
Hinge divided into left and right



一、


- **产品特点\P1.锌合金、不锈钢材质，耐腐蚀性能高，经久耐用。**
- **隐藏式结构，安装后，内饰面美观**
- **夹持式安装方式，安装简单、方便，连接牢固可靠。**
- **三维可调，调整便捷。**
- **摩擦式运动方式，使用时安全性高\P6.有效提高门窗整体气密、水密性。**


- Character: zinc alloy, stainless steel material, high corrosion resistance, durable service
- Hidden structure, nice internal decoration after installation
- Clip hold type installation manner, simple and convenient installation, solid and reliable connection
- D adjustable, convenient adjustment
- Friction type motion mode, high safety at using. \P6. Effectively improve air and water tightness for door and window


二、使用范围\P180°隐形铰链

- **适用于欧标20槽口内、外平开型材**
- **安装过程中不分左右**
- **轻型承重为：40KG**
- **加重型承重为：70GK（要配防下滑不锈钢杆子）**

- Application range:P180 hidden hinge
- Applied to Europe 20 grooved internal & external profile
- No around during the course of installation
- Light bearing: 40 Kg
- Heavy bearing: 70GK (match anti sliding stainless steel rod)

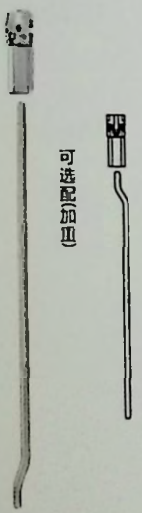

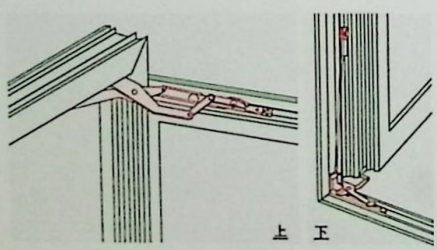

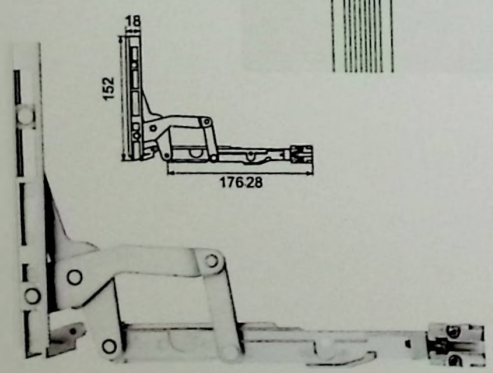



90隐形铰链 90 concealed hinge 铰45


JS-YX90

此铰链适用于欧标20槽，
有左右之分 (开启90°)

This hinge is applied to Europe 20 slot,
not around (opening 90°)
Hinge divided into left and right

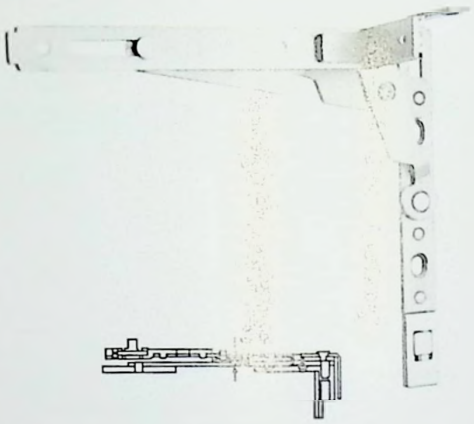



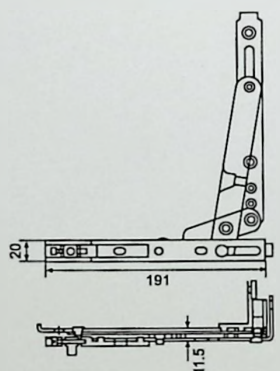

- **适用于标准20槽口平开门窗**
- **合页承重为70公斤/对，**
- **具体承重能力与合页安装和型材有关**
- **合页分左右**


- Applicable to standard 20 notch side-hung window
- The maximum loading of hinge is 70 kg/pair and the hinge installation and materials can affect the specific loading ability.
- Hinge divided into left and right



INVISIBLE HINGE


铰链系列

快装隐形铰链
JS-YX88
Quick installed invisible hinge /30

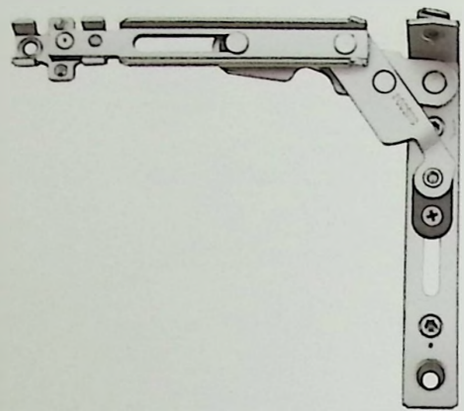


- 欧式隐藏铰链B型，分普通窗扇款和纱窗款
- 普通窗扇款的承重为65KG，纱窗款承重为35KG
- 拖片悬转卡槽式设计能有效提升安装快捷度并有效提升一定的沉重力
- 可调塑料拖片，可用工具调节窗扇开启力度大小
- 纯304#不锈钢材质具有强耐腐蚀性，适用于常规各种场所

- European-style hidden hinge b-type, divided into ordinary window sash and window
- screenThe weight of ordinary window sash is 65KG, and that of window screen is 35KGThe
- design of towed card slot can effectively improve the installation speed and increase the
- heavy forceAdjustable plastic drag sheet can be used to adjust the opening strength of
- window fanPure 304# stainless steel has strong corrosion resistance and is suitable for various regular places

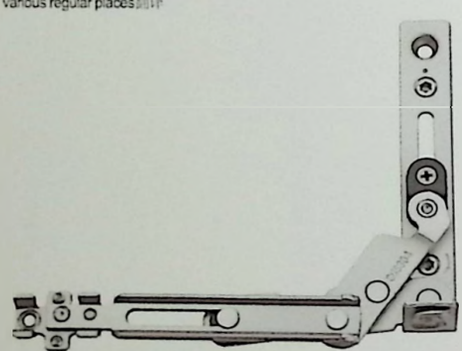

快装隐形内倒铰链
JS-YX89
Quick installed invisible horizontal pivoting window hinge /70




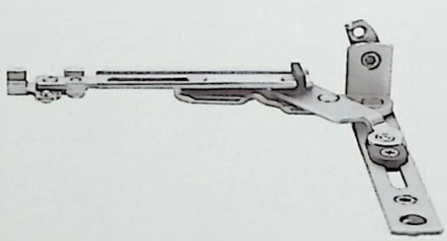






JS-FZ901
欧标槽坠落器
Europa grooved anti-falling device /11

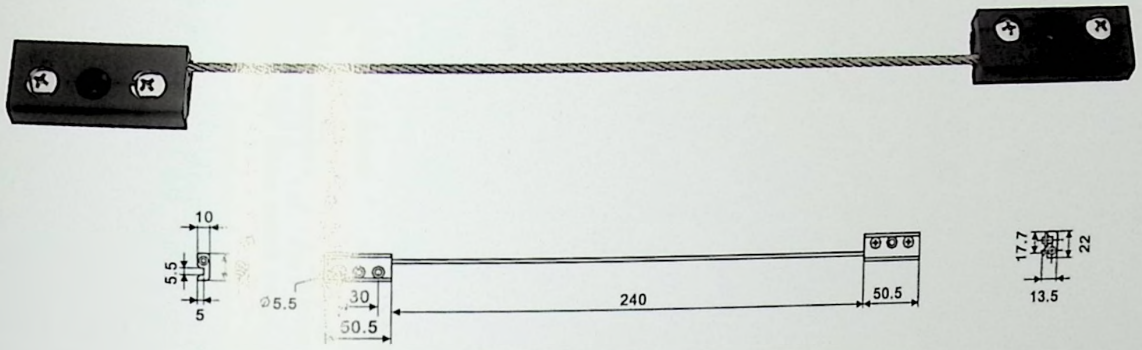

JS-FZ902
平槽防坠落器
Flat grooved anti-falling device /10

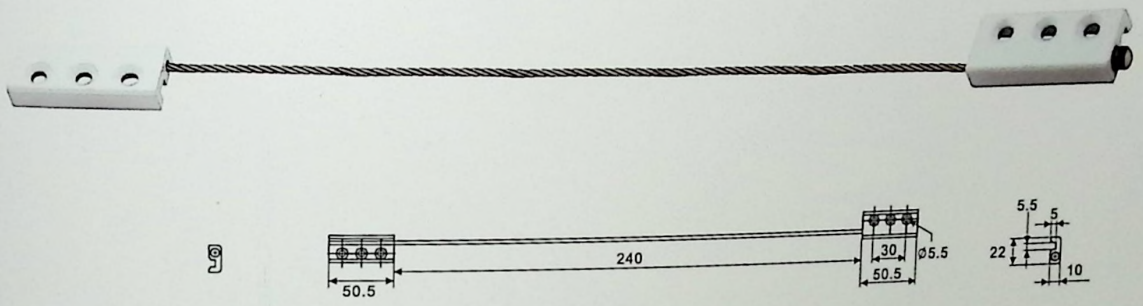

DOOR&WINDOW
HARDWARE
+
The Founder
Of The World-class Product




PUSH PULL HOOK LOCK SERIES

推拉钩锁系列

JS-T766

断桥推拉锁

Bridge-cut-off sliding lock /10






锁钩前后可调±5
弯锁钩可翻转±3 /10

Latch hook can be adjusted ±5
Bent locking hook can rolling over ±3

JS-T765

单面推拉(带锁)

Single-direction push-pull lock (with lock) /10







JS-T768

双面推拉锁(带锁)

Double-direction push-pull lock (with lock) /22



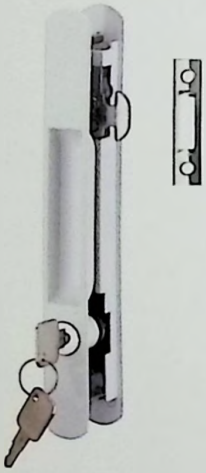


锁钩前后可调±5
弯锁钩可翻转±3

Latch hook can be adjusted ±5
Bent locking hook can rolling over ±3

JS-T769

双面推拉锁(不带锁)

Double-direction push-pull lock (no with lock) /17







锁钩前后可调±5
弯锁钩可翻转±3
Latch hook can be adjusted ±5
Bent locking hook can rolling over ±3

JS-T777

单面推拉锁B(带锁)

Single face push and pull lock B (with lock) /18




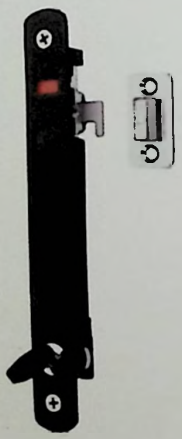


JS-T778


铝型材推拉锁

Aluminum profile push and pull lock

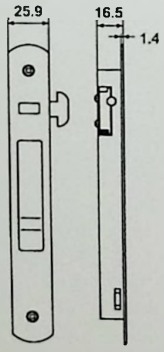


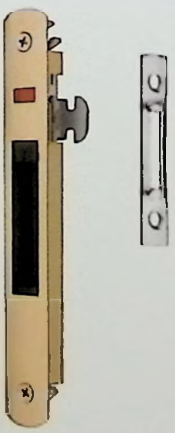


JS-T779
大门拉手
Large door handle /15




JS-T780
大门拉手
Large door handle /20

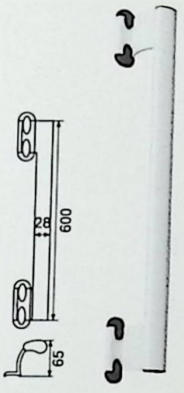


JS-T781
大门拉手
Large door handle 25

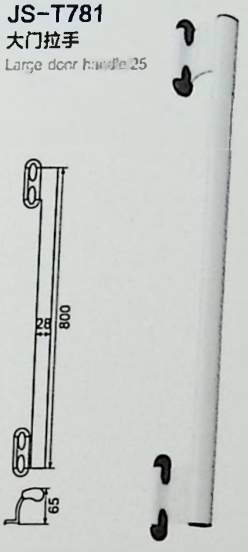


JS-T770
大门拉手
Large door handle /8.5



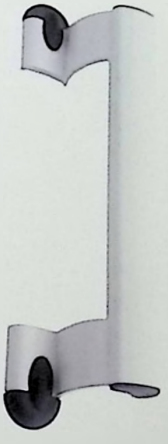


JS-T772
组合推拉勾锁
Combined push & pull hook lock /18

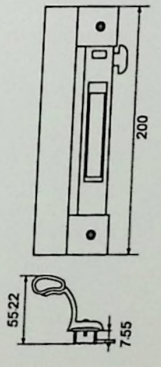





JS-T762
推拉拉手
Push & pull handle /6.5





JS-T771
纱窗拉手
Window screen handle /5






PUSH PULL HOOK LOCK SERIES


推拉钩锁系列

JS-T764
塑料推拉锁
Plastic push pull lock /3.5




锁钩前后可调±5
Latch hook can be adjusted ±5

JS-T763
加纳推拉锁
Ghana push pull lock /8.5




锁钩前后可调±5
Latch hook can be adjusted ±5


JS-T761
推拉锁(拨叉式)
Push-pull lock (Pusher type) /12

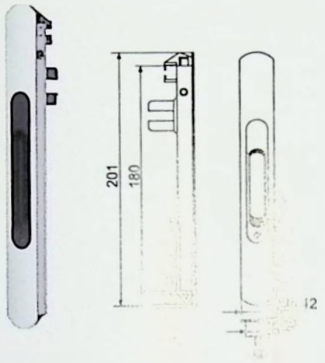

JS-T774
中锁
Mid lock /13



JS-T775
推拉按钮把手
Push-pull knob handle /3.5

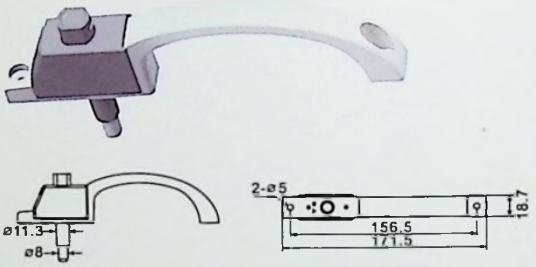


JS-T775
边锁
Side lock /6




JS-T776
碰锁
Latch lock /5



JS-JM942
塑料拉手
Plastic handle /5



JS-FL6606
外贸单轮
Foreign trade single wheel /2



JS-JM970
塑料方三角
Plastic square triangle /2.5




JS-JM971
塑料圆三角
Plastic round triangle /2.5




Http://www.xgsxj.com
E-mail:xgsxj@163.com


1
平扣
Flat buckle /0.5



2
中扣
Mid buckle /0.5



3
大扣
Large buckle /0.9

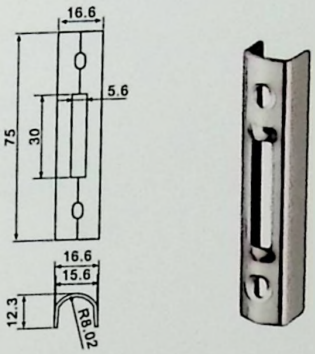


4
长扣
Long buckle /0.5

5
小扣
Small buckle /0.9

6
推扣
Push buckle /0.9

7
碰扣
Touch buckle /2

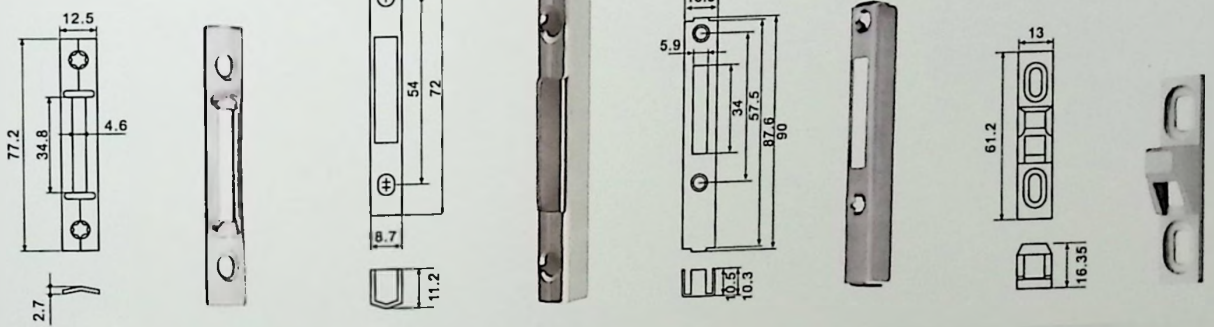


8
短勾
Short hook /0.9

9
长弯勾
Long hook /0.9

10
长平勾
Long hook /0.9

11
推扣
Push buckle /1

12
四孔扣
Round hole buckle /1

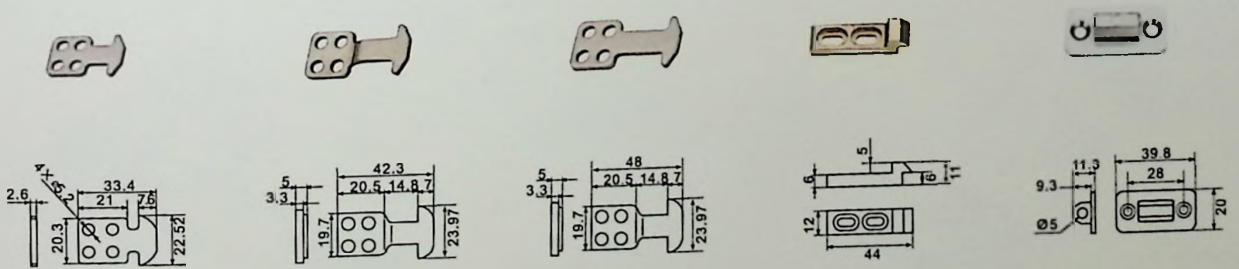


绿色标记为可供选择。
Green marking is available for choice

SERIES OF PULLEY WHEEL

滑轮系列

JS-FL6601


/7






JS-FL6602


/4.5



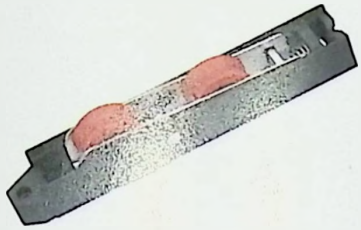

JS-FL6603


/5.5






JS-FL6604


/7




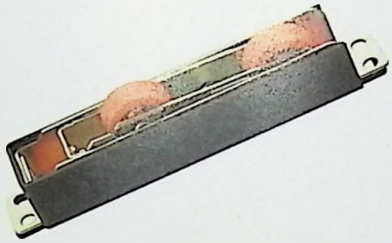

JS-FL6605


/6




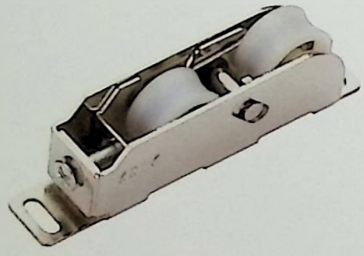

JS-FL6606


/3






JS-FL6607


/7




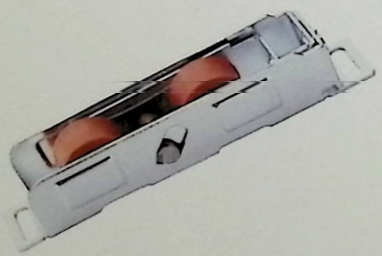


JS-FL6608


/6



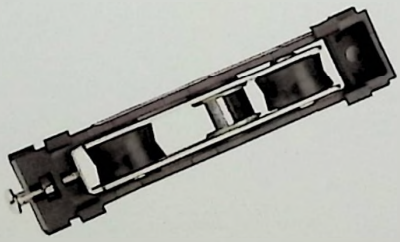


JS-JM933
型材角码(小)
Profile corner brace (small) /5







JS-JM934
型材角码(大)
Profile corner brace (big) /6







JS-JM935
塑料角码(小)
Plastic corner brace (small) /4







JS-JM936
塑料角码(大)
Plastic corner brace (big) /6







JS-JM937
铝角码(小)
Aluminum corner brace (small) /2







JS-JM938
铝角码(中)
Aluminum corner brace (middle) /2.2







JS-JM939
铝角码(大)
Aluminum corner brace (big) /3






JS-JM940
加纳小角码
Ghana small corner brace /2






JS-JM941
加纳大角码
Ghana big corner brace /2.4






JS-JM942
塑料角码
Plastic corner brace /1.6





DRIVER SERIES

传动器系列

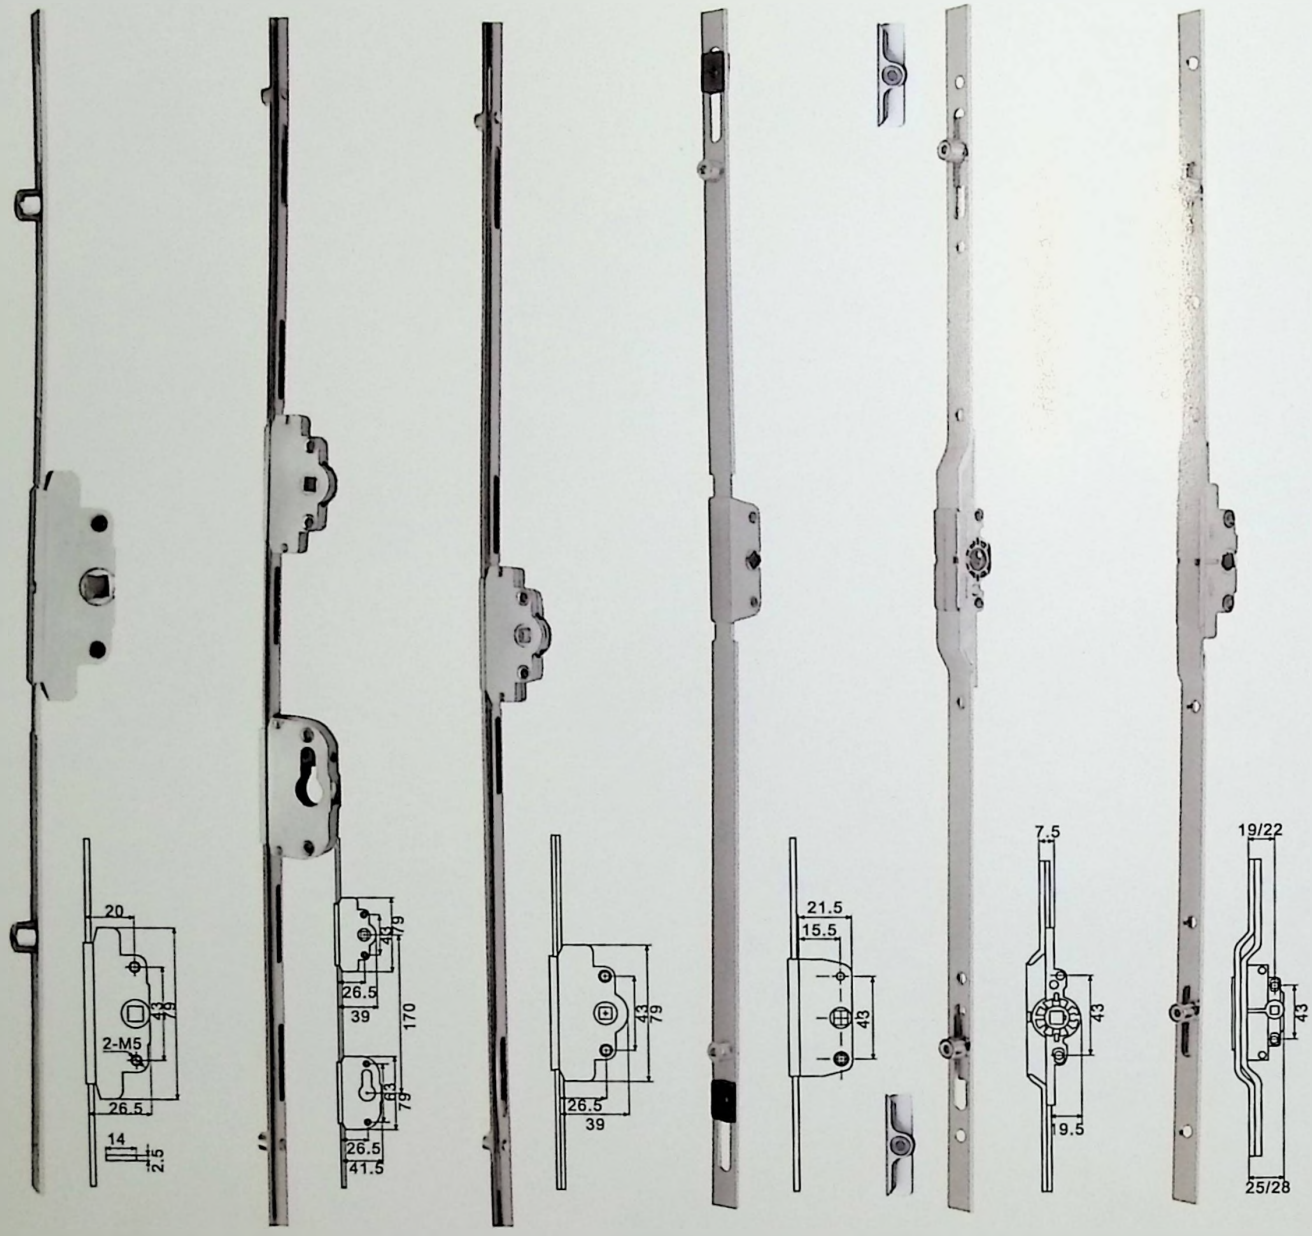

JS-C421
1419单片传动器

规格：600-1200mm
用途：平开、推拉型材

Name:1419 Single driver
Specification: 600-1200 mm
Usage: side-hung and sliding material

/10

JS-C422
168大门传动器总成

规格：1200-1680mm
用途：平开型材

Name: 168 door driver assembly
Specification: 1200-1680 mm
Usage: side-hung material

/30

JS-C423
168大门传动器

规格：1200-1680mm
用途：平开型材

Name: 168 door driver
Specification: 1200-1680 mm
Usage: side-hung material

/25

JS-C424
单片传动器

规格：600-1200mm
用途：平开、推拉型材

Name: Single driver
Specification: 600-1200 mm
Usage: side-hung and sliding material

/10

JS-C425
内开传动器

规格：600-1200mm
用途：平开、推拉型材

Name: Internal open driver
Specification: 600-1200 mm
Usage: side-hung and sliding material

/11


JS-C426
外开传动器

规格：400-1400mm
用途：平开型材

Name: Swing - out driver
Specification: 400-1400mm
Usage: side-hung material

/11.5

Http://www.xgsw.com
E-mail:xgsw@163.com

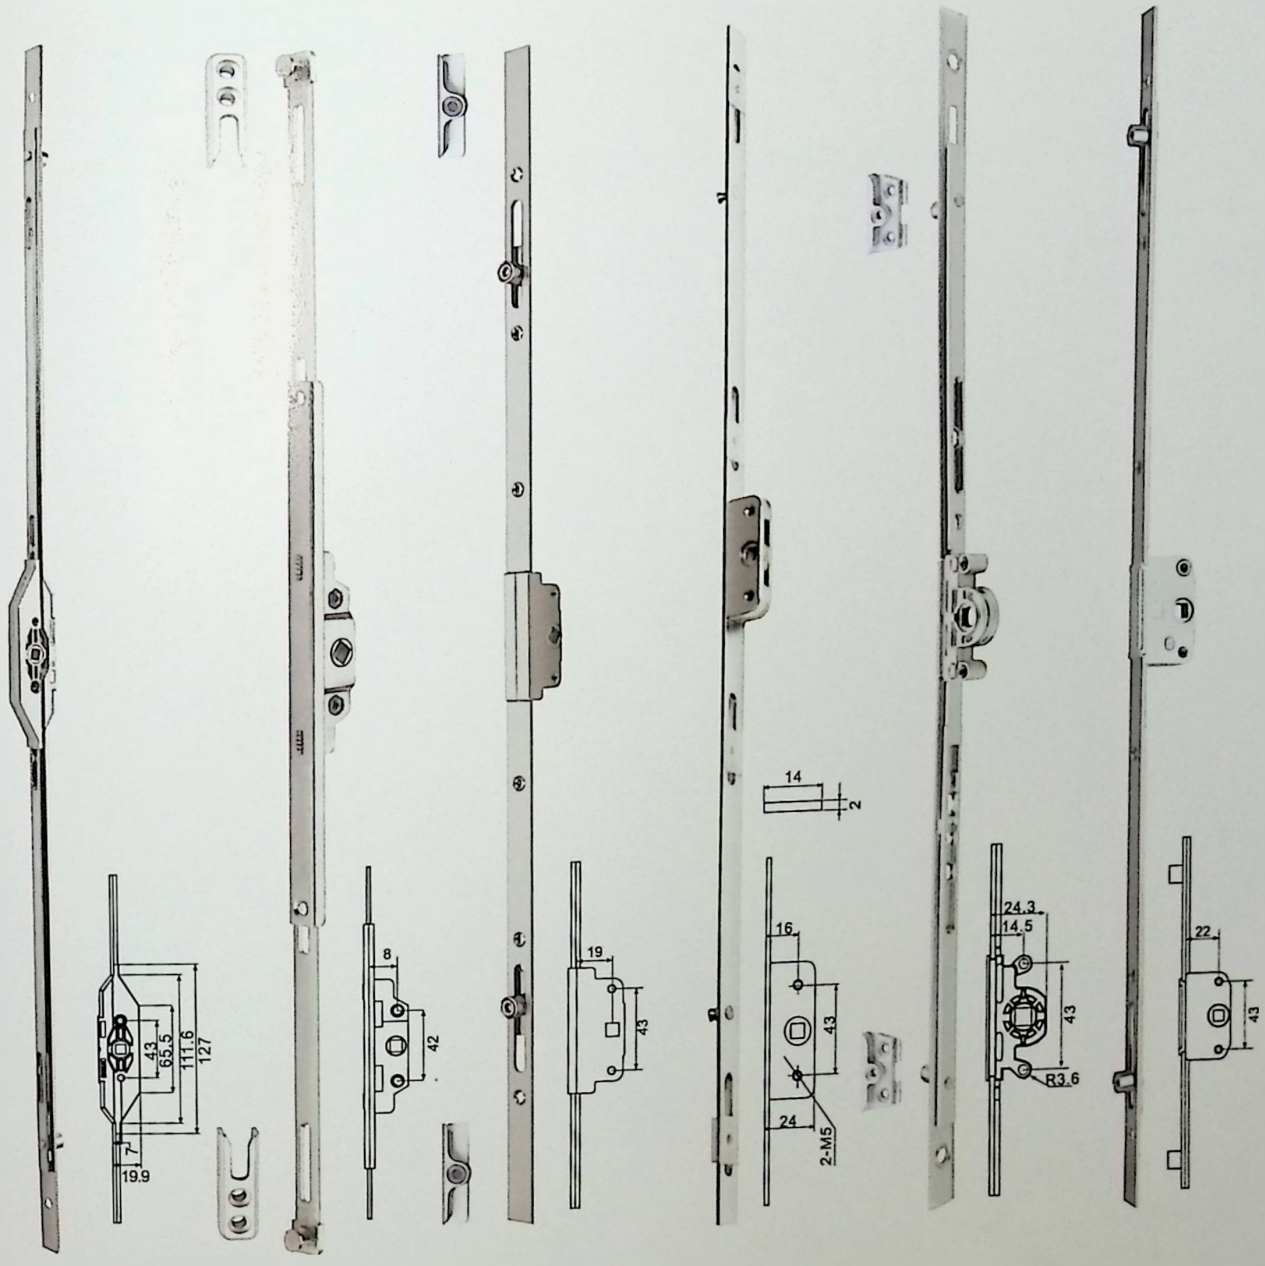

JS-C428
内开双向传动器

规格：400-1200mm
用途：平开、推拉型材

Name: Sliding driver
Specification: 400-1200 mm
Usage: side-hung and sliding material

/12

JS-C430
金刚网传动器

规格：250-600mm
用途：平开型材

Name: Diamond network driver
Specification: 250-600mm
Usage: side-hung material

/10

JS-C431
外开传动器

规格：400-1400mm
用途：平开型材

Name: Swing - out driver
Specification: 400-1400mm
Usage: side-hung material

/1.5

JS-C427
单片传动器B

规格：600-1200mm
用途：平开、推拉型材

Name: Single driver B
Specification: 600-1200 mm
Usage: side-hung and sliding material

/1.5

JS-C429
铝塑传动器

规格：600-1200mm
用途：平开型材

Name: Aluminum driver
Specification: 600-1200mm
Usage: side-hung material

/12

JS-C432
外开传动器

规格：600-1200mm
用途：平开型材

Name: Diamond network driver
Specification: 600-1200mm
Usage: side-hung material


/12

PLASTIC STEEL HINGE SERIES

塑钢合页系列


JS-H5801
标准窗合页68
Standard window hinge 68 /4.2






JS-H5802
多功能合页
Multi-functional hinge /5.5






JS-H5803
加长多功能合页
Lengthened multi-functional hinge /6







JS-H5804
隐藏式合页
Covered hinge /4.2






JS-H5805
加长大门合页(塑盖)
Lengthened door hinge (plastic civer) /18

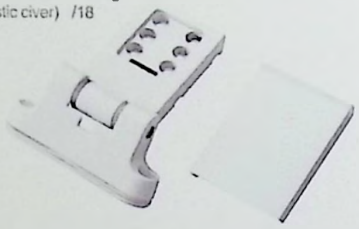




JS-H5806
平板门合页266
Plate door hinge 266 /5.5






JS-H5807
单点锁
Single point lock /6







JS-H5808
新三维大门合页
New three dimensional door hinge /22

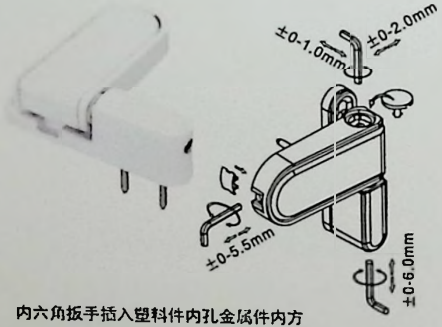

内六角扳手插入塑料件内孔金属件内方可调节（扳手可调节360°）否则扳手会自转！
Adjust by inserting the inner hexagon spanner (the maximum is 360°) into the metalwork in the inner hole of plastic part,other wise,the spanner will turn it self.

JS-H5809
平面合页
Plane hinge /6





JS-A3602

角部铰链（上、下）镀白(9系)


bottom clamp(up and down) white (9 series) /17




JS-B3606

角部铰链（上、中、下）镀黄(13系)


bottom clamp (up, middle and down) yellow (13 series) /25

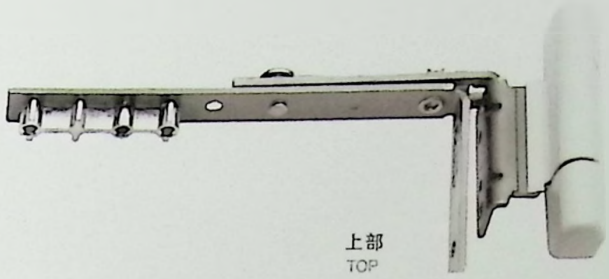





中内扣
MIDDLE LATCH



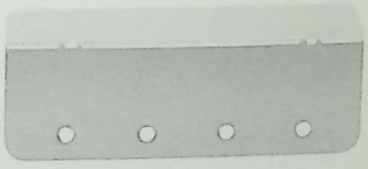

打孔扣模
PUNCTURING AND STICKING

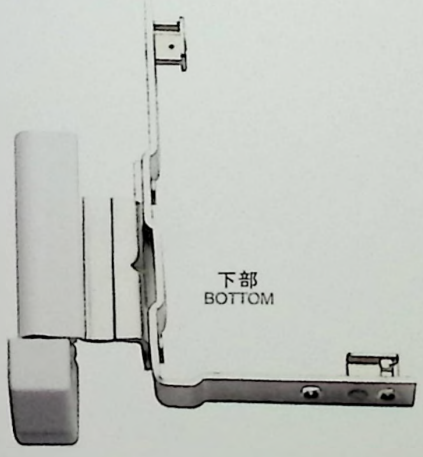


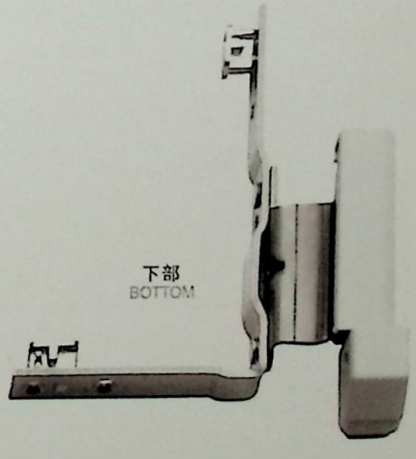


INTELLECTUAL
WINDOW REGULATOR SERIES

智能开窗器系列

JS-ZN001 电动开窗器
Electric window regulator /470

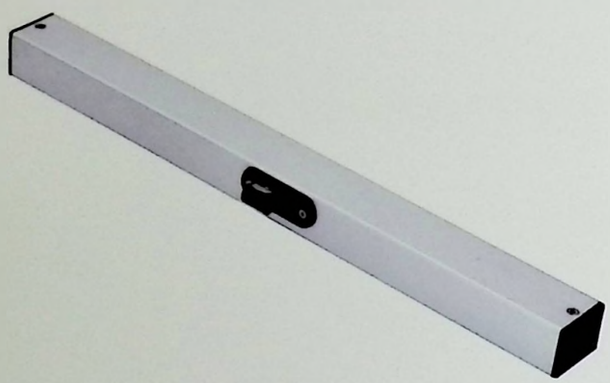


链条式开窗器>
Chain type window regulator /470

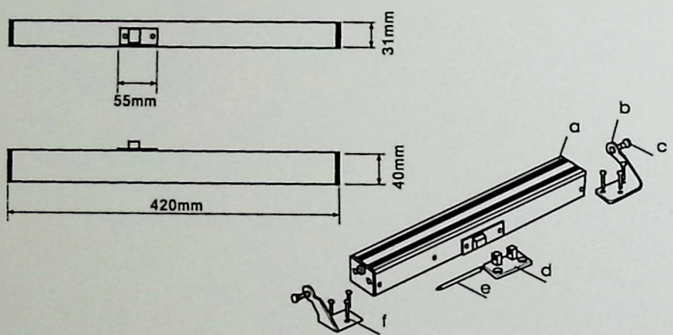


应用范围及安装

电动链条开窗机广泛应用于：上悬窗、下悬窗、中悬窗、天窗和平开窗等。
安装灵活，根据有没有窗台的情况，配合固定码不同的安装方式。

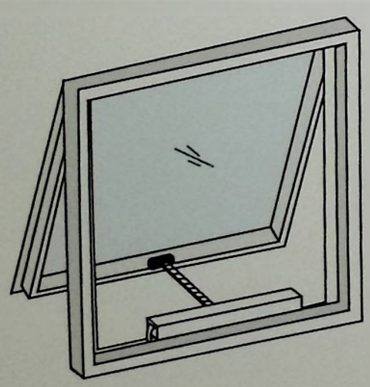

上悬开外窗上的安装
Upper suspension & external open window's installation


JS-ZN002 雨水感应开窗器
Rainwater sensing window opener /550

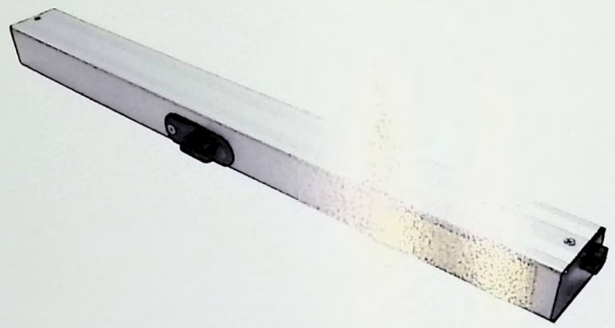

链条式雨感开窗器>
Chain type rainwater sensing window opener /550

特点
1.精巧的外形设计。
2.超负荷过载保护。
3.用于排烟、排热的电动推拉窗。
4.大于10000次推出与拉测试。

CHARACTER:
1.Elaborate configuration design
2.Overload protection
3.Electric push-pull window for smoke and heat removal
4.Over 10000 push and pull testing

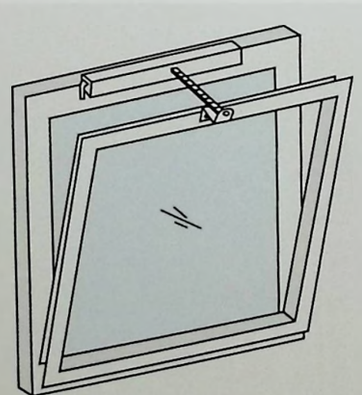


下悬内倒窗上的安装
Lower suspension & internal open window's installation

JS-ZN003 电动开窗器
Electric window regulator /1100

特点
1.精巧的外形设计。
2.超负荷过载保护。
3.用于排烟、排热的电动推拉窗。
4.大于10000次推出与拉测试。

CHARACTER:
1.Elaborate configuration design
2.Overload protection
3.Electric push-pull window for smoke and heat removal
4.Over 10000 push and pull testing







遥控器>
Remote controller /70

墙壁开关>
Window switch /85

双链条式开窗器>
Double chain type
window opener /1150

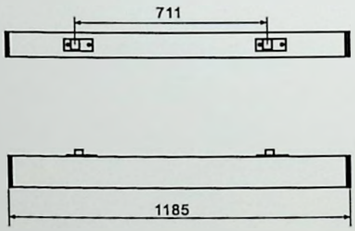

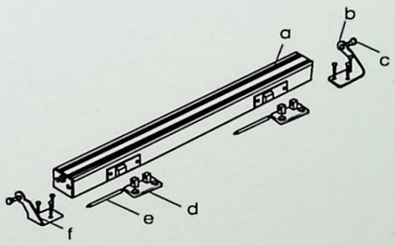


配件说明
A:电动链条式开窗器
B:安装支架
C:六角螺钉
D:链条固定架
E:链条固定插销
F:Ø5圆头自攻螺钉

ACCESSORIES:
A:Eiectric chain motor
B:Braket
C:Hexagonal head screw
D:Chain fix holde
E:Pin
F:Ø5 self tapping screw

应用范围及安装
电动链条开窗机广泛应用于：上悬窗、下悬窗、中悬窗、天窗和平开窗等。
安装灵活，根据有没有窗台的情况，配合固定码不同的安装方式。

APPLICATION RANGE AND INSTALLATION:
The electric window machine is widely applied to: top-hung window, lower-hung window, middle-hung window, dormant window and side hung window

Flexible installation, select different installation manners according to windowsill condition

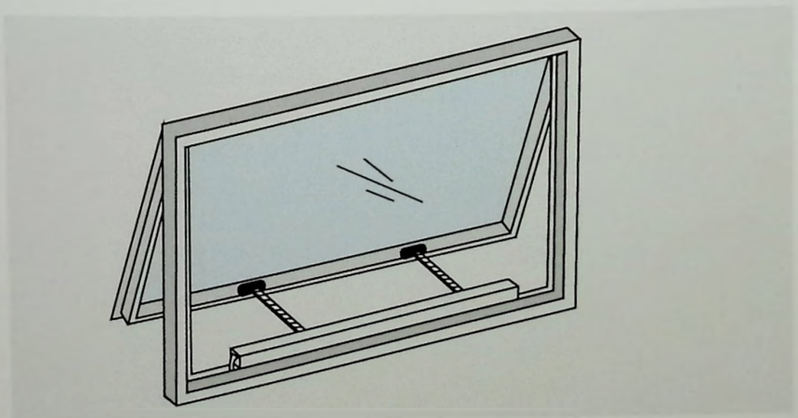

上悬开外窗上的安装
Upper suspension & external open window's installation




消防联动控制箱
Fire fighting control box /240V-4000

PART OF THE SHOW

部分工程展示



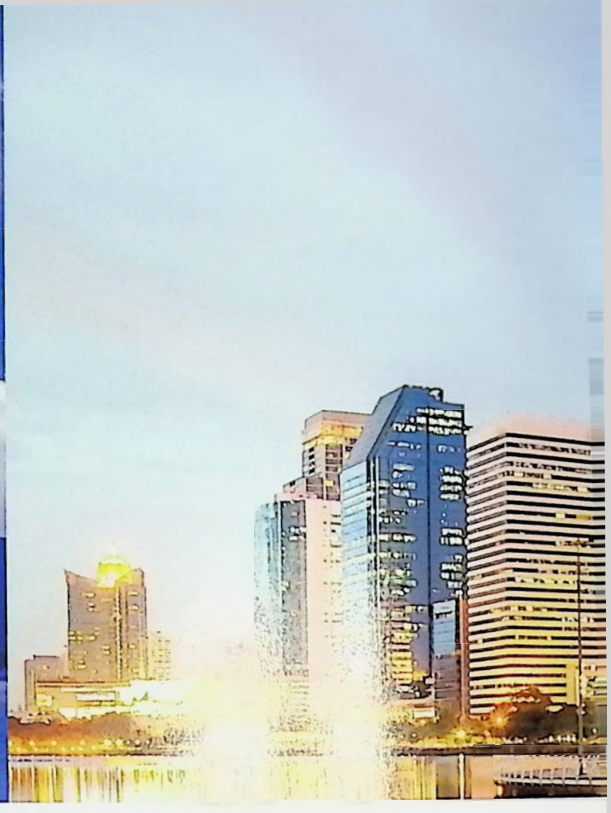

绿城集团 GREENTOWN　万达地产 WANDA REAL ESTATE　万科地产

北京

新闻广播发布中心
康达尔花园
联泰大楼
中央豪门
廷庆里炮改造
廷庆区民政局办公楼
廷庆区一分田老车公寓
张家口市中延滨河道府
小浮坨二期
北京中铁
北京航天大学
北京万宁小区
北京世界名园

辽宁

山海壹号
华凡世纪城
润鼎名府
天元广场
文博苑
万海之家
石油集团综合楼
红星港城御园
香墅湾家园
美域华府
中海域
新世纪花园

上海

香港广场
海尚佳园
华清大厦
百汇园二期
东方花园
上海富强花苑
威尼斯五星级酒店
国家行政学院
浦东三期总部大楼
上海银信金融
国际金融中心大厦
黄埔凌安置工程
上海融欣地产
上海升龙控资集团
金洋房地产
上海中山学院
上海信谊药厂
上海海关缉私局
上海国药物流大楼
上海济光学院
上海嘉定区华亭敬老院
上海海关缉私局
上海国药控股二期
上海信宜药厂
上海南汇兆泵站

广东

华远地产
恒亿集团
盐山南杨凤台小区
武强北方家园
新境界花园
合正景园
广州城建控资公司
五洲国际控股

天津

天津武青盛世天下
天津辛庄小学
西青大地城
金水湾二期
春之声大厦
中国电信大厦
临港投建设大厦
大港油田大楼
远东国际大厦
平安保险公司
东江商务广场
国宾酒店
盛世年华
鸿隆国际
天津高盛房地产

河北

怀特集团商业楼
邯郸赵都新城
武警大楼
滦南鸿泰御景园
滦南北苑华府
曹妃甸富岛国际
唐山创新大厦
北京悦康药业

浙江

温州绿洲豪庭
温州瑞都豪庭
瑞安塘下法院
瑞安香榭景园
瑞安星海广场
温州瓯江新城
中央华府
金色假日
华侨新苑
香樟绿洲
天马别墅
瑞安天瑞
瑞安人民医院
光大银行
美亚花园
三盘领海
温州民航航站楼
海湾家园
余姚欠湖村保障性住房 二期
杭州恒大建材市场
杭州天城银座大厦
平湖开元悦郁小区
蓝湾半岛
杭州滨江地产
杭州八保公寓
长兴新城丽景花园
浙江佳源房地产



万达地产 WANDA REAL ESTATE

万科地产

山东

烟台山水龙城
烟台山海龙城
日照卧龙山小学
临朐粟山佳苑
临朐江北物流域
齐鲁石化科鲁尔工程
临朐东方丽景
烟台莱州市云峰丽景
潍坊市歌尔公寓
威海会泉娱乐会所
诸城杨春集团工程
青岛西海岸新区
烟台山水龙城
烟台牟平山海龙城
泰安绿地公馆
泰安蓝岸湿地
济宁绿地
青岛黄埠岭小区
潍坊奥博莱花园
临沂十里洋房
茌县金海居小区
章丘马安村改造
章丘贺套村改造
章丘查旧村改造
章丘货场旧村改造
聊城鸿基地产
济南老峪村改造
章丘新四中
章丘交通技校
济南大学泉城学院
德州阳光花园
德州学府花园
佰利金湖湾
济南三板小镇
济南东城花苑
济南金如意小区
济南李东西安置区

内蒙古

凤凰又一城
包头龙藏福瑞花园
包头职业技术学院
包头蕾家营住宅小区
包头包钢研究院
恒泰盛都
印象江南
维多利新天地
星词国际
嘉和江景湾
水语悟域
名珠丽景
内蒙古新长矿业大厦

江苏

星苏花园
海悦嘉园
嘉宏云顶
龙景花园
高科荣境
宋都美君
昆山九城

陕西

嘉禾中心
西海明珠
星华大厦
新世纪花园
世纪之春
联通大厦
西安海荣房地产

宁夏

前程家园
新安家园
河滩中心村
平伏桥新村
铁丰苑
圣菲产业园
吴忠市祥和大厦
欧蓓莎商业园
中卫亚泰大厦
滨河首府
中卫沙波头水镇
宁夏西吉香树花城
银川城市公元
银川物华兴洲苑
济南中铁诺德名城
中铁诺德名府
万科翡翠山语
万科中都府
万科百脉悦府
万科悦峰

江西


牧马庄园
德安宝城
天伦锦城
港西新城
粟山佳苑
邯郸时代广场
智高常春藤
高碑店金港国际
廊坊市汇智综合大楼
南昌昭督大厦

重庆

重庆未来城
爱与山
渝兴广场
拓展口区
唐家沱第十八中学
重庆彩云湖小学
壁山人民医院
金易E世界
中中公园
卓达九曲河
卓大广安项目
书香溪墅


新疆

乌鲁木齐新天润别墅
江山紫郡商住小区
王家梁总裁养心苑
阿克苏御溪谷
阿克苏御景湾
额敏友好新城
额敏天合家园
石河子61小区

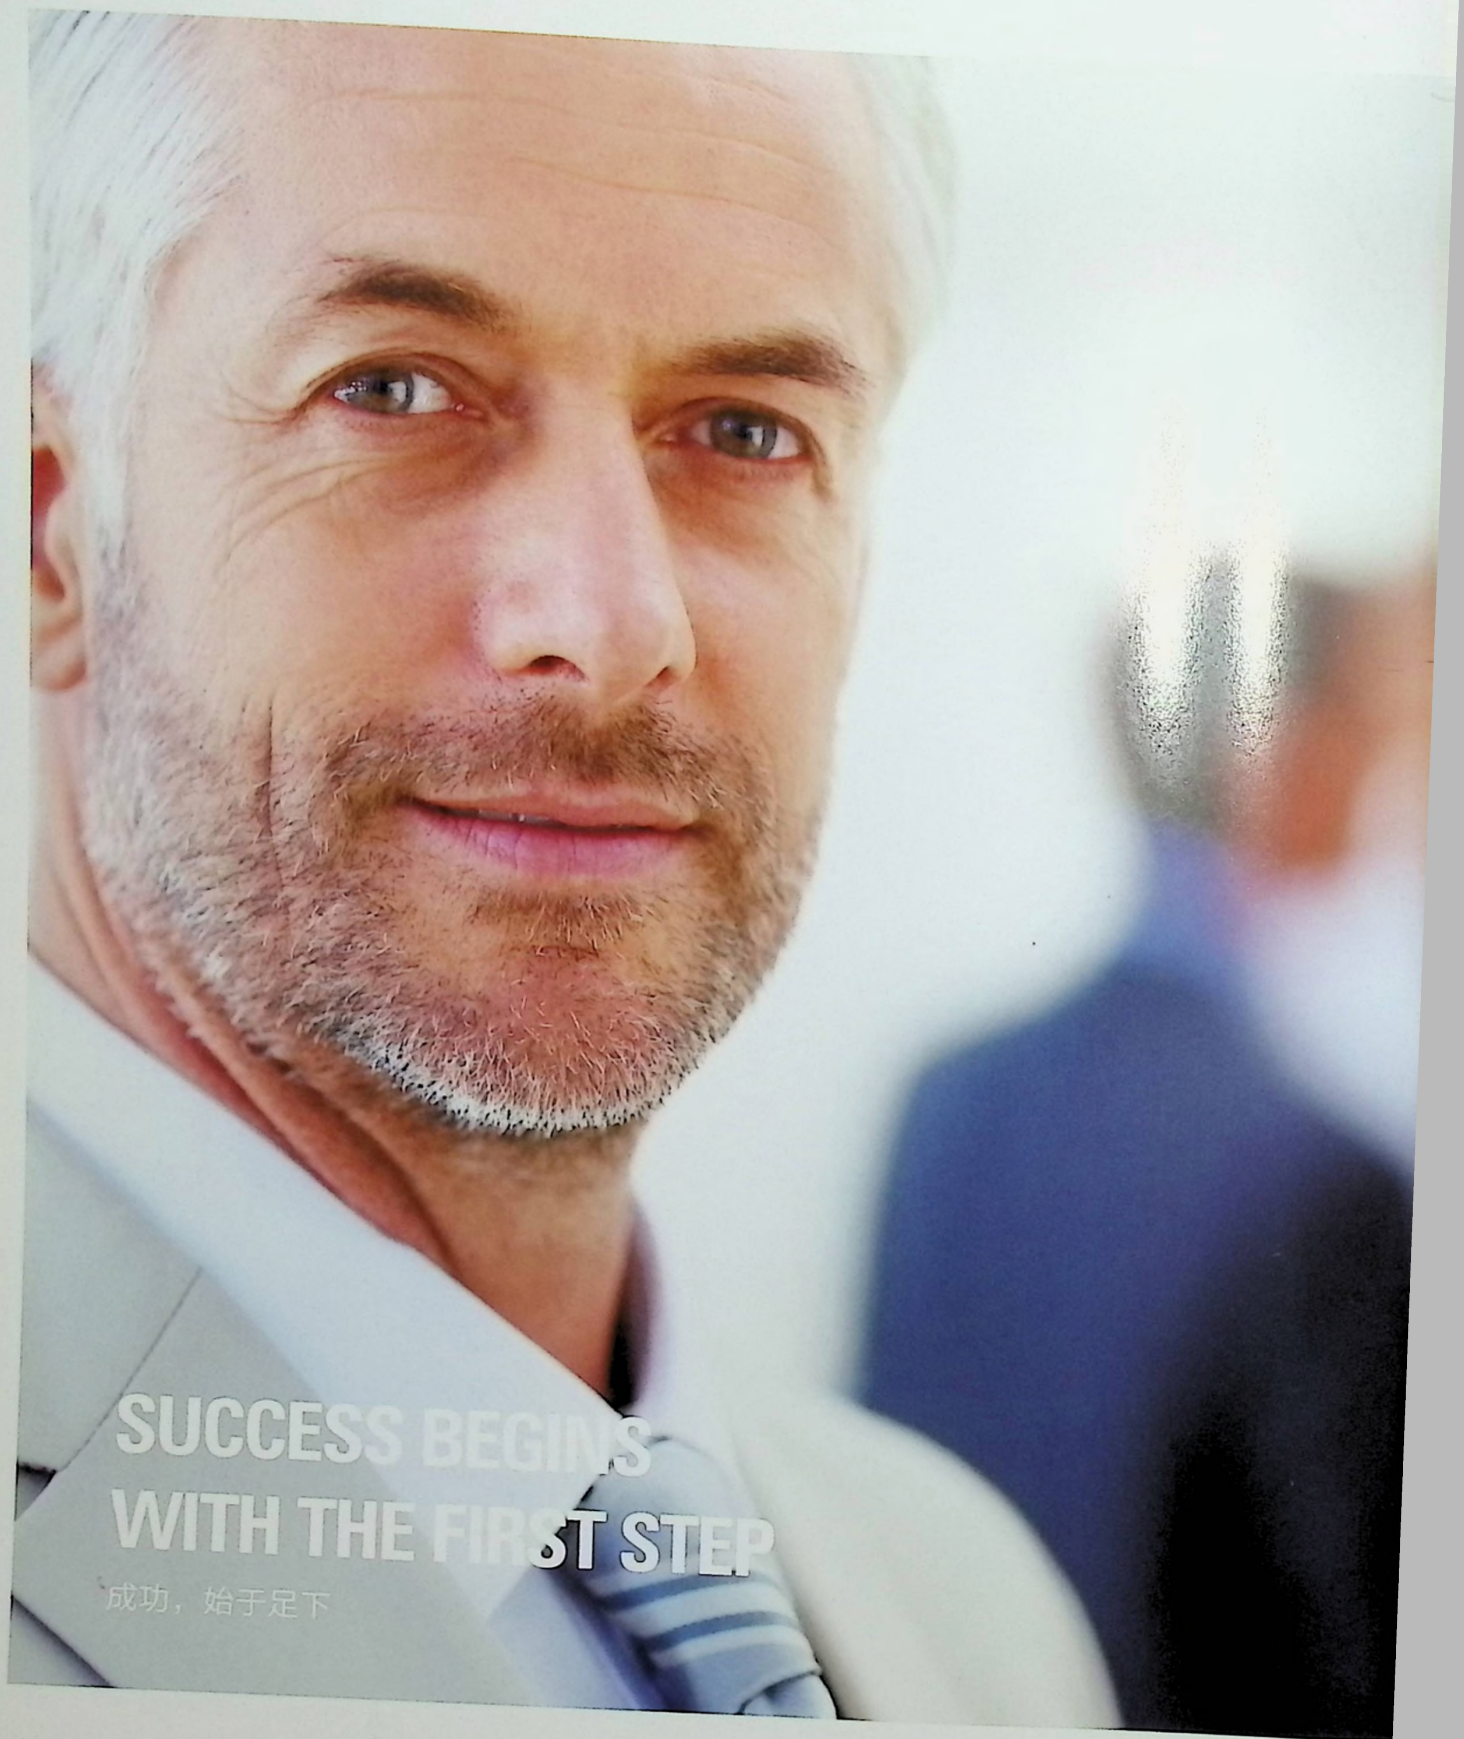
SUCCESS BEGINS
WITH THE FIRST STEP
成功，始于足下

企业的发展需要高瞻远瞩，更需要脚踏实地，一步一步坚实的走来！一路上，有挥洒的汗水，有努力的激情，有成功的欢愉。这一切，有您见证，更希望与您一同分享！

The development of an enterprise needs both great foresight and down-to-earth work. We've developed step by step. On the road of development, there are sweat, passion and happiness. All of these are witnessed by you, and we wish to share them with you!




































RUI'AN JIANSHENG TRIM HARDWARE CO.,LTD.
五星级配件

瑞安市坚圣门窗五金有限公司
RUI'AN JIANSHENG TRIM HARDWARE CO.,LTD.

地址：瑞安市塘下镇筸平垟南路201号
(Add):No.201 Zhaopingyang South Rd, Tangxia town, Rui' an city .
电话(Tel)：0577-66006788 66006799
传真(Fax)：0577-66005799
http://www.xgjswj.com
www.wzjswj168.cn.alibaba.com
E-mail:xgjswj@163. com
QQ：528954448

香港坚圣五金国际集团有限公司
HONG KONG JIANSHENG HARDWARE INTERNATIONAL GROUP

地址：香港新界葵涌昌路26-38号豪华工业大厦23楼B07室
(Add):Rm B07, 23/F Luxury Industry Mansion,
No.26-38 Kuiyongchang Rd, New Territories, Hongkong
全国服务热线(National Service Hotline)：400-826-7767
http://www.wzjswj168.cn.com

坚圣门窗五金
企业微官网>
JIANSHENG
DOOR&WINDOW
HARDWARE
ENTERPRISE
WECHAT OFFICIAL
WEBSITE>

谢尚志—
门窗五金>
XIE SHANG ZHI
DOOR&
WINDOW
HARDWARE>

- 企业保留更改产品设计与规格的权利，届时您不另行通知。所有资料经过小心核对，以求准确，如果有任何印刷错漏或在制作中可能产生之误差，本公司不承担由此产生之后果。印刷过程可能令资料内的产品颜实物有轻微分别，选择产品均以实物为准。
- 版权由坚圣公司所有，严禁翻版和影印，本公司产品严禁申请专利，严禁仿制，违者负法律责任。
- Preserves the right to change the product design and specifications without notice All infomation is carefully checled for accuracy. We shall not be sccountable for damages caused by any possible faults or errors in the printing and publishing process You choice of product shall be made gainst the material object as the productpicture may have slight difference with the material oject the printing process.

All right reserved by Jiansheng company. strictly prohibited to copy and reprint. Prohibit to apply for patent and reproduce the product of our company. offenders shall assume the legal responsibility.